Uninformed Graph Search (for Paths)

CS 483 (001) - Spring 2017

Amarda Shehu

Department of Computer Science
George Mason University, Fairfax, VA, USA

Spring 2017

1. Outline of Today's Class

2. Example Problems

3. Elementary (Graph) Search Algorithms
   - Uninformed Search
     - Breadth-first Search (BFS)
     - Depth-first Search (DFS)
     - Depth-limited Search (DLS)
     - Iterative Deepening Search (IDS)

Problem: Traveling in Romania

On holiday in Romania; currently in Arad.
Flight leaves tomorrow from Bucharest.

Formulate goal:
be in Bucharest

Formulate problem:
states: various cities
actions: drive between cities

Find solution:
sequence of cities, e.g., Arad, Sibiu, Fagaras, Bucharest

Example: Romania

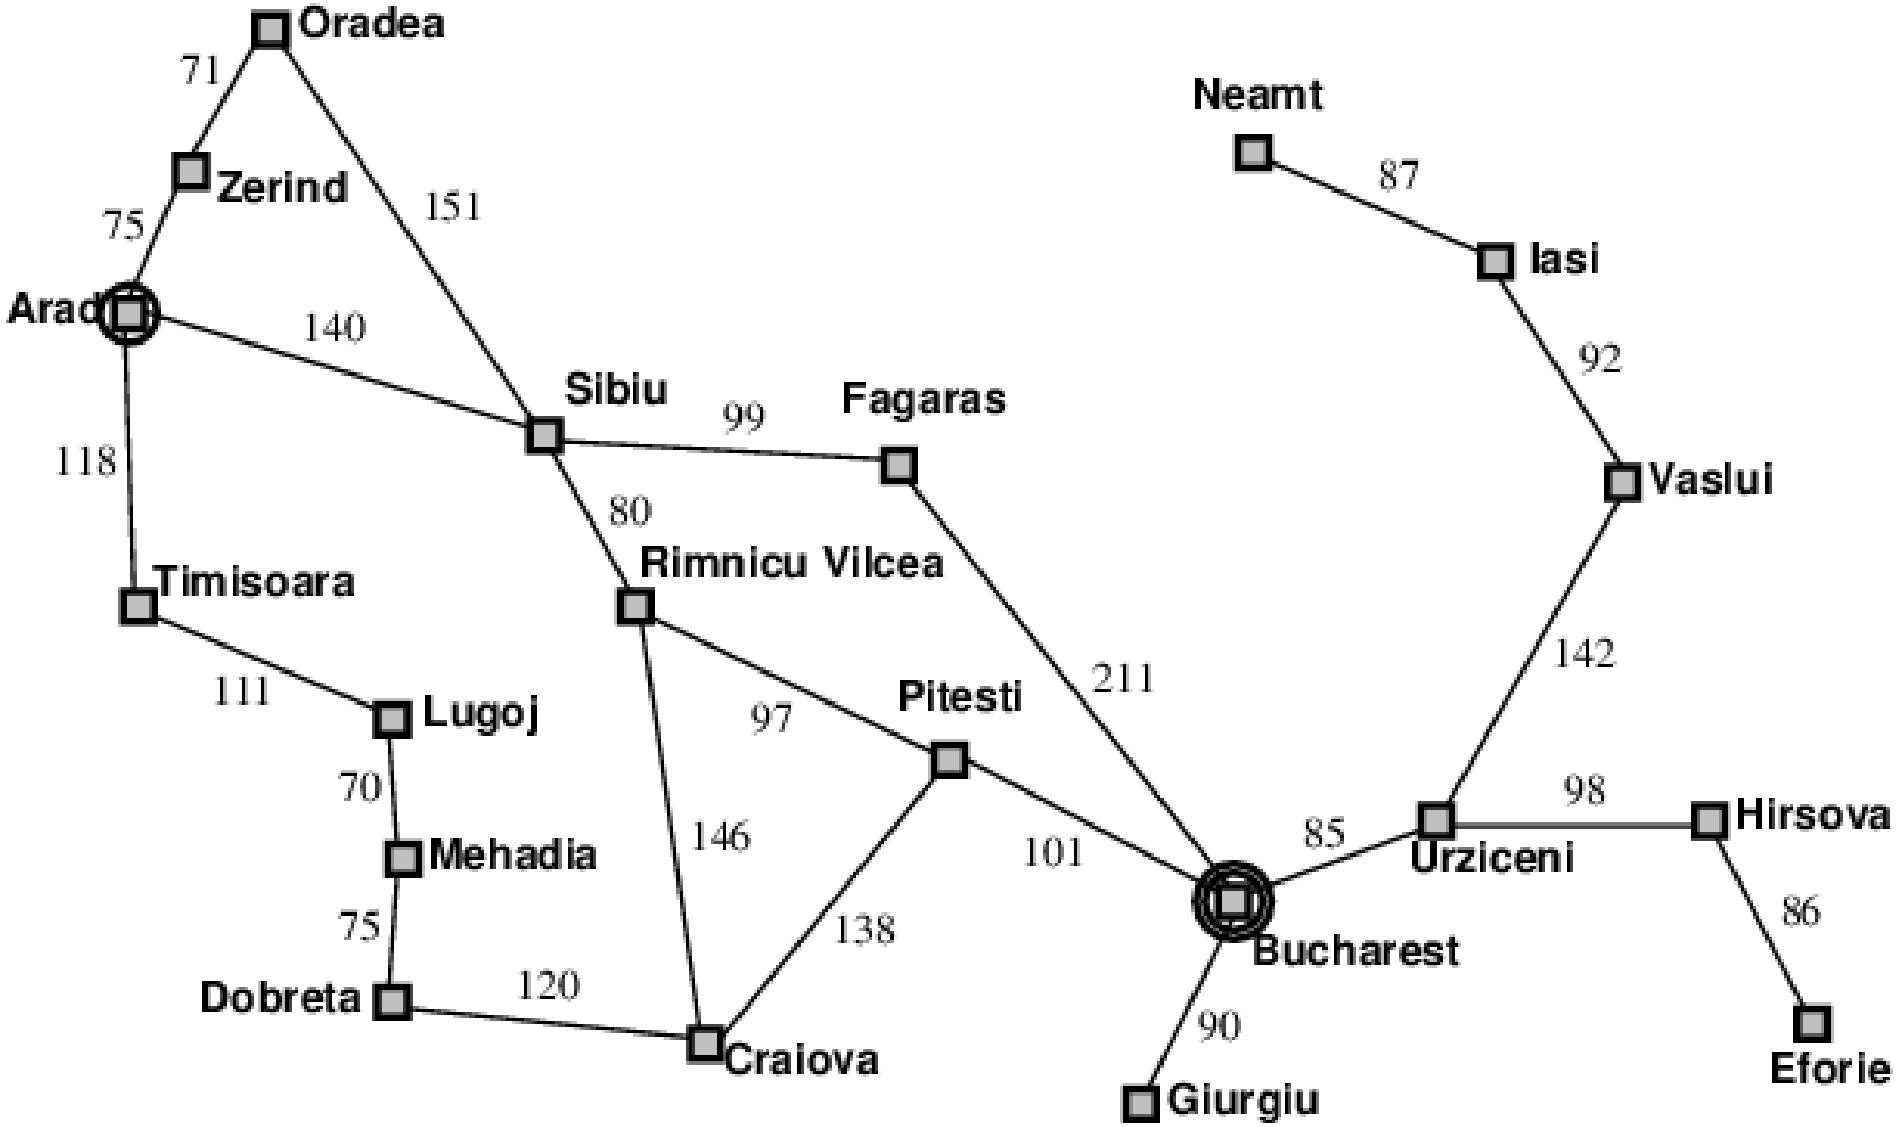

Single-state Problem Formulation for Route-Finding

A problem is defined by five components:

1. **Initial state** e.g., "In(Arad)"
2. **Actions** e.g.
   ACTION(Arad) = { Arad → Timisoara, Arad → Sibiu, ..., Arad → Zerind }
3. **Transition model**
   e.g. RESULT(Arad, Arad → Zerind) = Zerind
4. **Goal test**, can be:
   - **explicit** e.g., "In(Bucharest)"
   - **implicit** e.g., $NoDirt(s)$
5. **Path cost** (additive)
   e.g. sum of distances, number of actions executed, etc.
   - $c(x, a, y)$ is the step cost, assumed to be ≥ 0

Solution:

A **solution** is a sequence of actions leading from the initial state to a goal state
The process of looking for a solution is called **search**

State Space Graph

- State space graph: A mathematical representation of a search problem
- Nodes are (abstracted) world configurations
- Arcs/edges/links represent successors (action results)
- Goal test is a set of goal nodes (maybe only one)
- In a state space graph, each state occurs only once!
- We can rarely build this full graph in memory (its too big), but its a useful idea

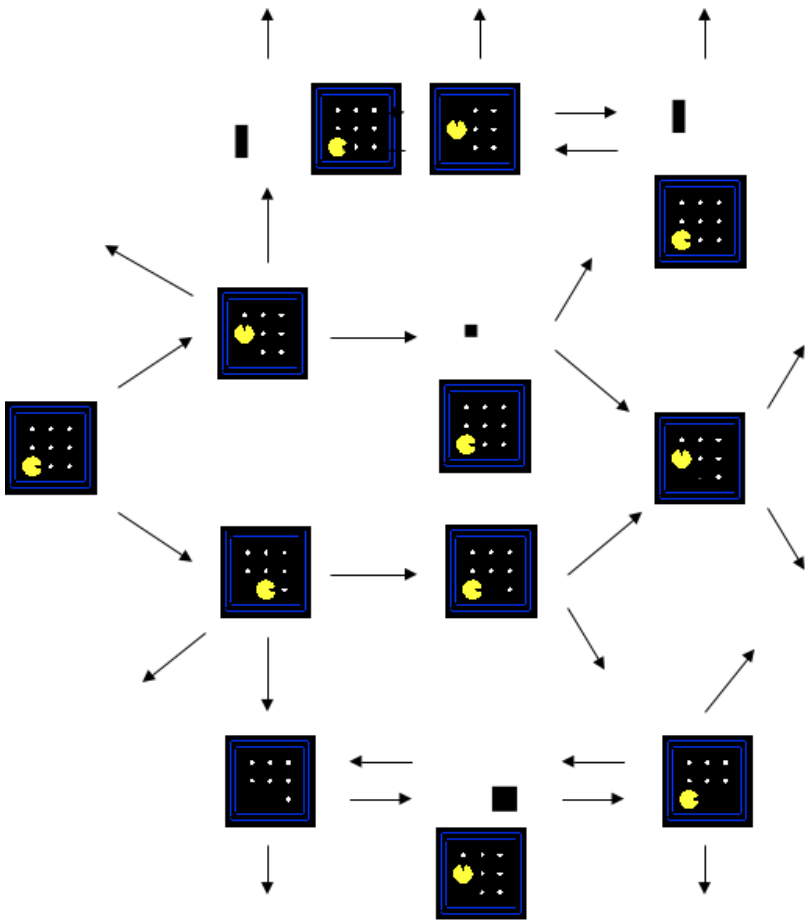

Example: Vacuum World State Space Graph

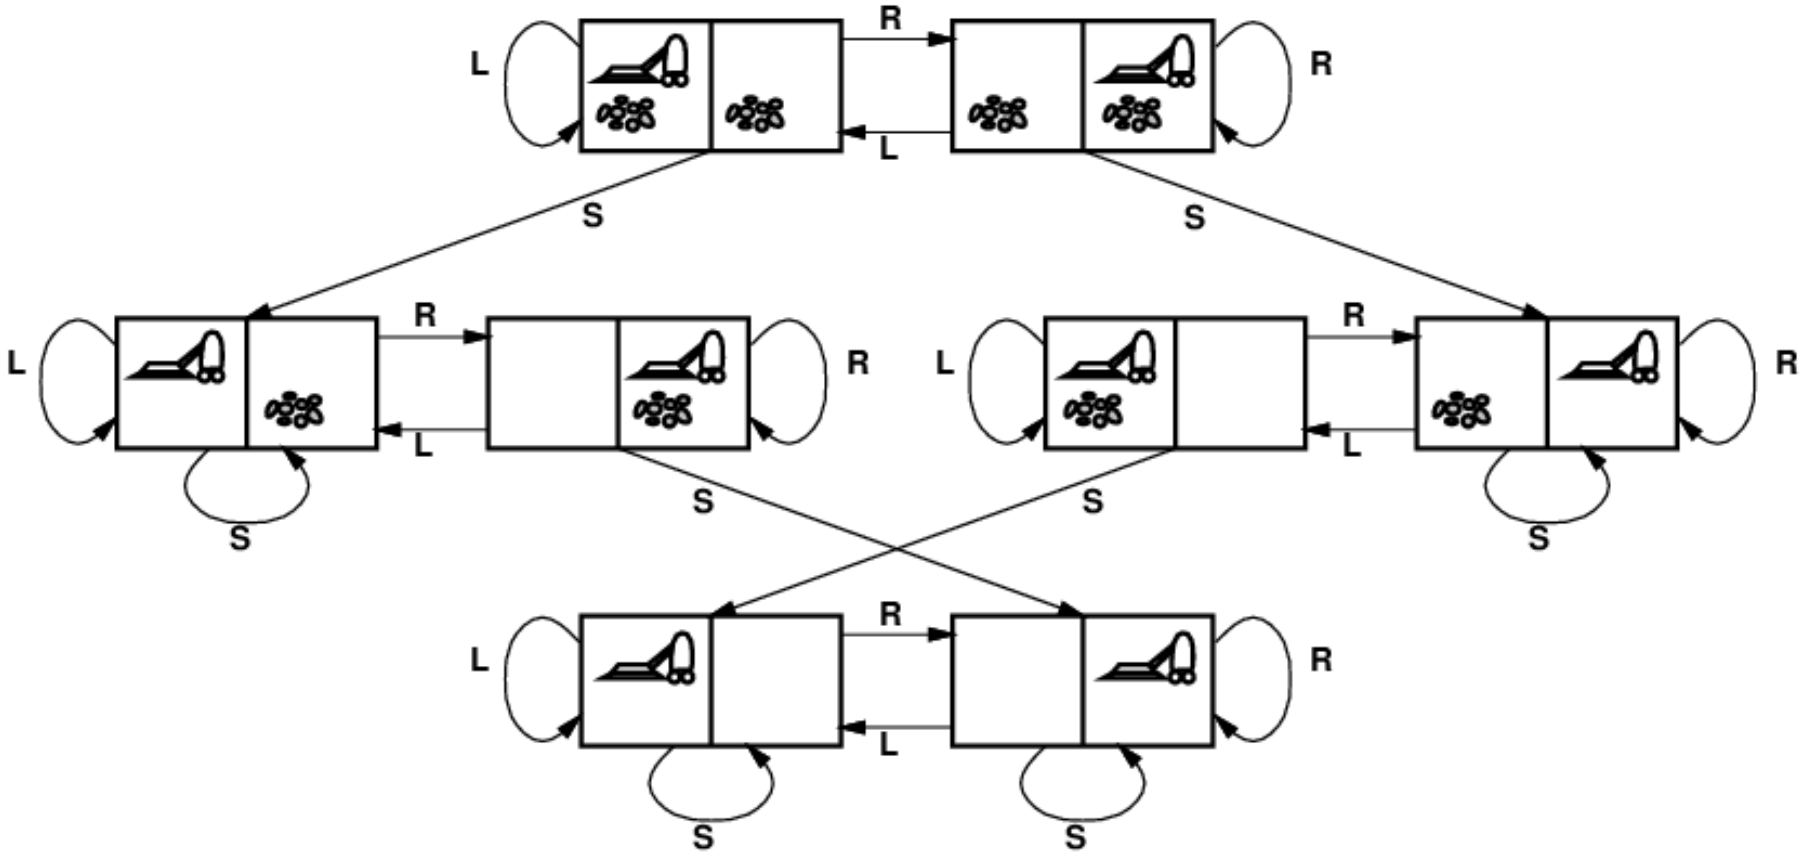

states??:

Example: Vacuum World State Space Graph

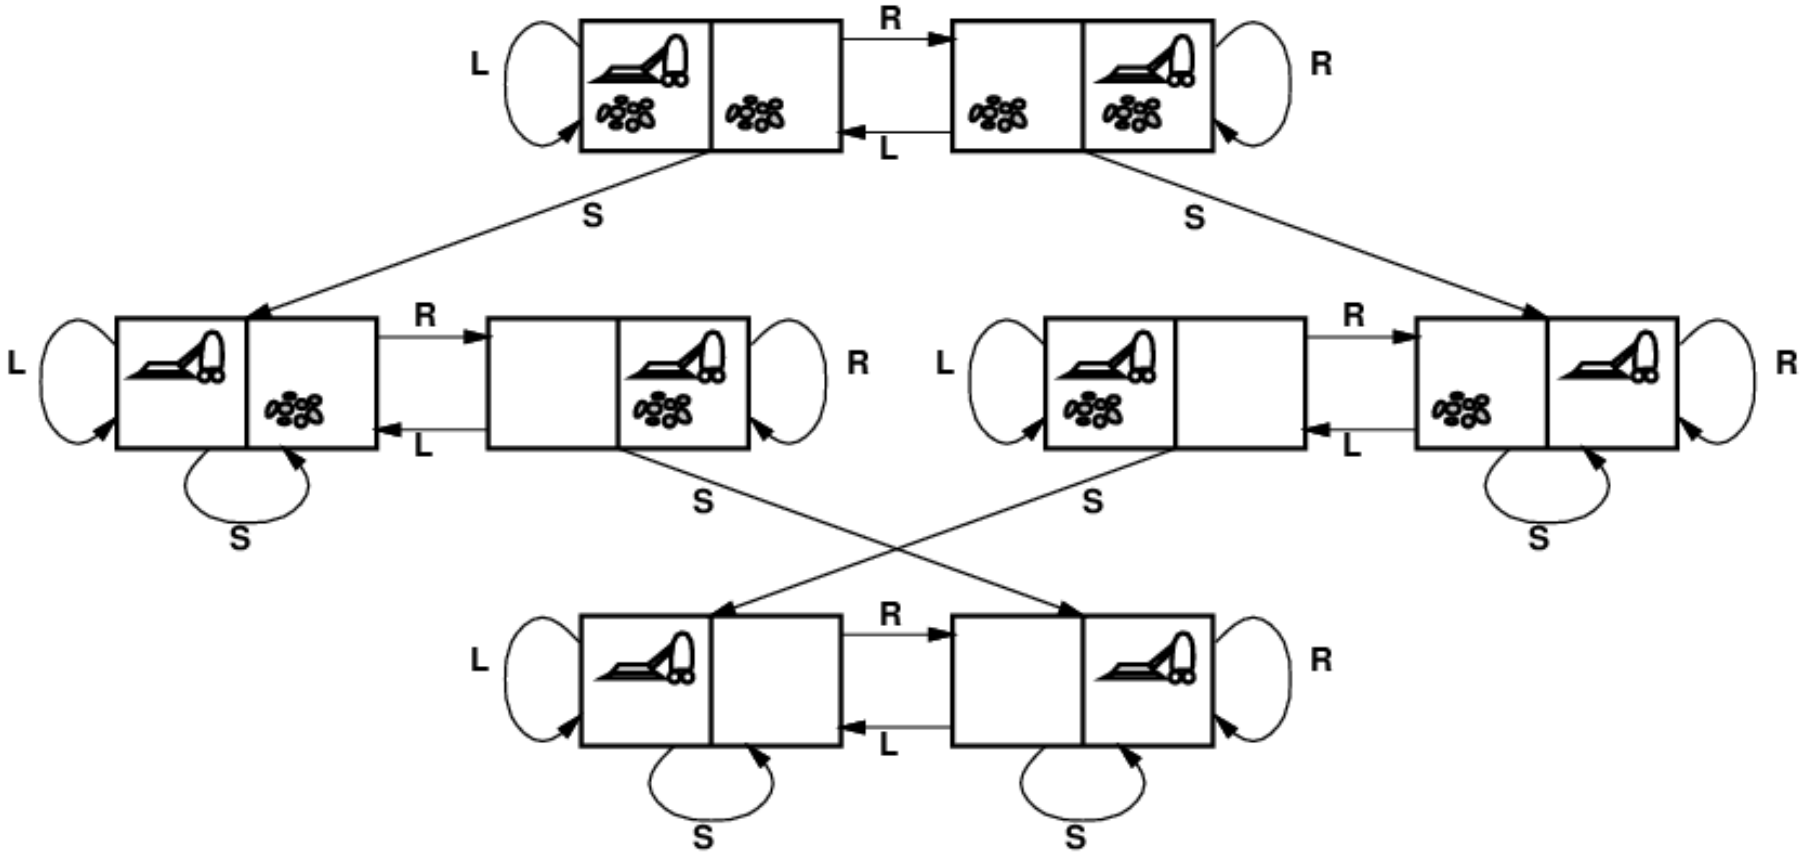

states??: integer dirt and robot locations (ignore dirt **amounts** etc.)

Example: Vacuum World State Space Graph

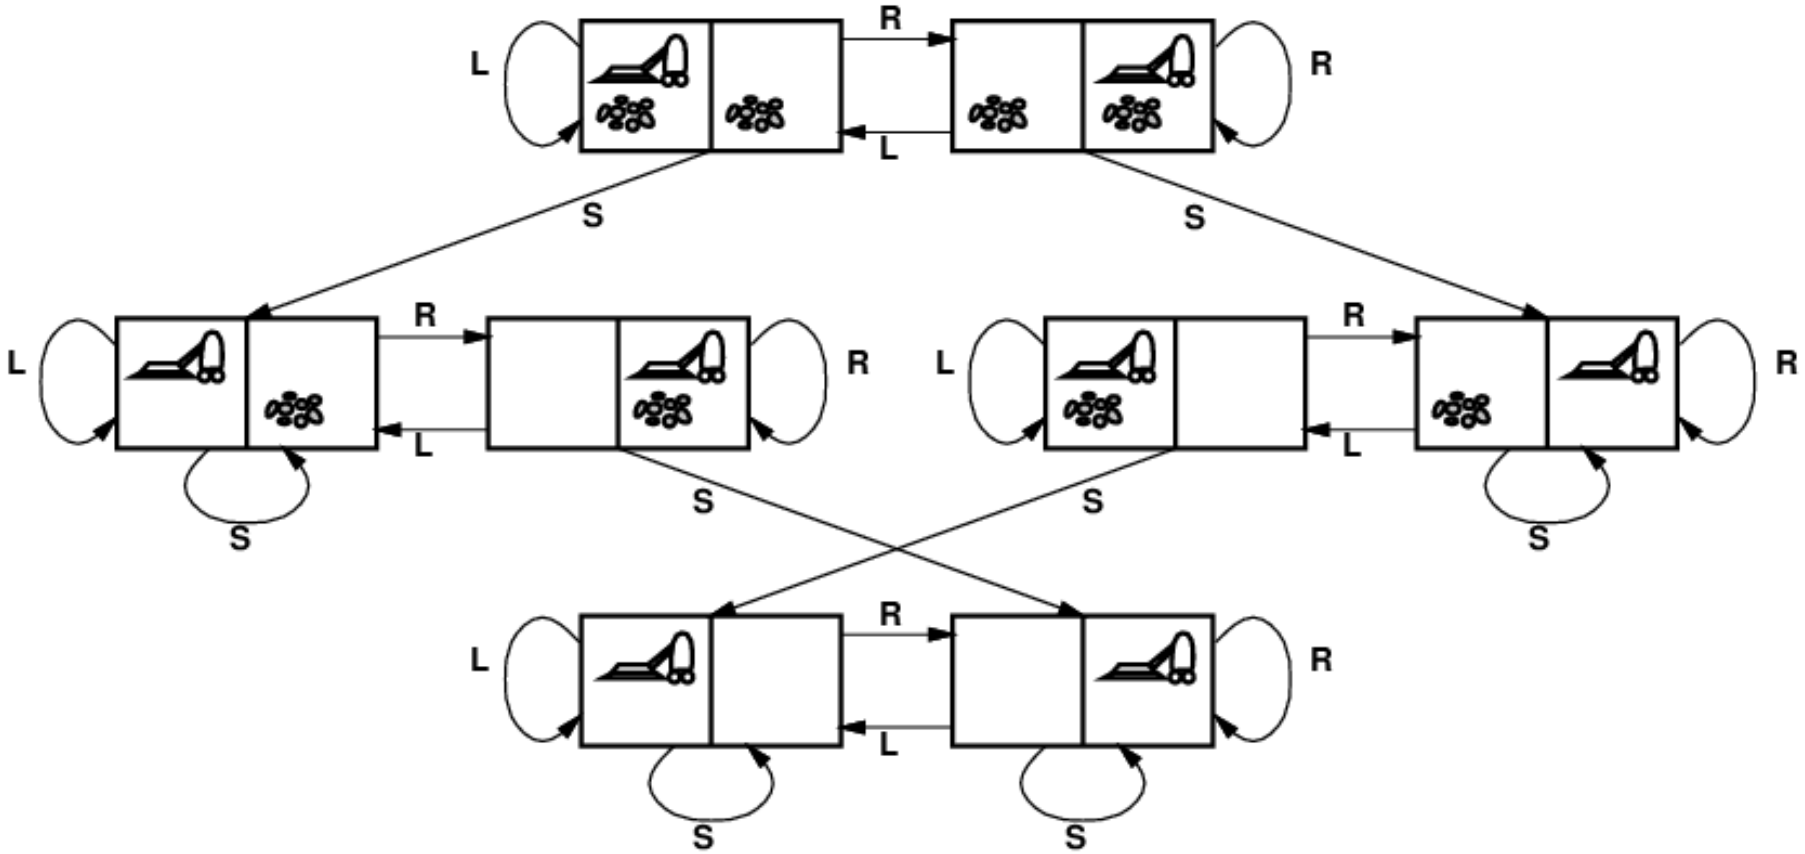

states??: integer dirt and robot locations (ignore dirt **amounts** etc.)

How many states?

Example: Vacuum World State Space Graph

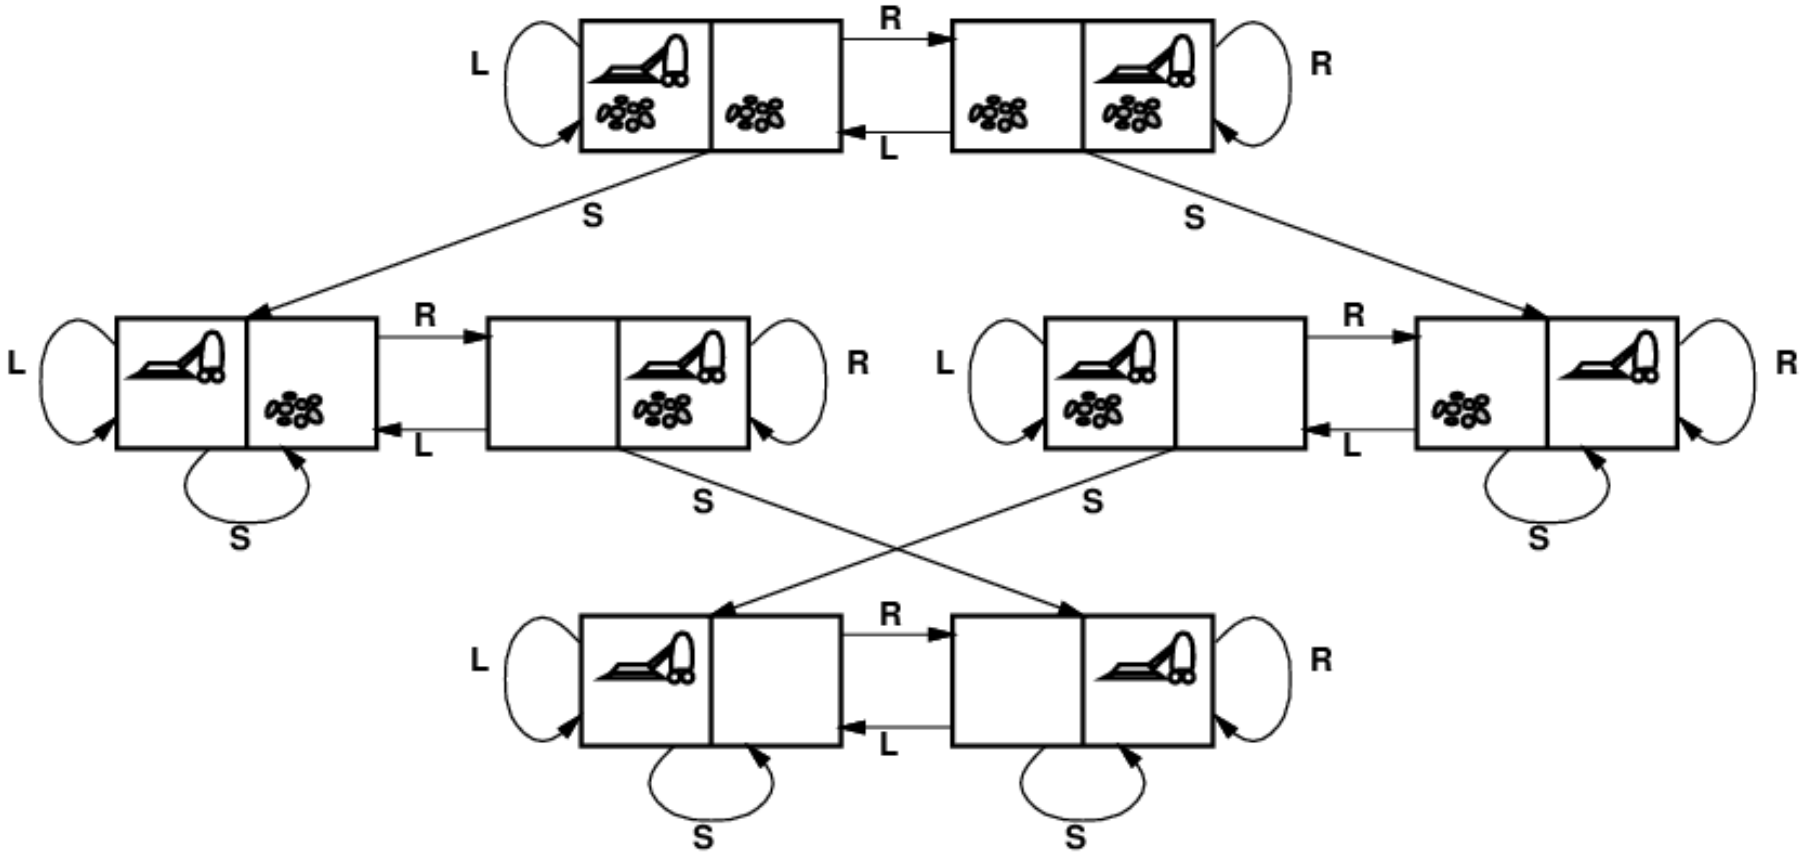

states??: integer dirt and robot locations (ignore dirt **amounts** etc.)

How many states?

actions??:

Example: Vacuum World State Space Graph

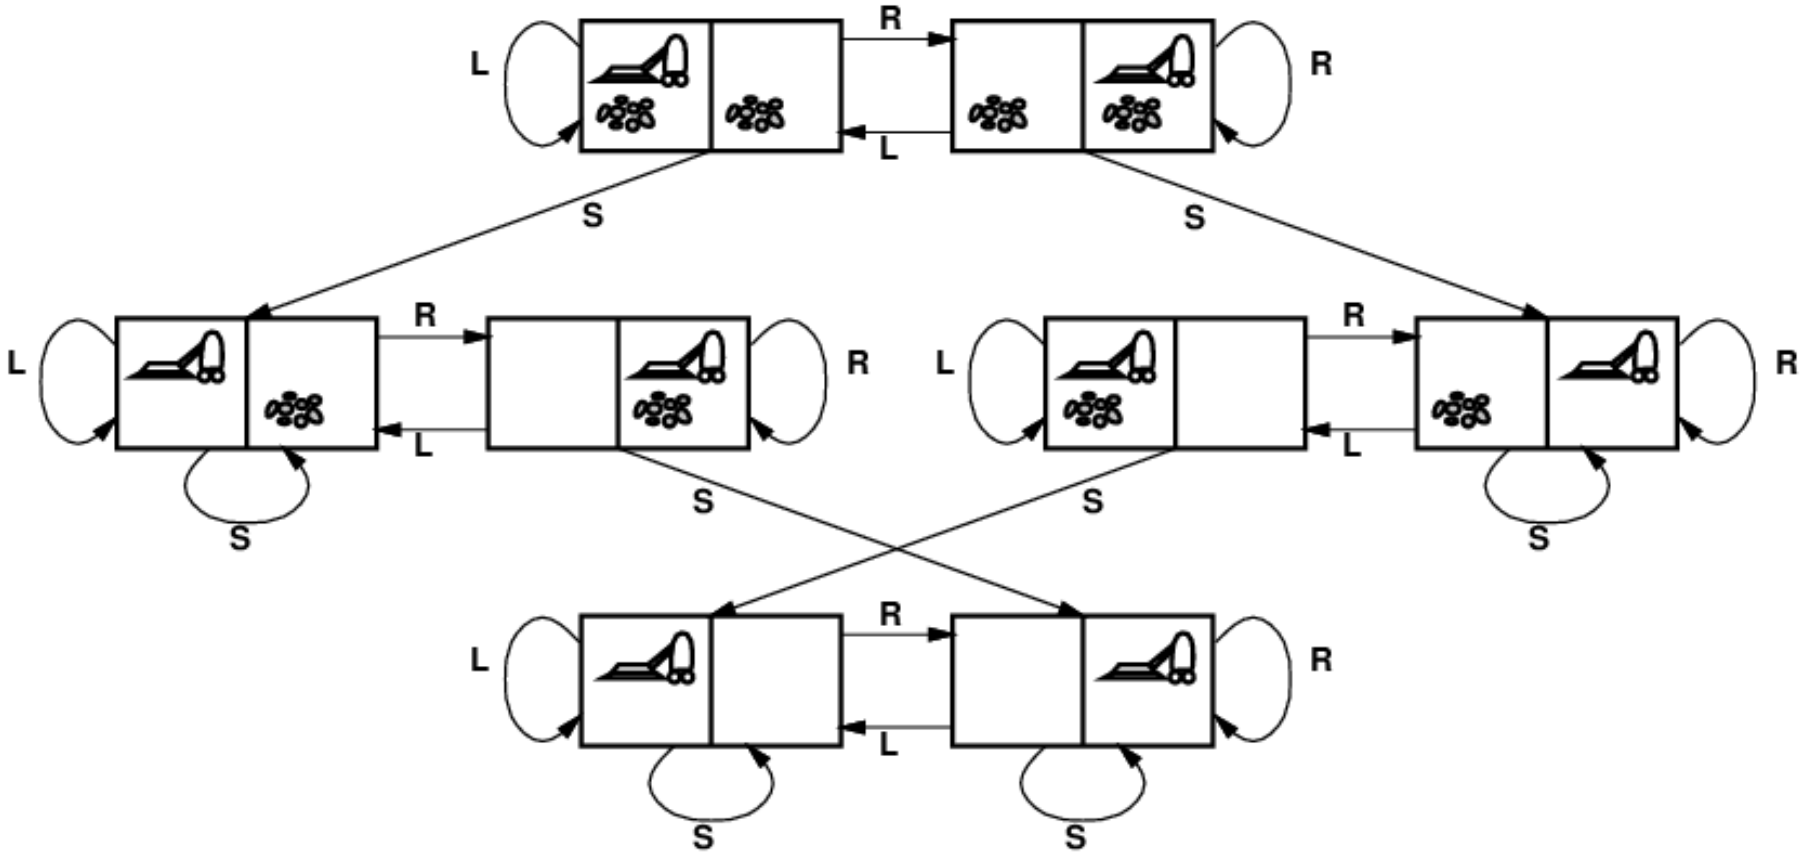

states??: integer dirt and robot locations (ignore dirt **amounts** etc.)

How many states?

actions??: *Left*, *Right*, *Suck*, *NoOp*

Example: Vacuum World State Space Graph

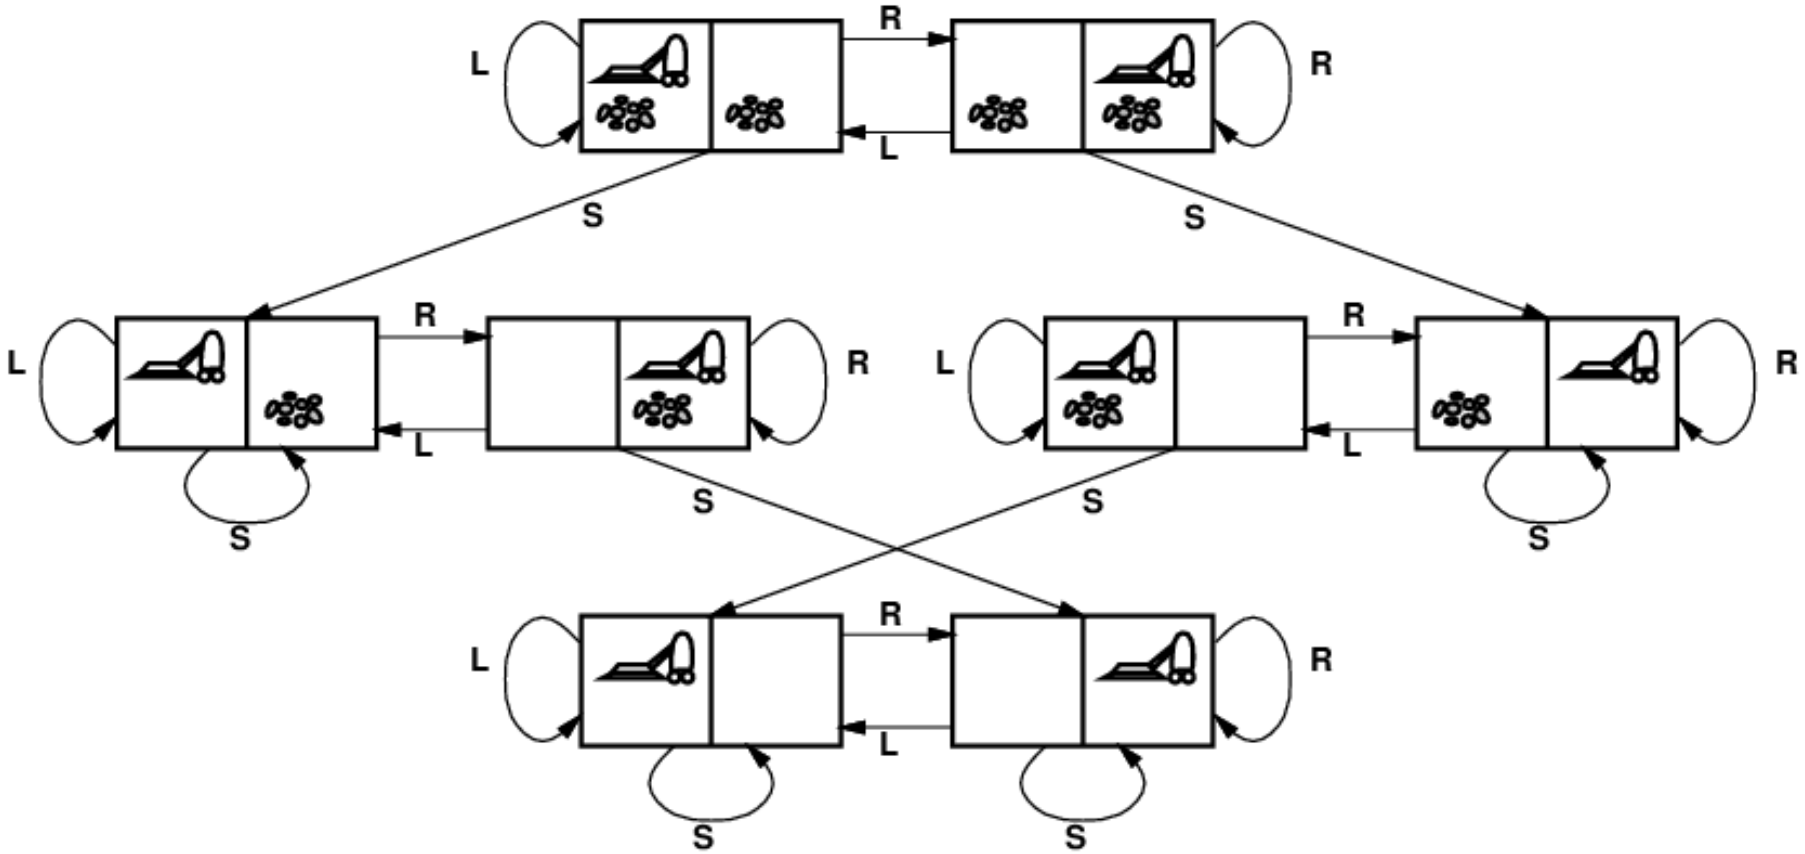

states??: integer dirt and robot locations (ignore dirt **amounts** etc.)

How many states?

actions??: *Left*, *Right*, *Suck*, *NoOp*

transition model??:

Example: Vacuum World State Space Graph

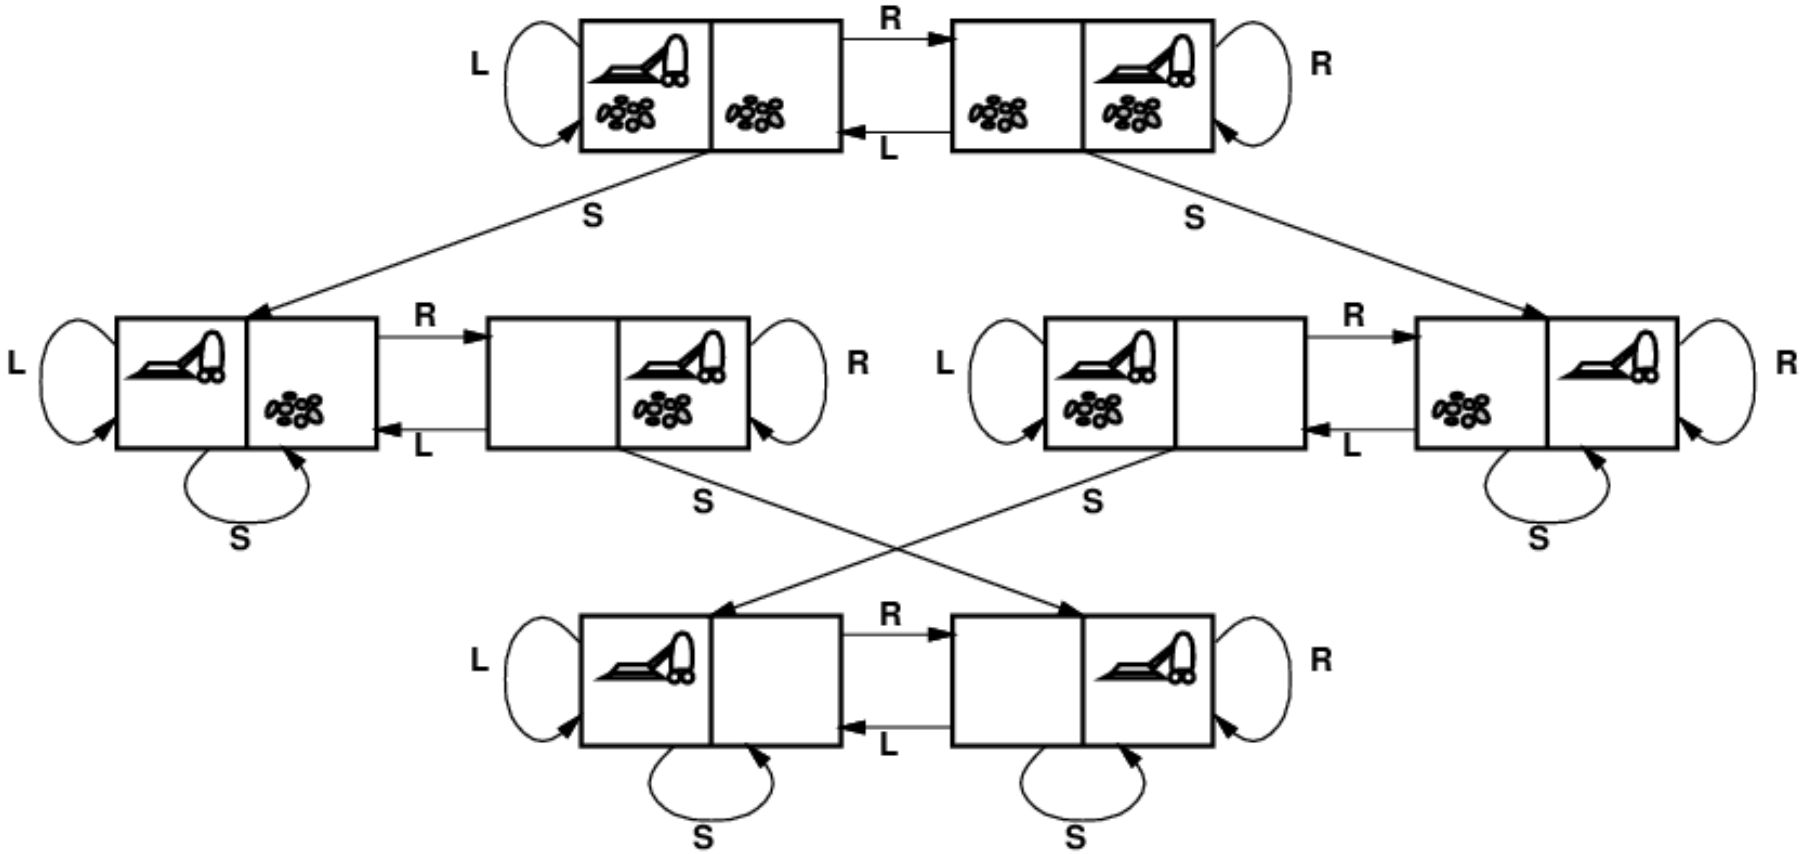

states??: integer dirt and robot locations (ignore dirt **amounts** etc.)

How many states?

actions??: *Left*, *Right*, *Suck*, *NoOp*

transition model??: ([A, dirt], *Suck*) $\rightarrow$ [A, clean], ...

Example: Vacuum World State Space Graph

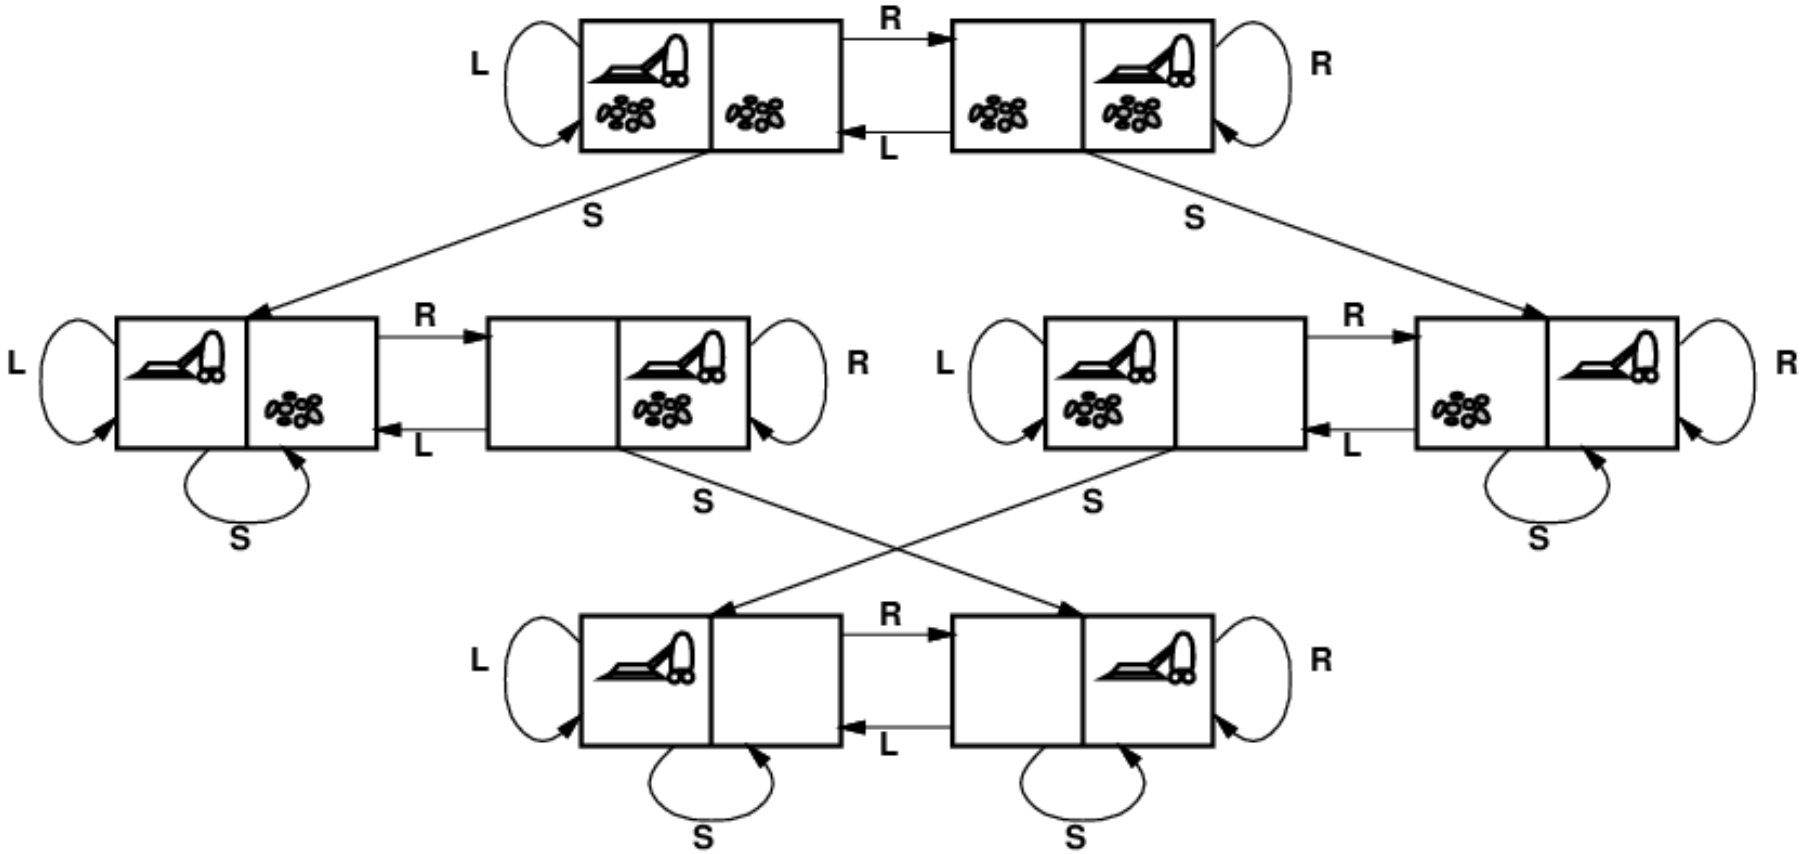

states??: integer dirt and robot locations (ignore dirt **amounts** etc.) How many states?

actions??: *Left*, *Right*, *Suck*, *NoOp*

transition model??: ([A, dirt], *Suck*) → [A, clean], . . . where is transition model in graph?

Example: Vacuum World State Space Graph

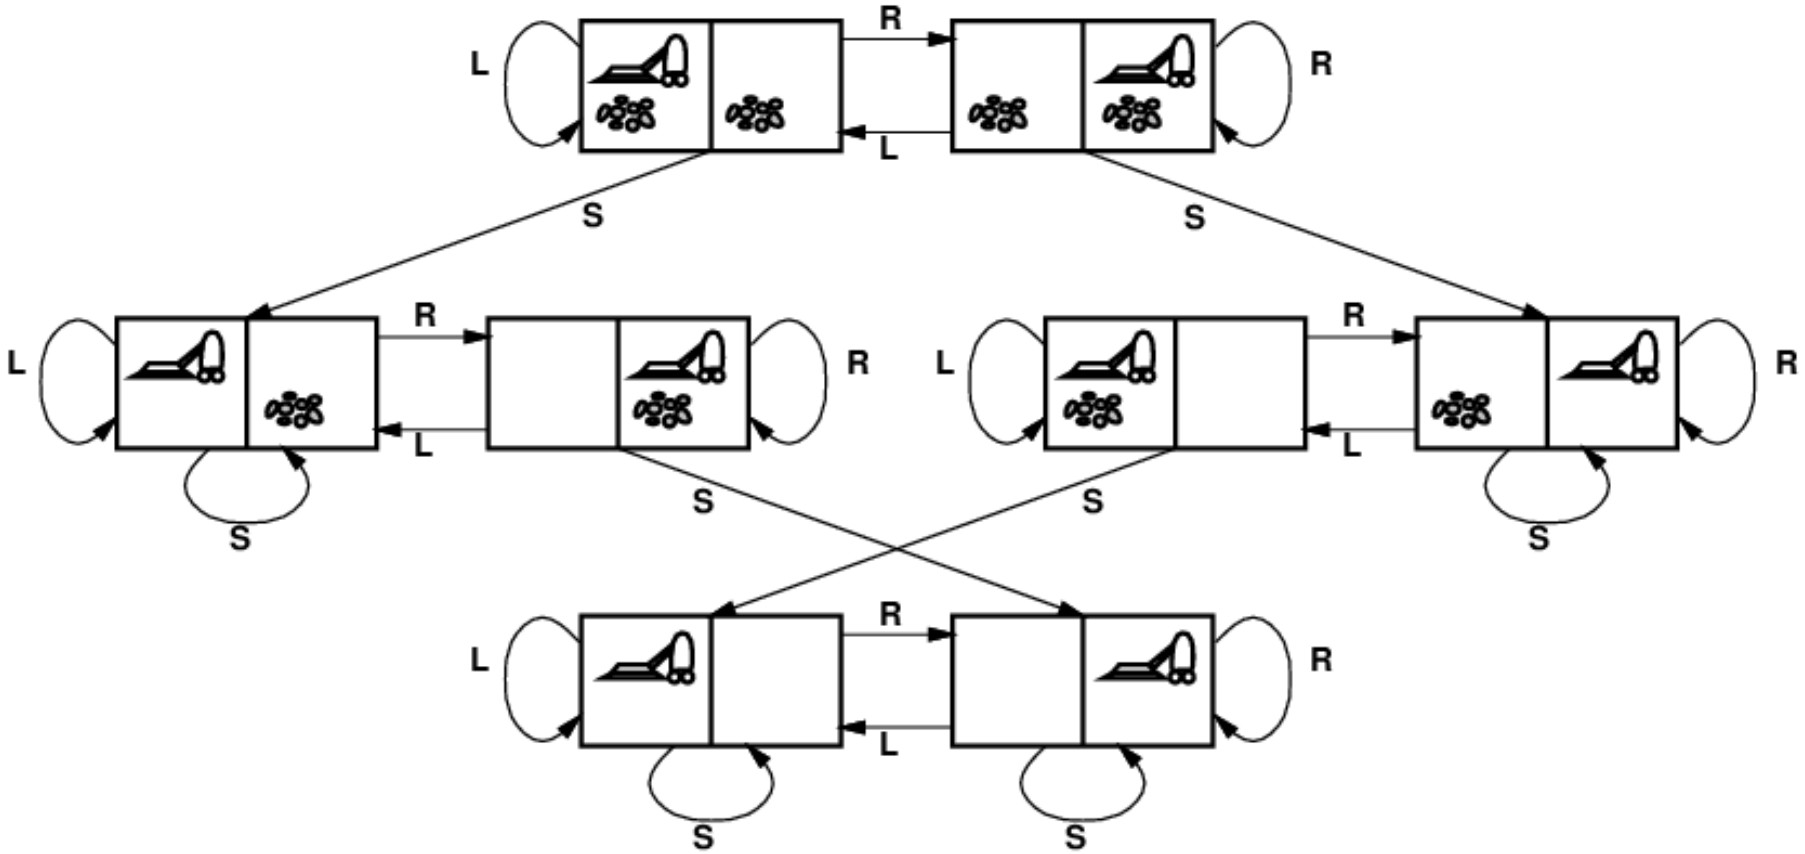

states??: integer dirt and robot locations (ignore dirt **amounts** etc.) How many states?

actions??: *Left*, *Right*, *Suck*, *NoOp*

transition model??: ([A, dirt], *Suck*) $\rightarrow$ [A, clean], ... where is transition model in graph?

goal test??:

Example: Vacuum World State Space Graph

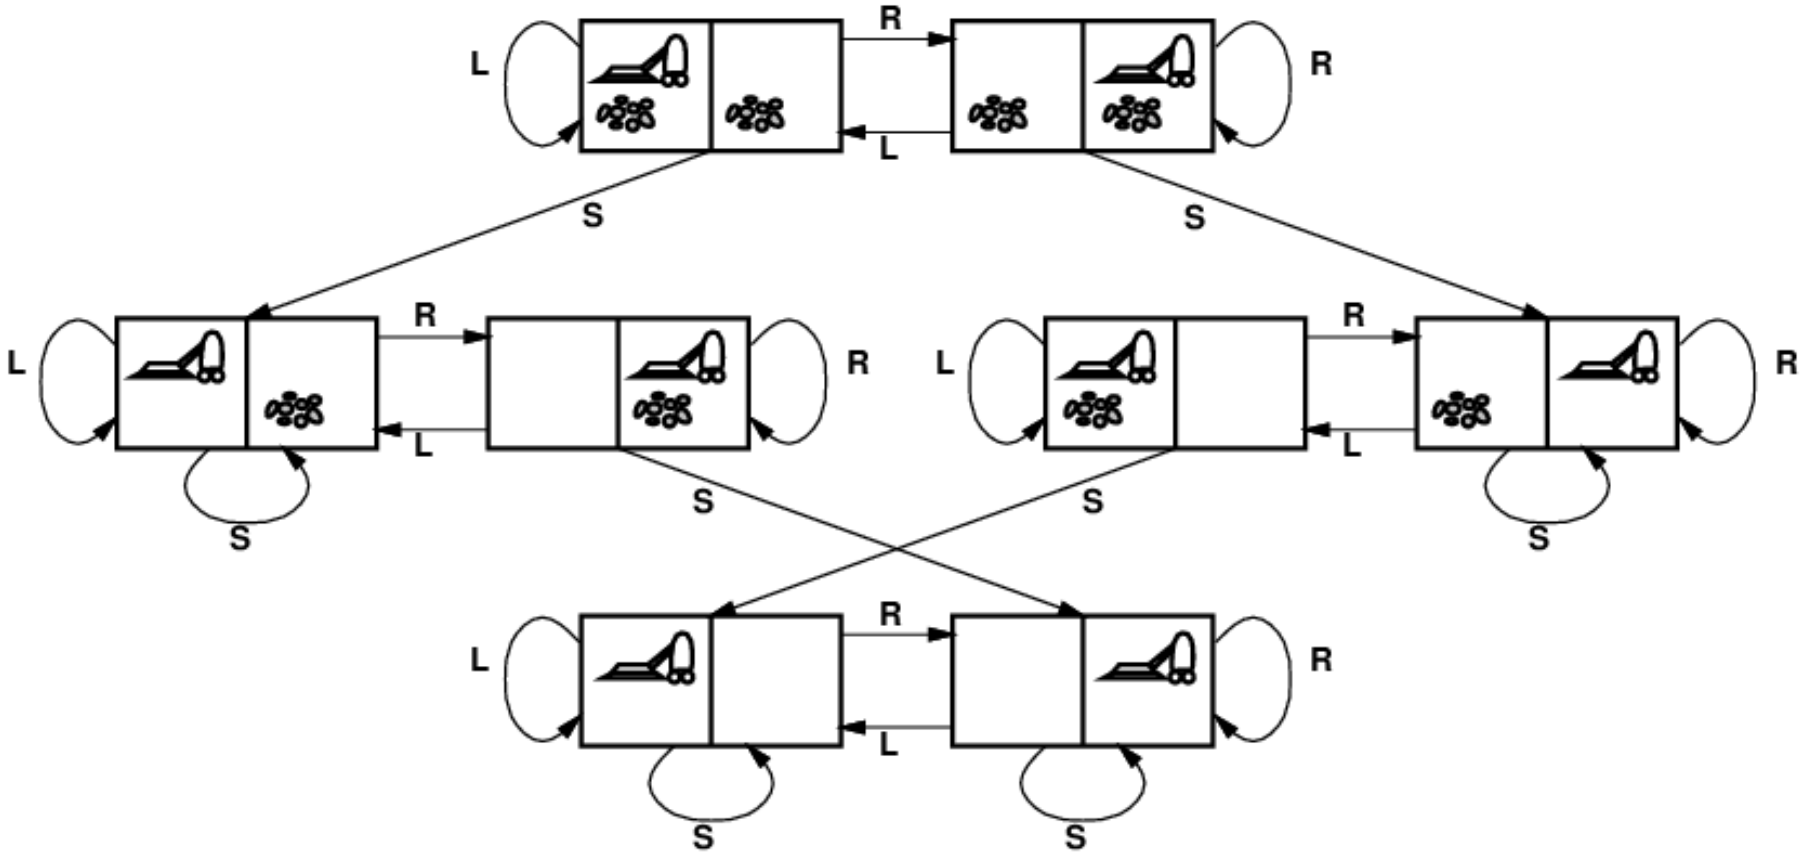

states??: integer dirt and robot locations (ignore dirt **amounts** etc.) How many states?

actions??: *Left*, *Right*, *Suck*, *NoOp*

transition model??: ([A, dirt], *Suck*) $\rightarrow$ [A, clean], ... where is transition model in graph?

goal test??: no dirt

Example: Vacuum World State Space Graph

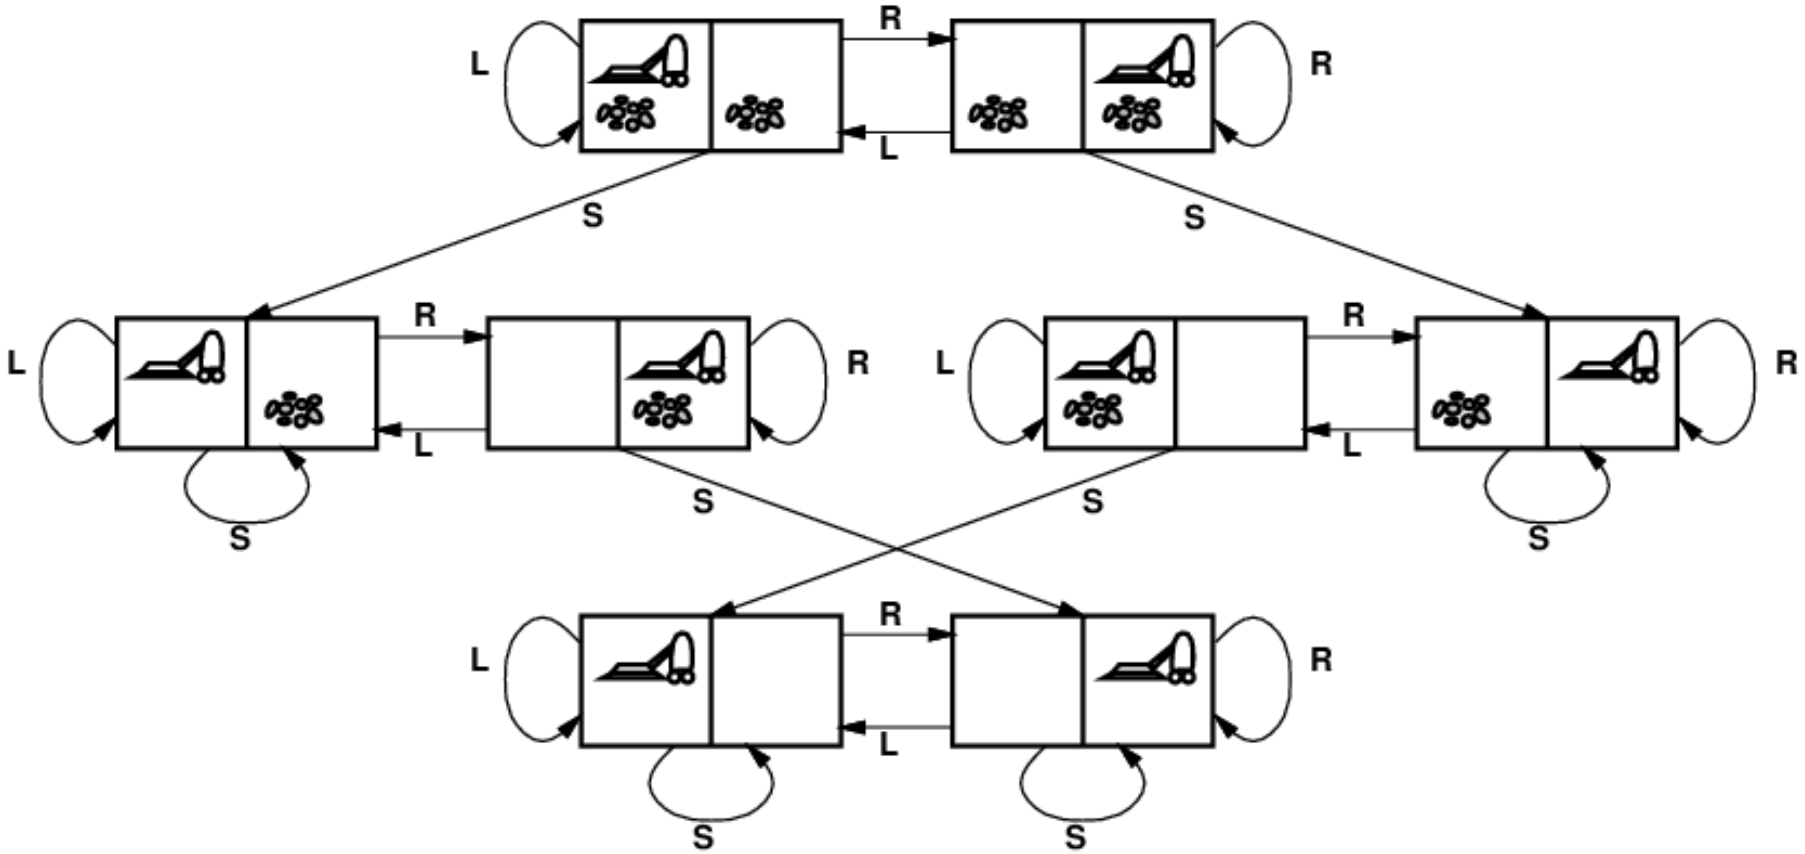

states??: integer dirt and robot locations (ignore dirt **amounts** etc.) How many states?

actions??: *Left*, *Right*, *Suck*, *NoOp*

transition model??: ([A, dirt], *Suck*) $\rightarrow$ [A, clean], ... where is transition model in graph?

goal test??: no dirt

path cost??:

Example: Vacuum World State Space Graph

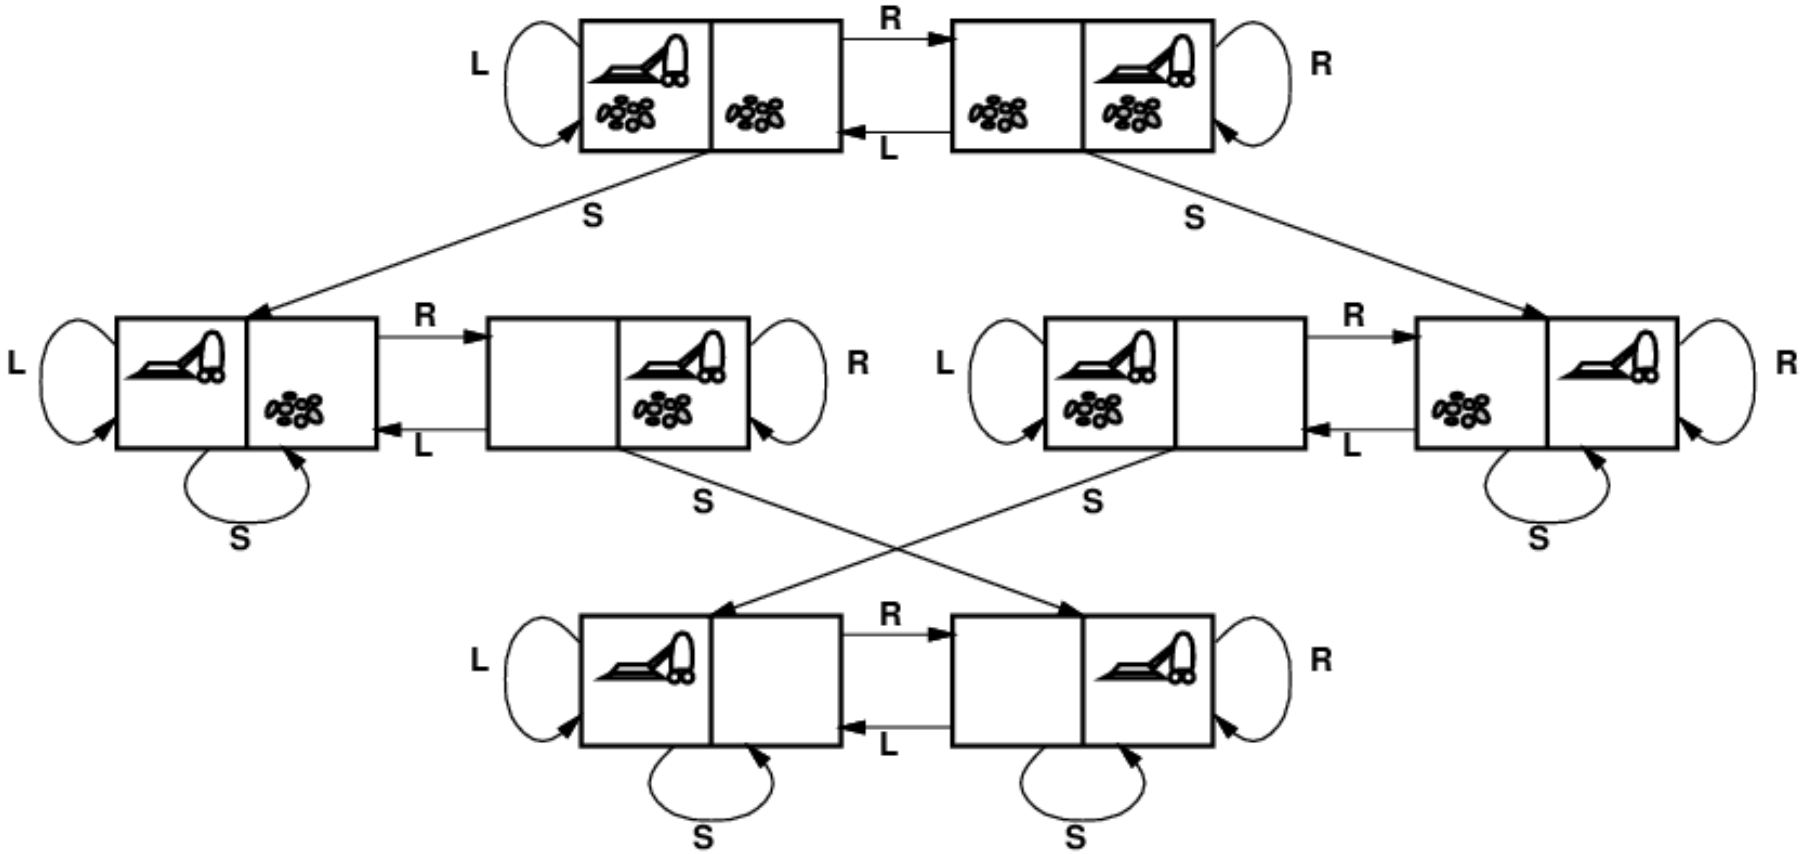

states??: integer dirt and robot locations (ignore dirt **amounts** etc.) How many states?

actions??: *Left*, *Right*, *Suck*, *NoOp*

transition model??: ([A, dirt], *Suck*) → [A, clean], . . . where is transition model in graph?

goal test??: no dirt

path cost??: 1 per action (0 for *NoOp*)

Example: Vacuum World State Space Graph

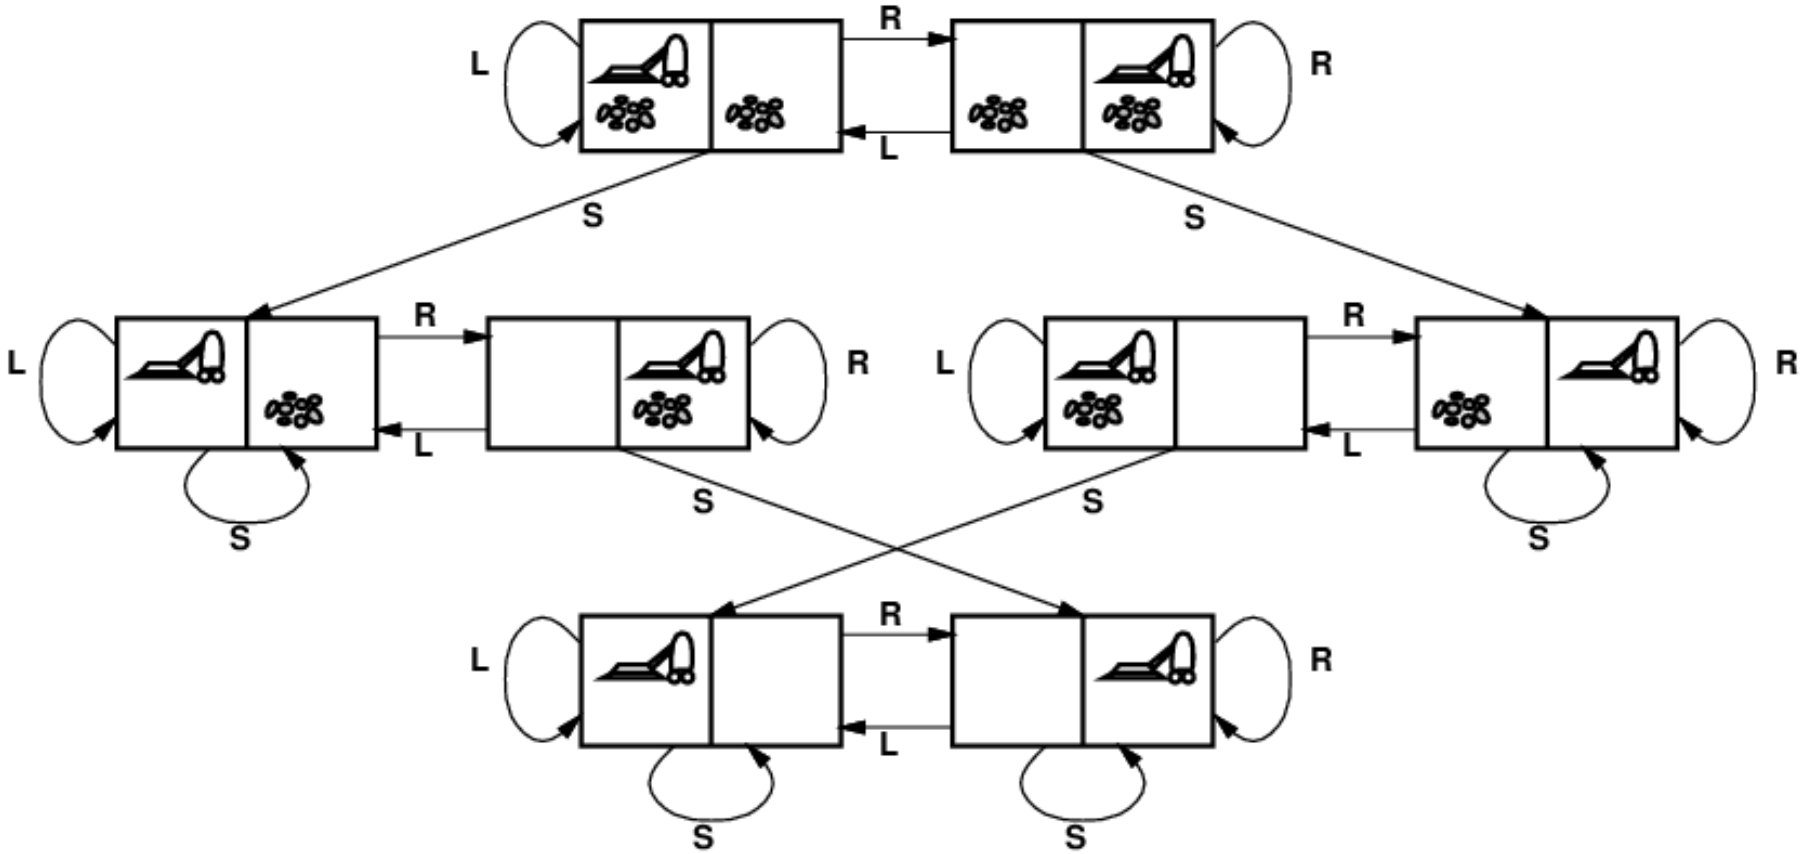

states??: integer dirt and robot locations (ignore dirt **amounts** etc.) How many states?

actions??: *Left*, *Right*, *Suck*, *NoOp*

transition model??: ([A, dirt], *Suck*) → [A, clean], . . . where is transition model in graph?

goal test??: no dirt

path cost??: 1 per action (0 for *NoOp*)

Example: The 8-puzzle

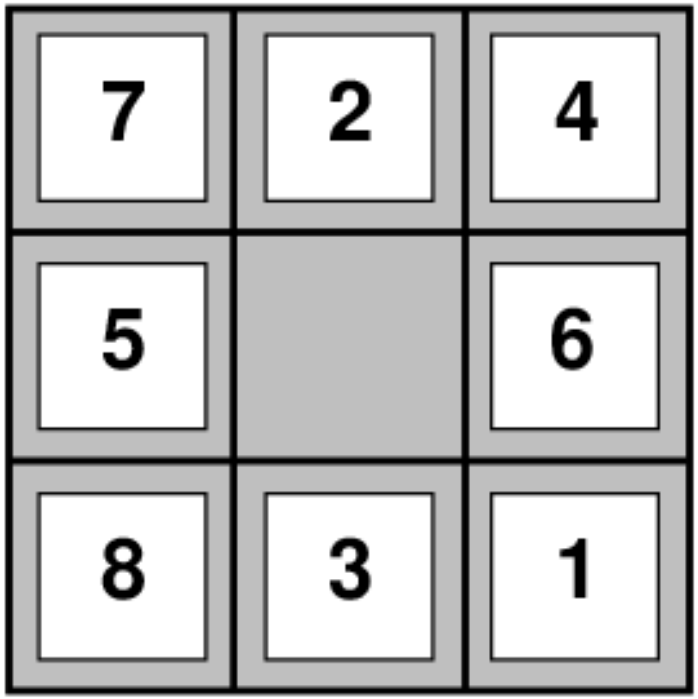

Start State

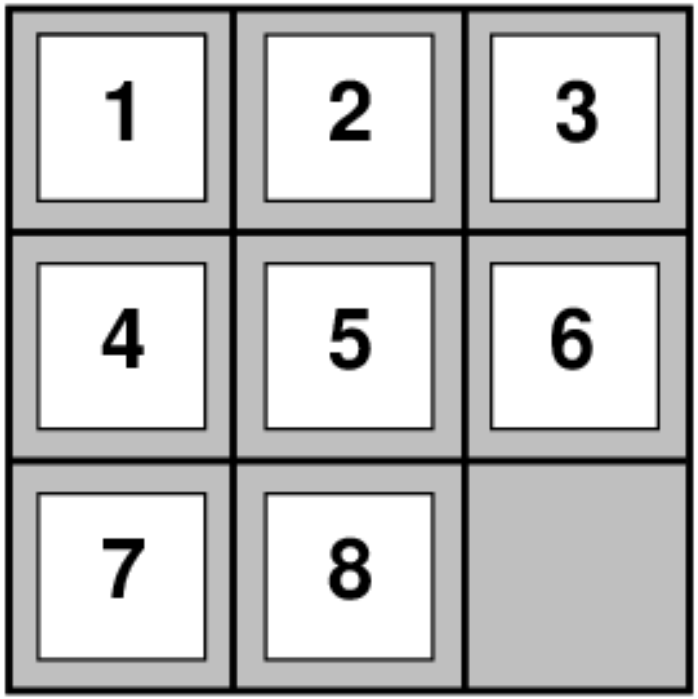

Goal State

states??:

Example: The 8-puzzle

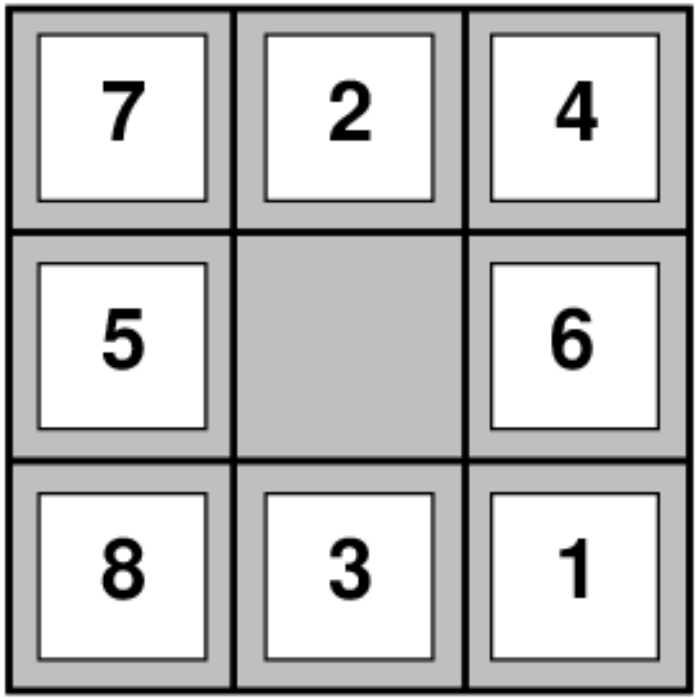

Start State

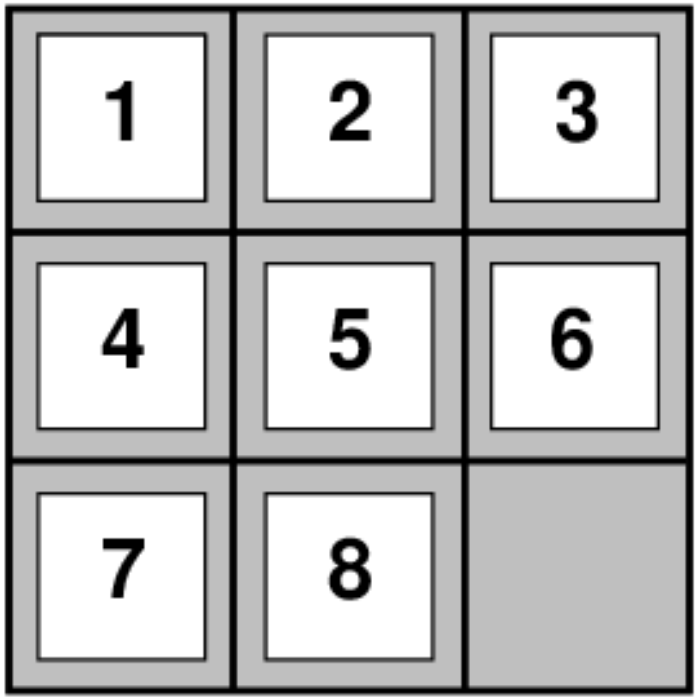

Goal State

states??: integer locations of tiles (ignore intermediate positions)

Example: The 8-puzzle

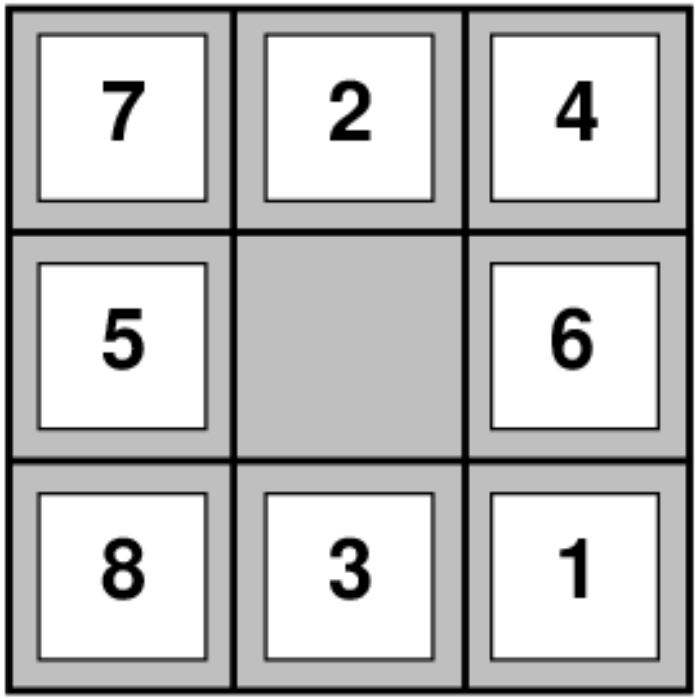

Start State

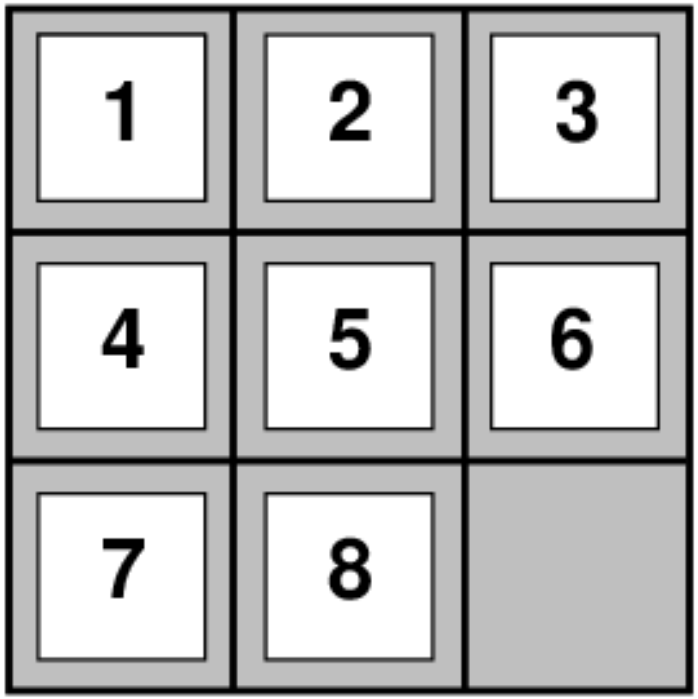

Goal State

states??: integer locations of tiles (ignore intermediate positions)

How many states?

Example: The 8-puzzle

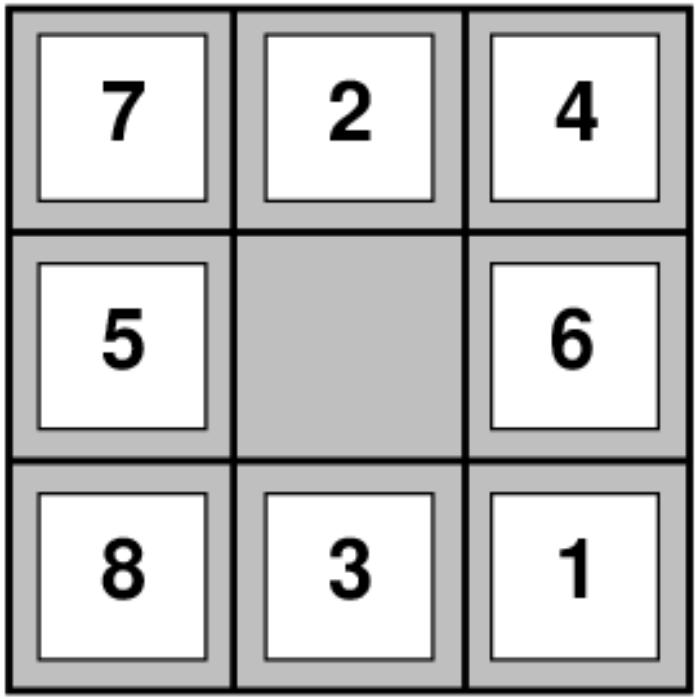

Start State

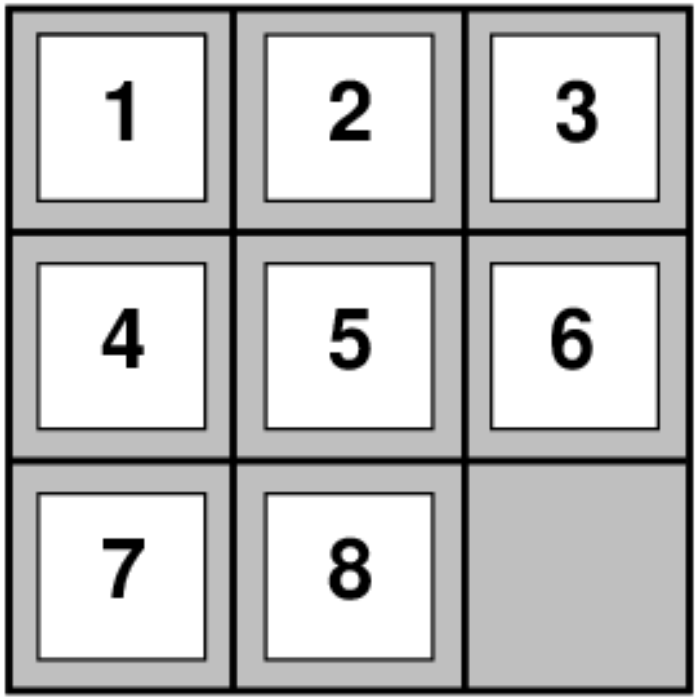

Goal State

states??: integer locations of tiles (ignore intermediate positions)

How many states?

actions??:

Example: The 8-puzzle

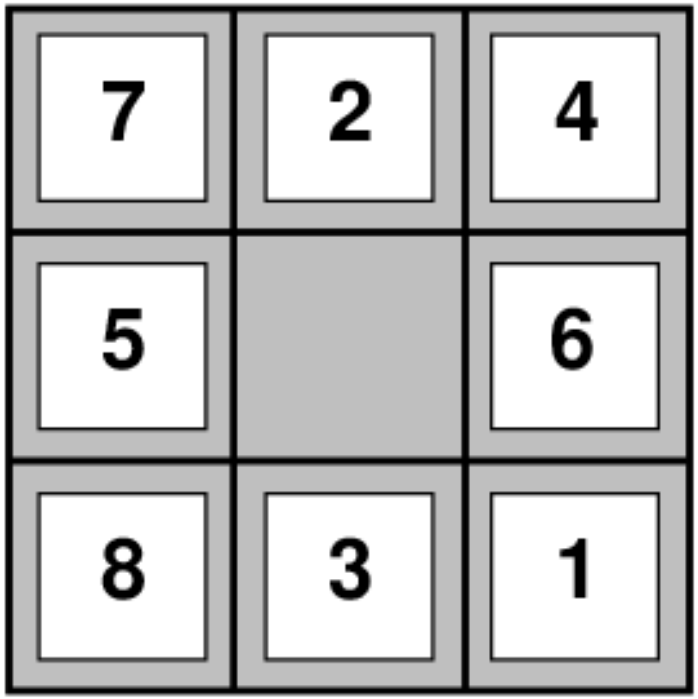

Start State

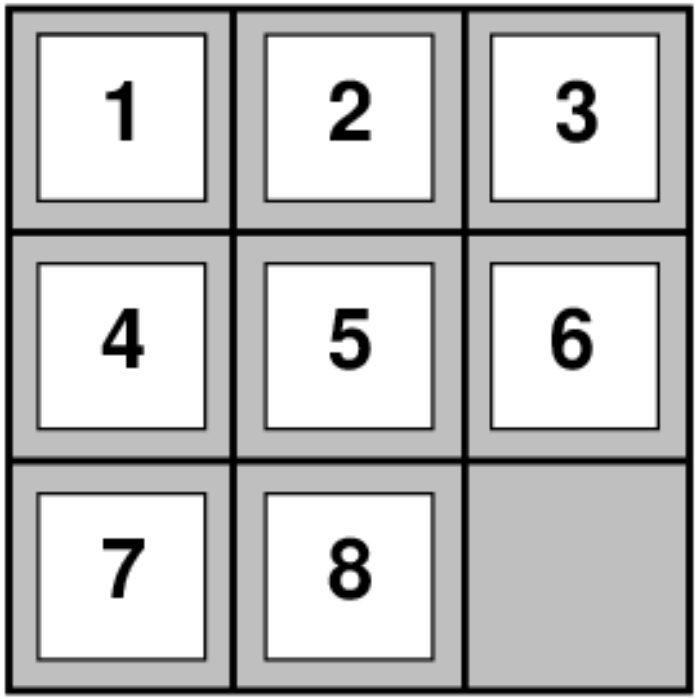

Goal State

states??: integer locations of tiles (ignore intermediate positions)

How many states?

actions??: blank space "moves" Left, Right, Up, Down

Example: The 8-puzzle

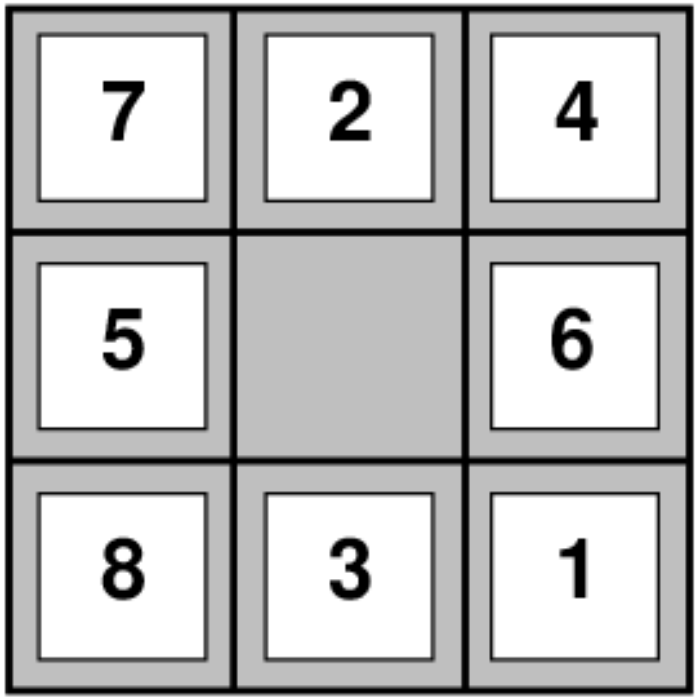

Start State

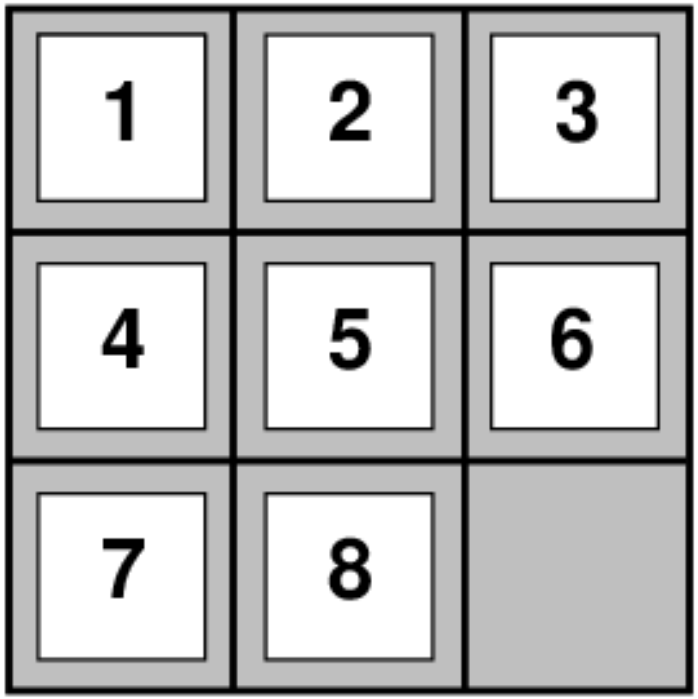

Goal State

states??: integer locations of tiles (ignore intermediate positions)

How many states?

actions??: blank space "moves" Left, Right, Up, Down

transition model??:

Example: The 8-puzzle

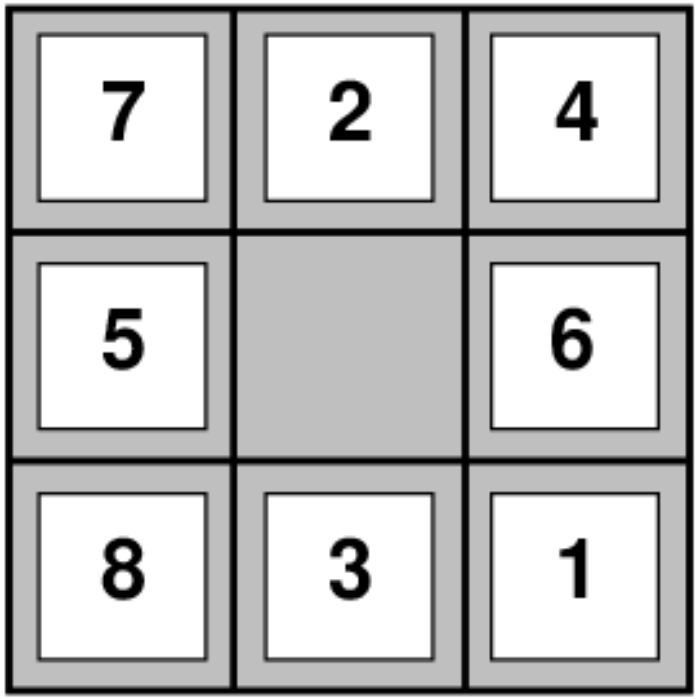

Start State

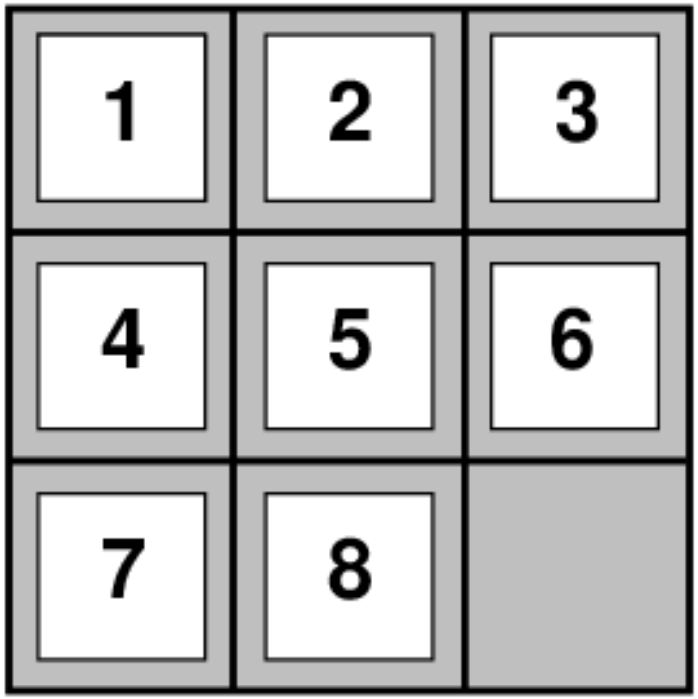

Goal State

states??: integer locations of tiles (ignore intermediate positions)

How many states?

actions??: blank space "moves" Left, Right, Up, Down

transition model??: Given state and action, returns resulting state

Example: The 8-puzzle

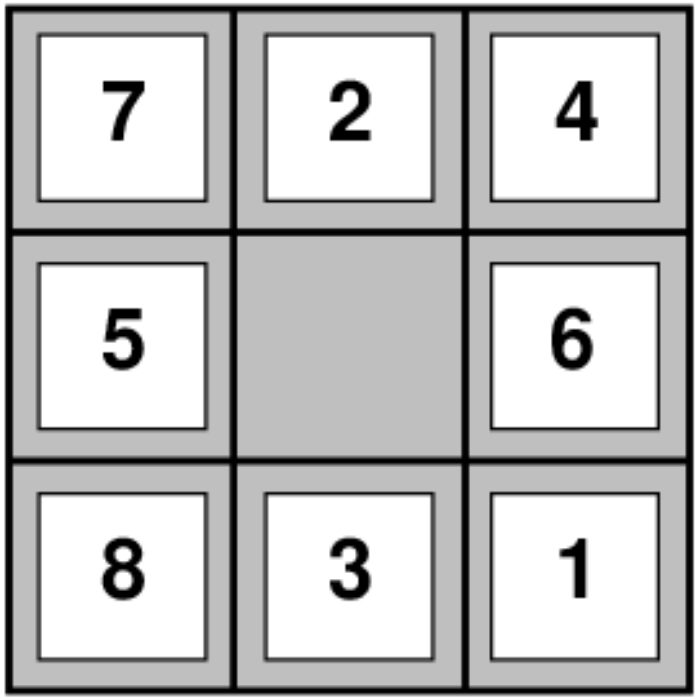

Start State

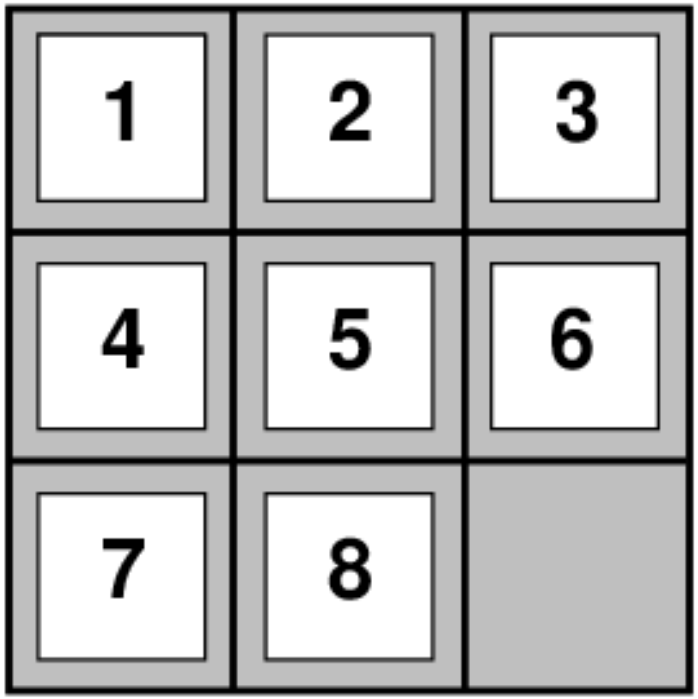

Goal State

states??: integer locations of tiles (ignore intermediate positions)

How many states?

actions??: blank space "moves" Left, Right, Up, Down

transition model??: Given state and action, returns resulting state

goal test??:

Example: The 8-puzzle

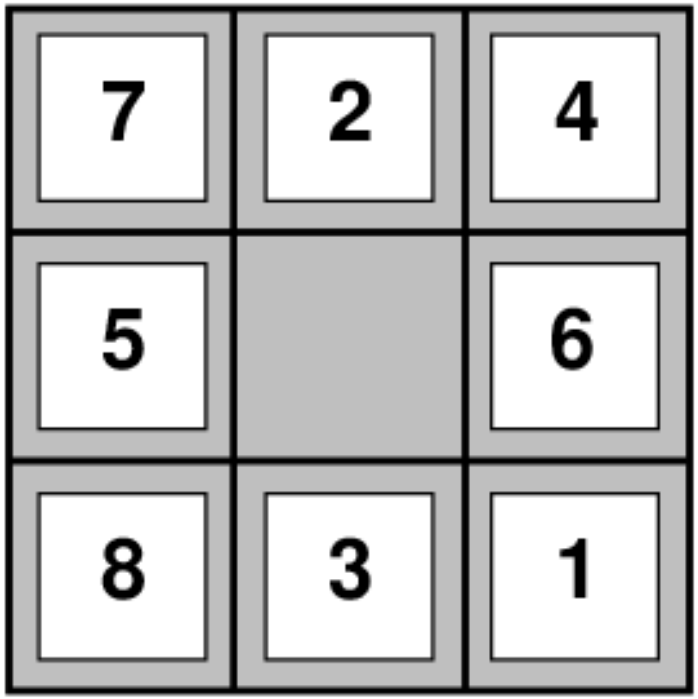

Start State

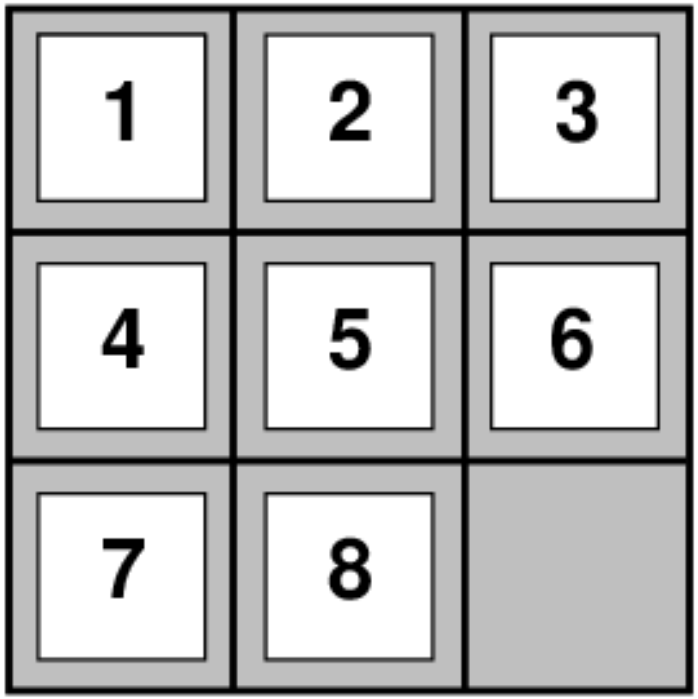

Goal State

states??: integer locations of tiles (ignore intermediate positions)

How many states?

actions??: blank space "moves" Left, Right, Up, Down

transition model??: Given state and action, returns resulting state

goal test??: = goal state (given)

Example: The 8-puzzle

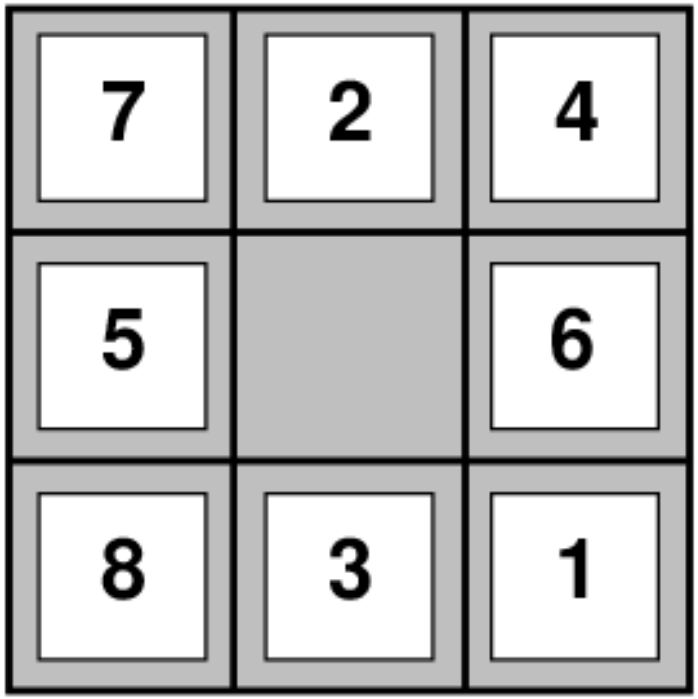

Start State

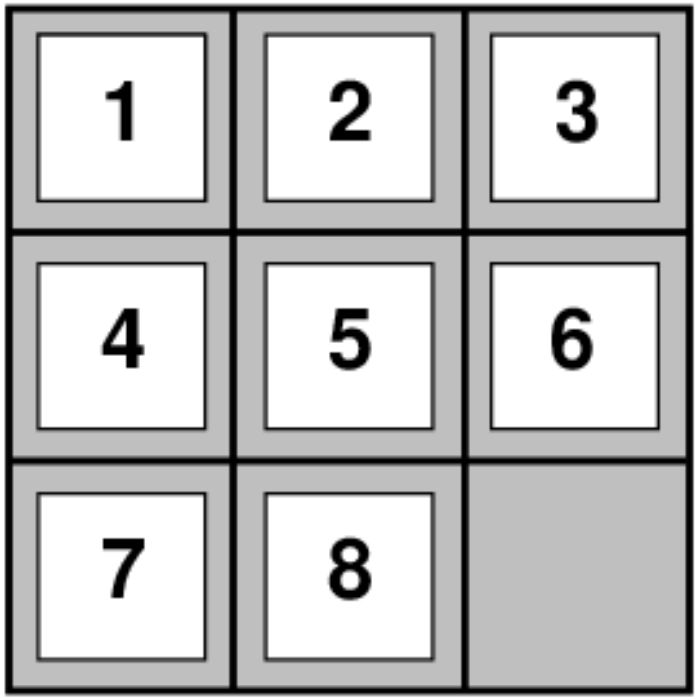

Goal State

states??: integer locations of tiles (ignore intermediate positions)

How many states?

actions??: blank space "moves" Left, Right, Up, Down

transition model??: Given state and action, returns resulting state

goal test??: = goal state (given)

path cost??:

Example: The 8-puzzle

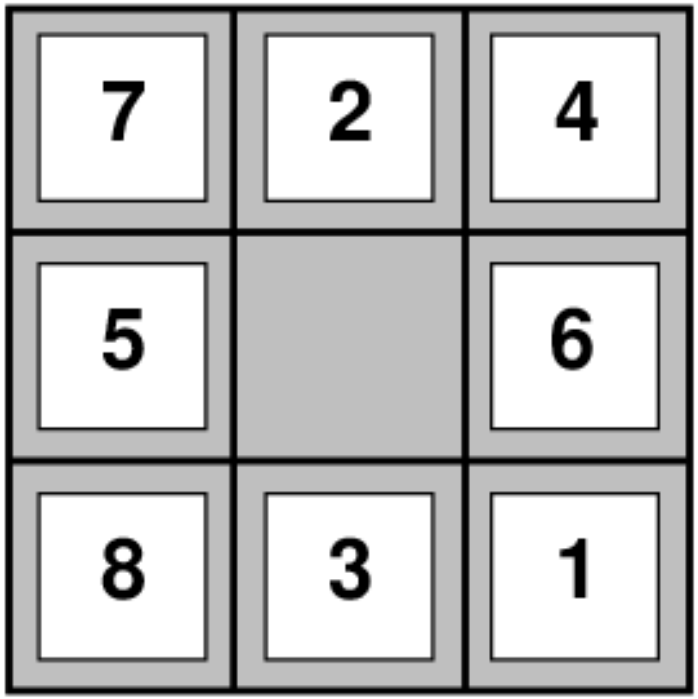

Start State

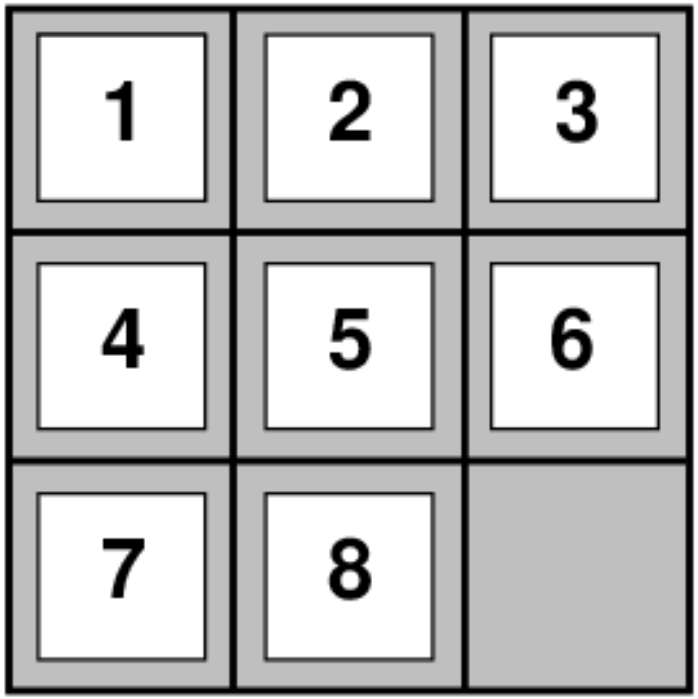

Goal State

states??: integer locations of tiles (ignore intermediate positions)

How many states?

actions??: blank space "moves" Left, Right, Up, Down

transition model??: Given state and action, returns resulting state

goal test??: = goal state (given)

path cost??: 1 per move

[Note: optimal solution of n-Puzzle family is NP-hard!]

Example: The 8-puzzle

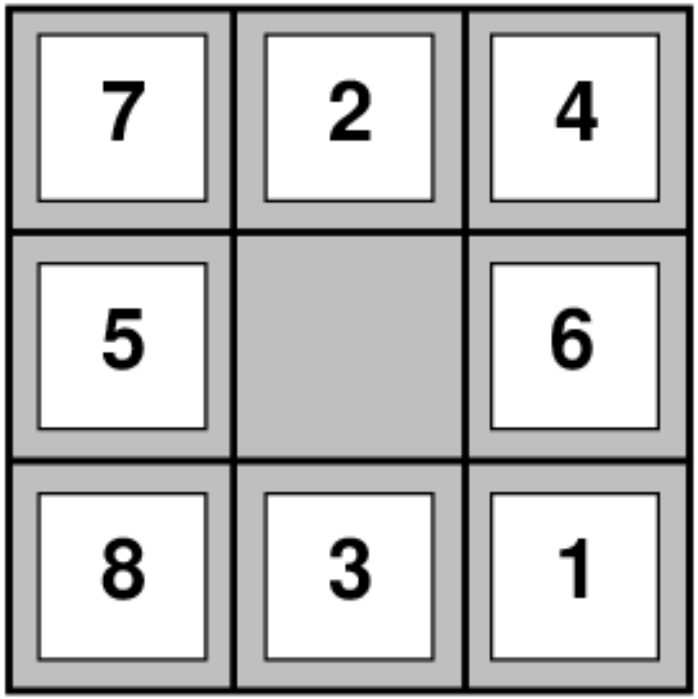

Start State

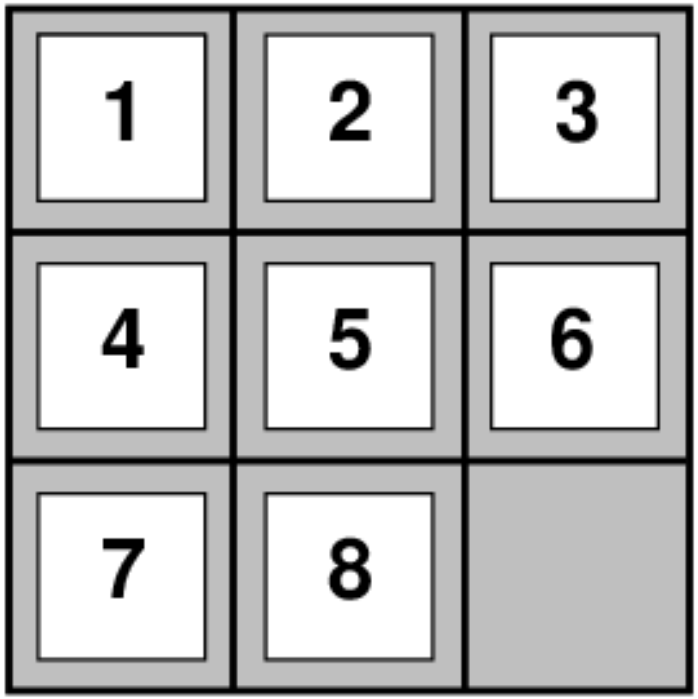

Goal State

states??: integer locations of tiles (ignore intermediate positions)

How many states?

actions??: blank space "moves" Left, Right, Up, Down

transition model??: Given state and action, returns resulting state

goal test??: = goal state (given)

path cost??: 1 per move

[Note: optimal solution of n-Puzzle family is NP-hard!]

Example: Robotic Assembly

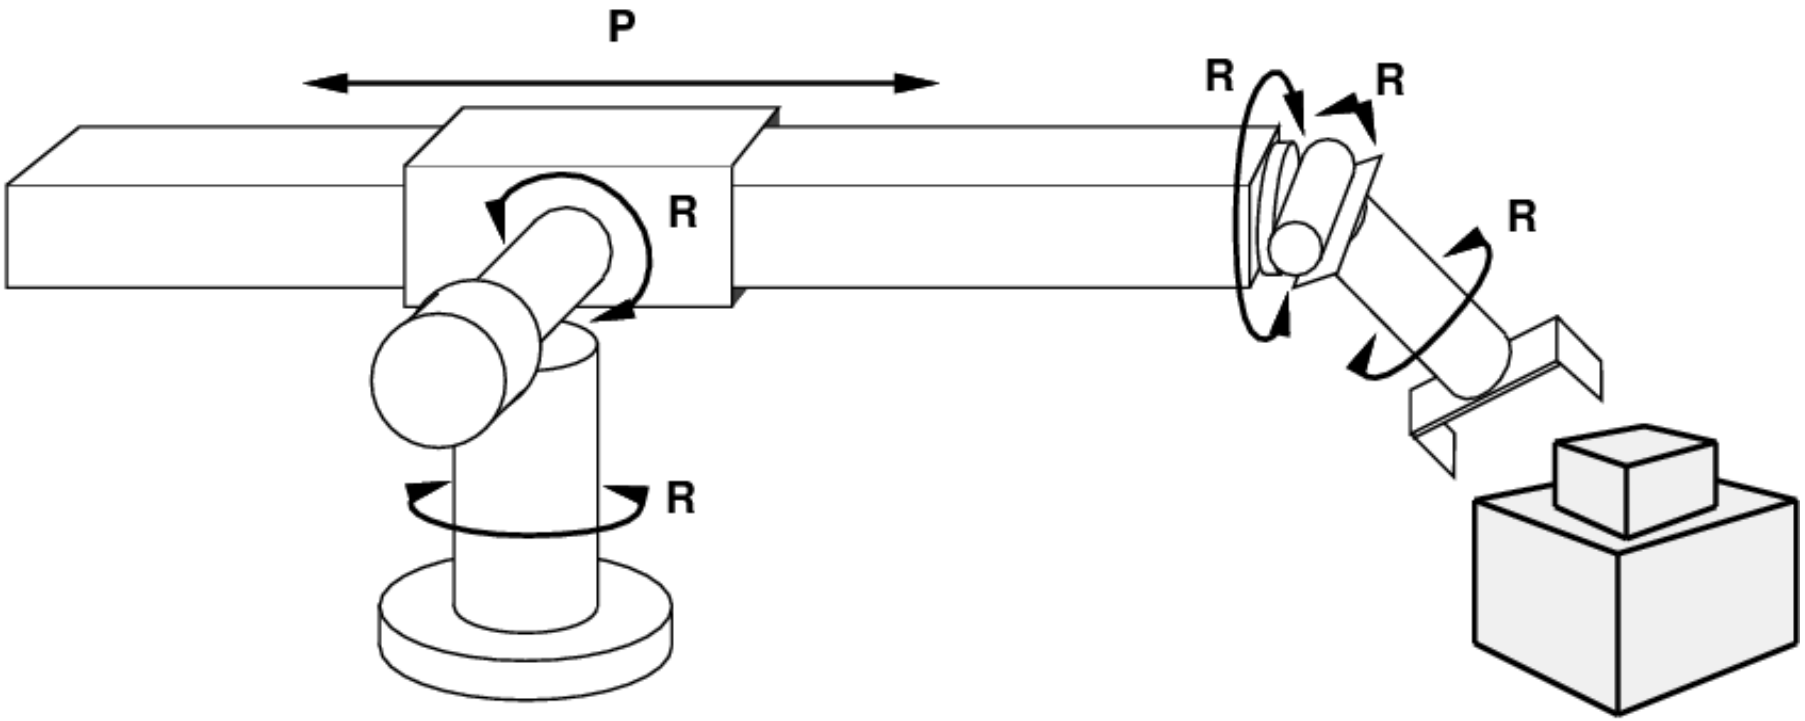

states??:

Example: Robotic Assembly

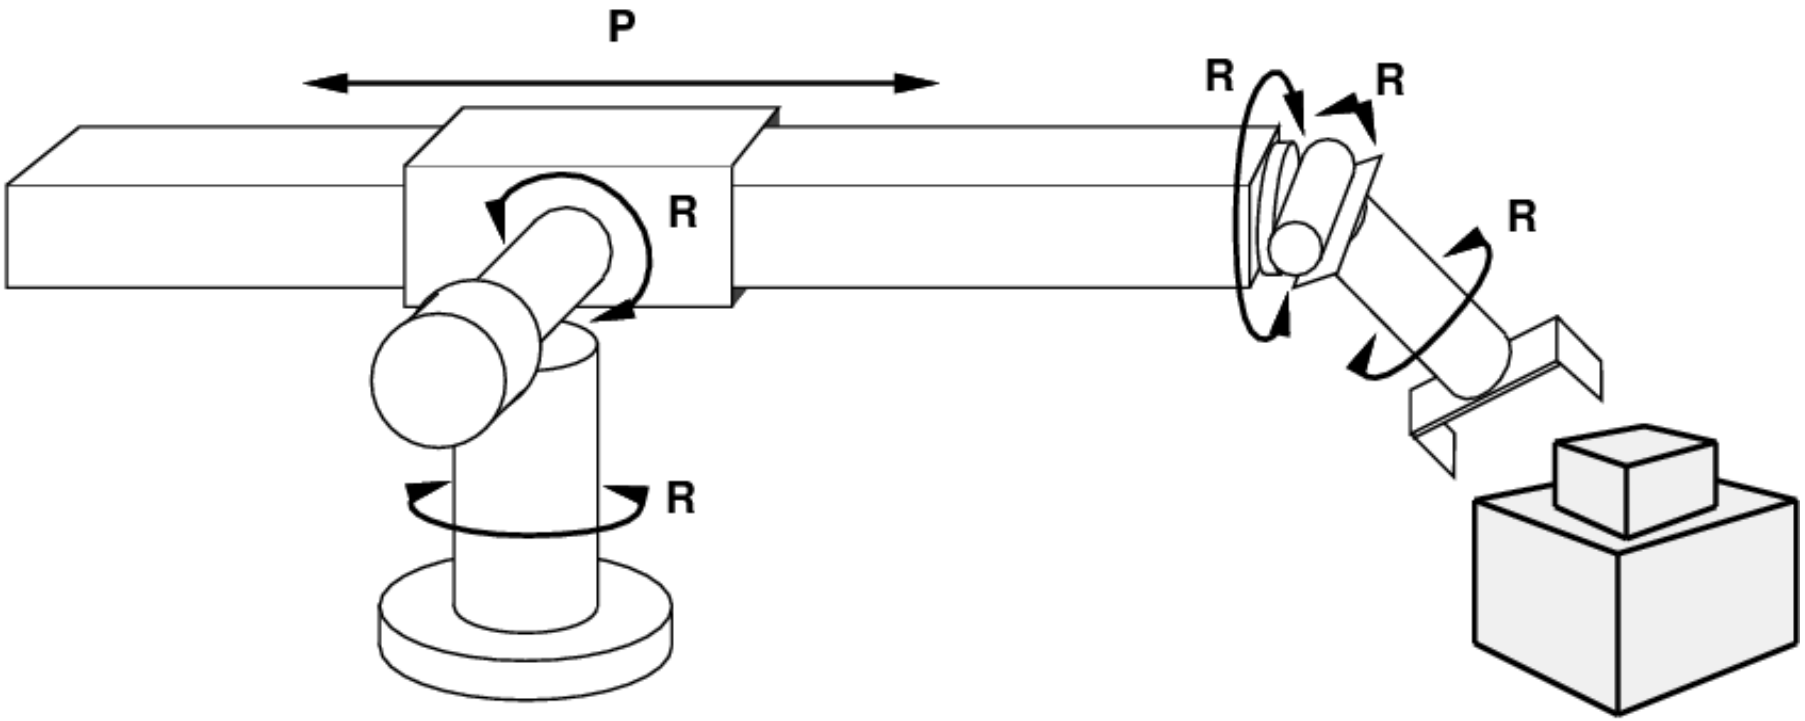

states??: real-valued coordinates of robot joint angles + parts of the object to be assembled

Example: Robotic Assembly

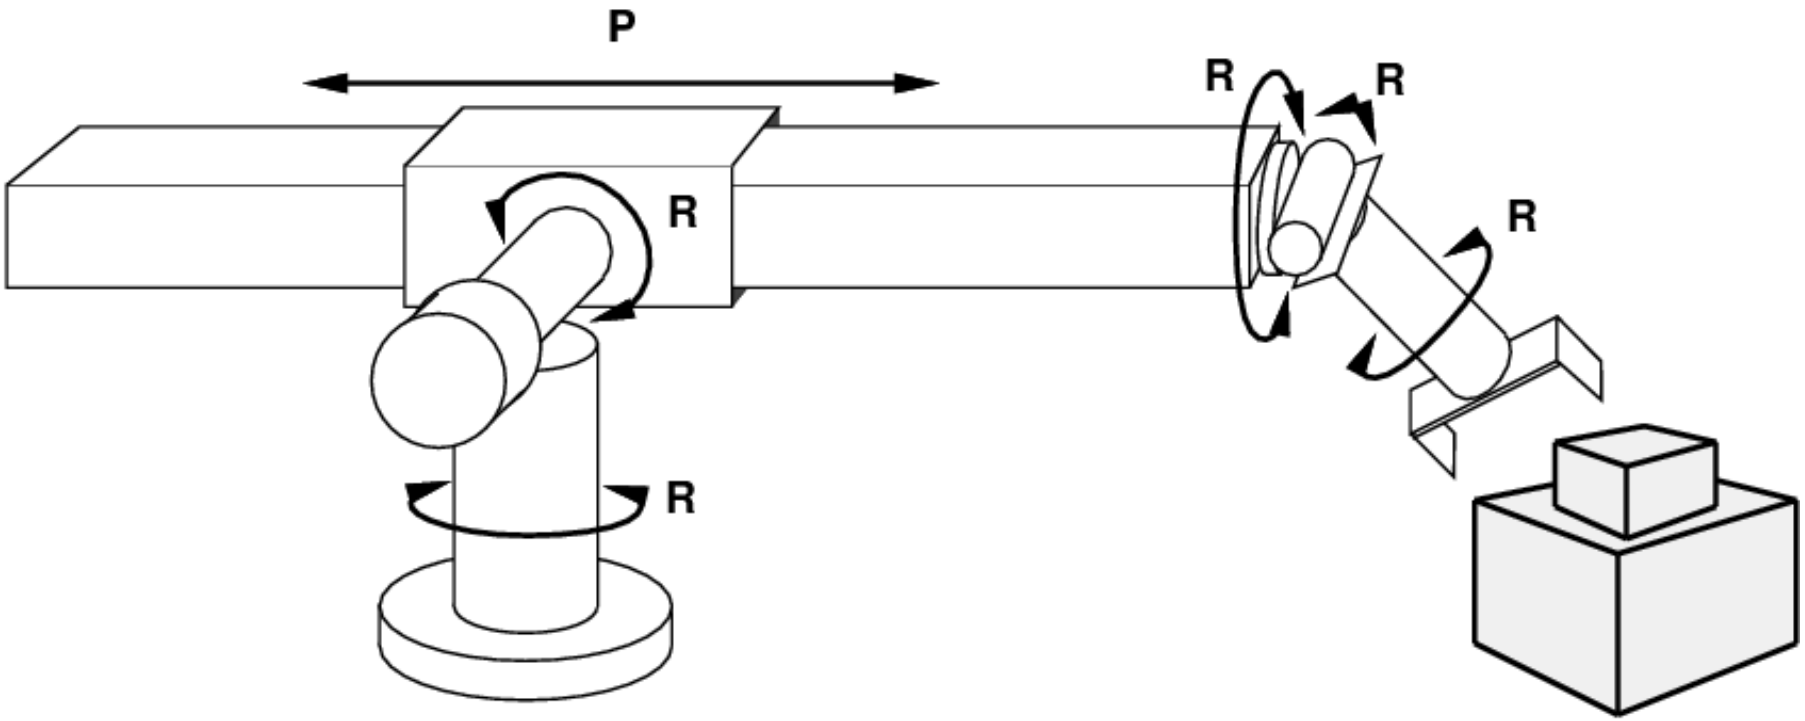

states??: real-valued coordinates of robot joint angles + parts of the object to be assembled

actions??:

Example: Robotic Assembly

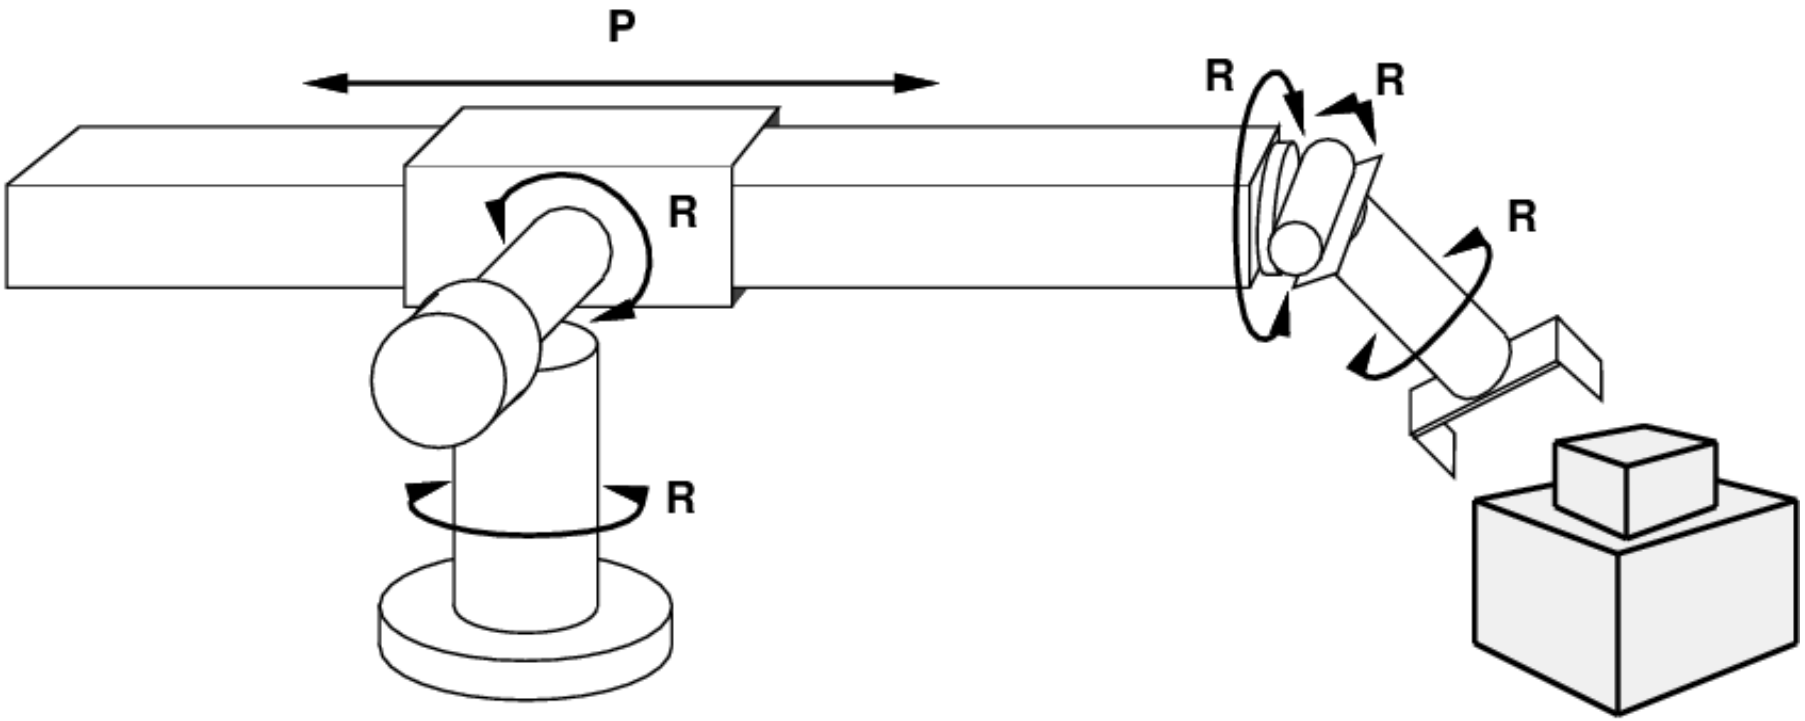

states??: real-valued coordinates of robot joint angles + parts of the object to be assembled

actions??: continuous motions of robot joints

Example: Robotic Assembly

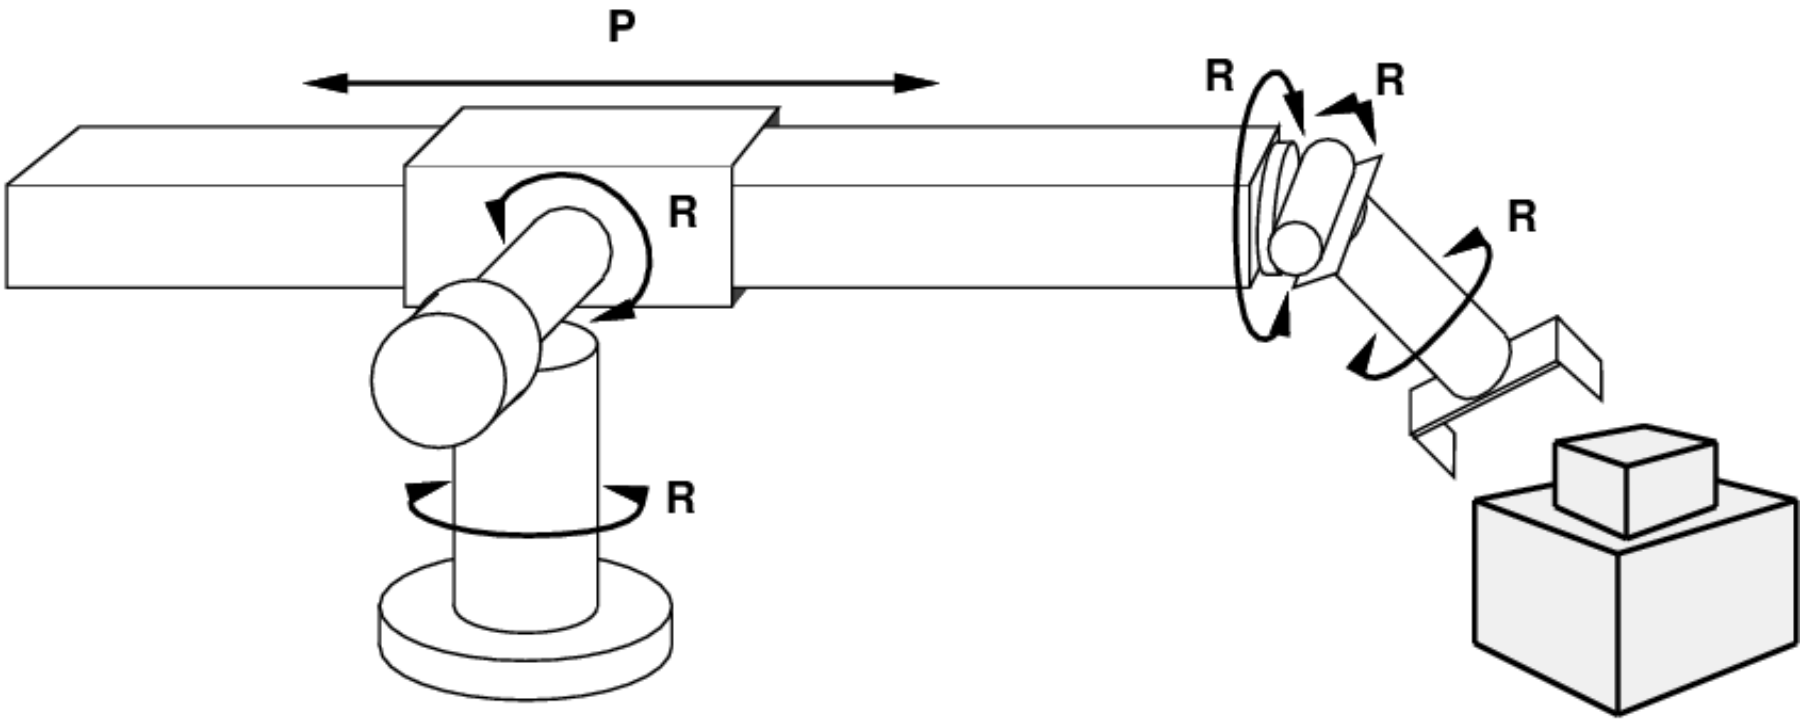

states??: real-valued coordinates of robot joint angles + parts of the object to be assembled

actions??: continuous motions of robot joints

transition model??:

Example: Robotic Assembly

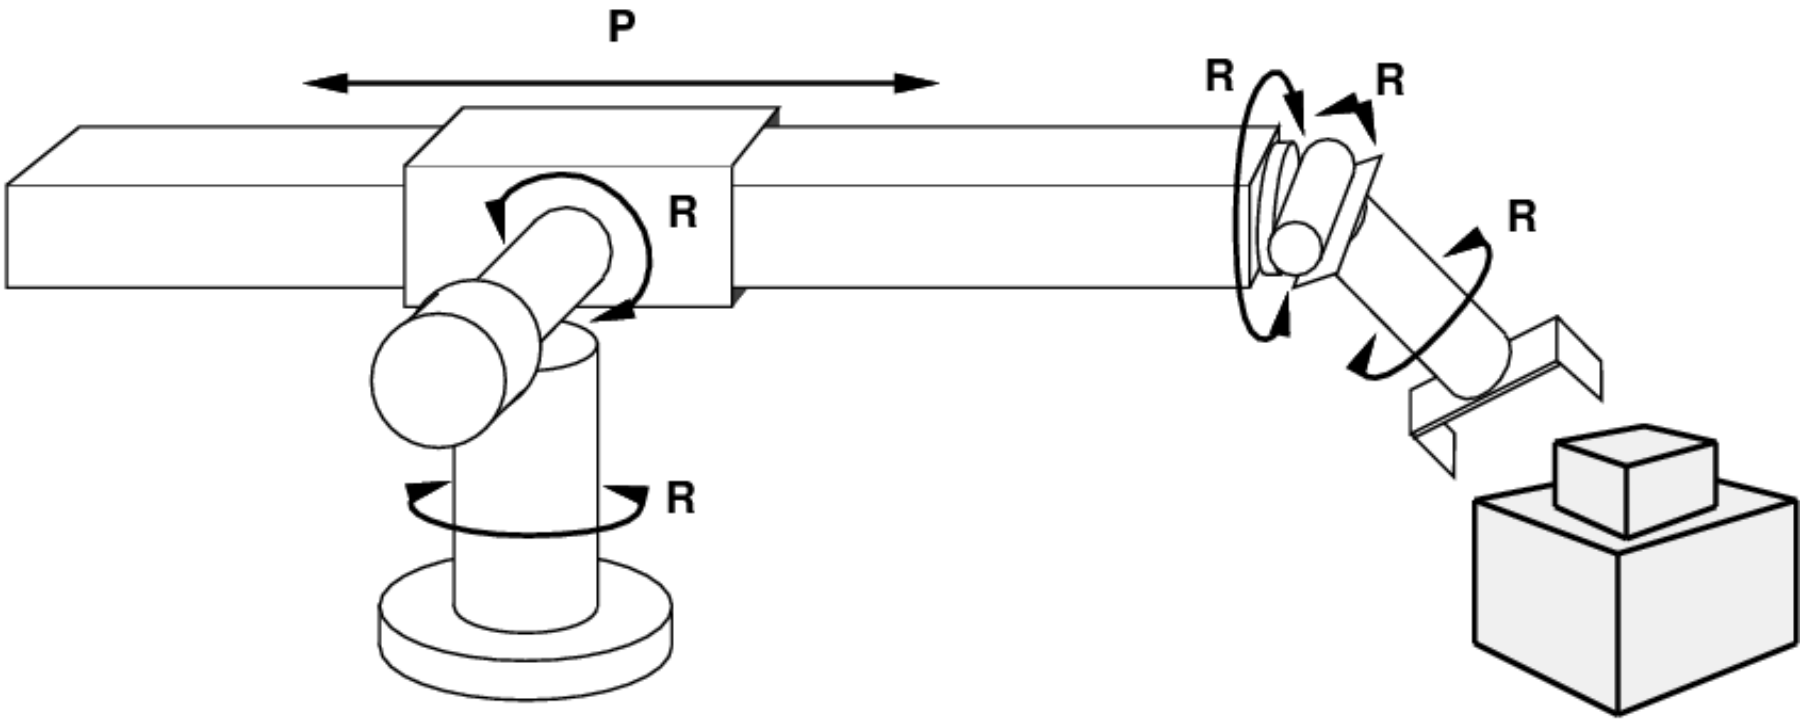

states??: real-valued coordinates of robot joint angles + parts of the object to be assembled

actions??: continuous motions of robot joints

transition model??: state+action yields new state

Example: Robotic Assembly

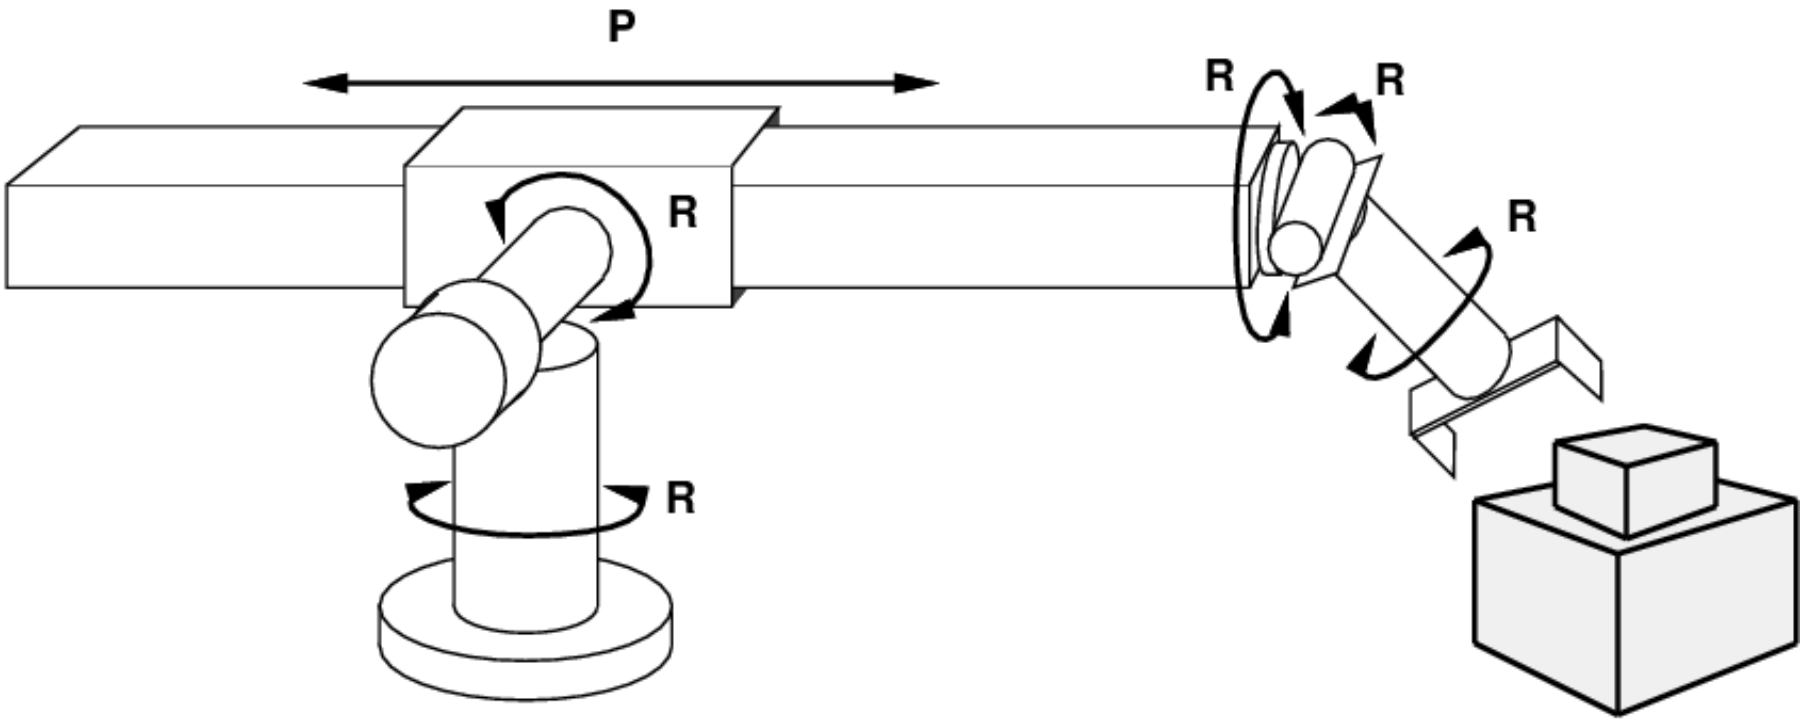

states??: real-valued coordinates of robot joint angles + parts of the object to be assembled
actions??: continuous motions of robot joints
transition model??: state+action yields new state
goal test??:

Example: Robotic Assembly

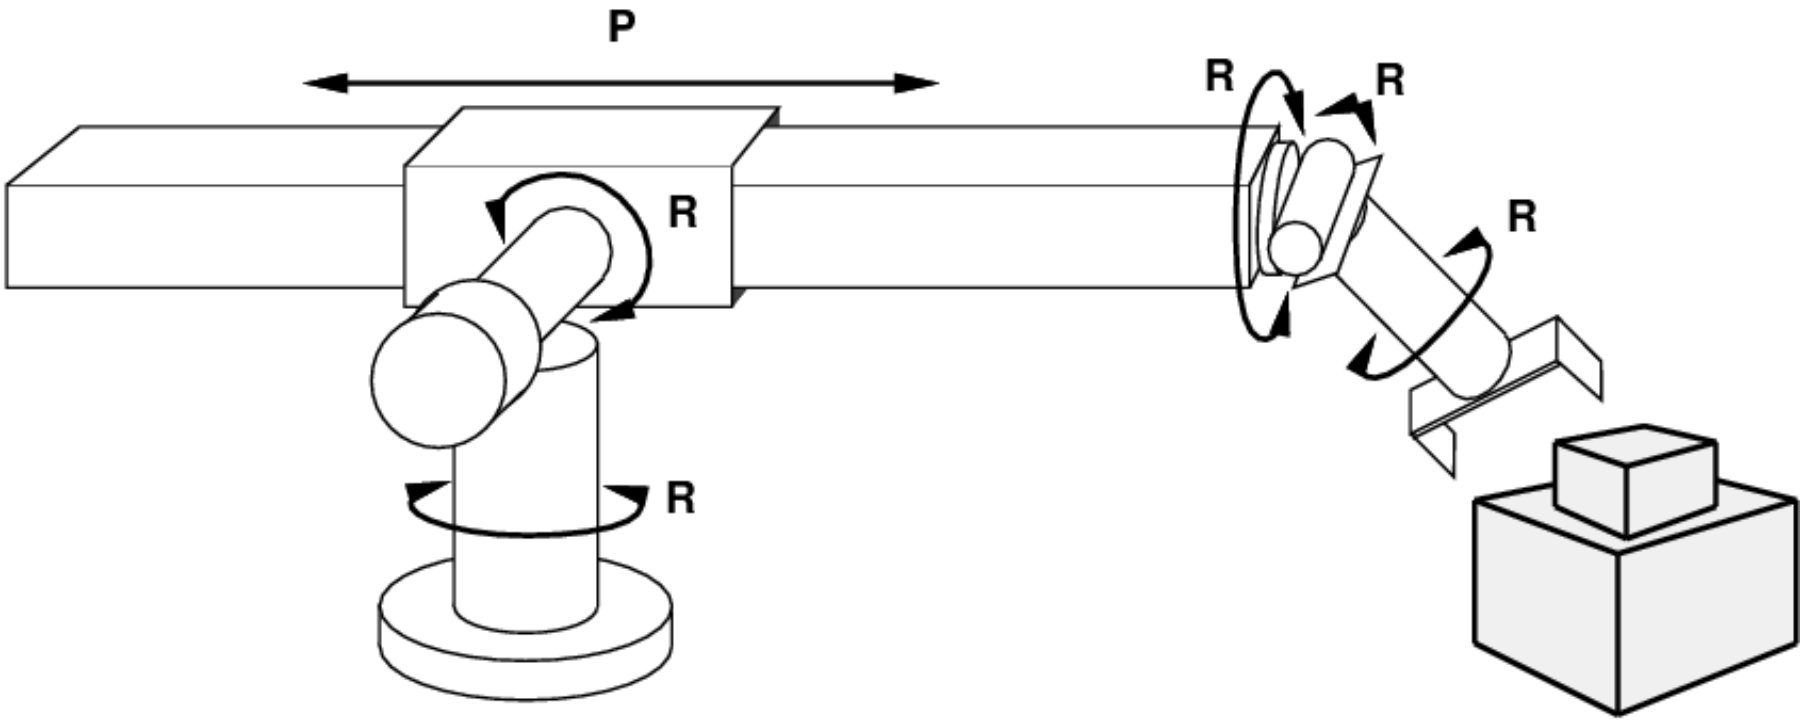

states??: real-valued coordinates of robot joint angles + parts of the object to be assembled
actions??: continuous motions of robot joints
transition model??: state+action yields new state
goal test??: complete assembly **with no robot included!**

Example: Robotic Assembly

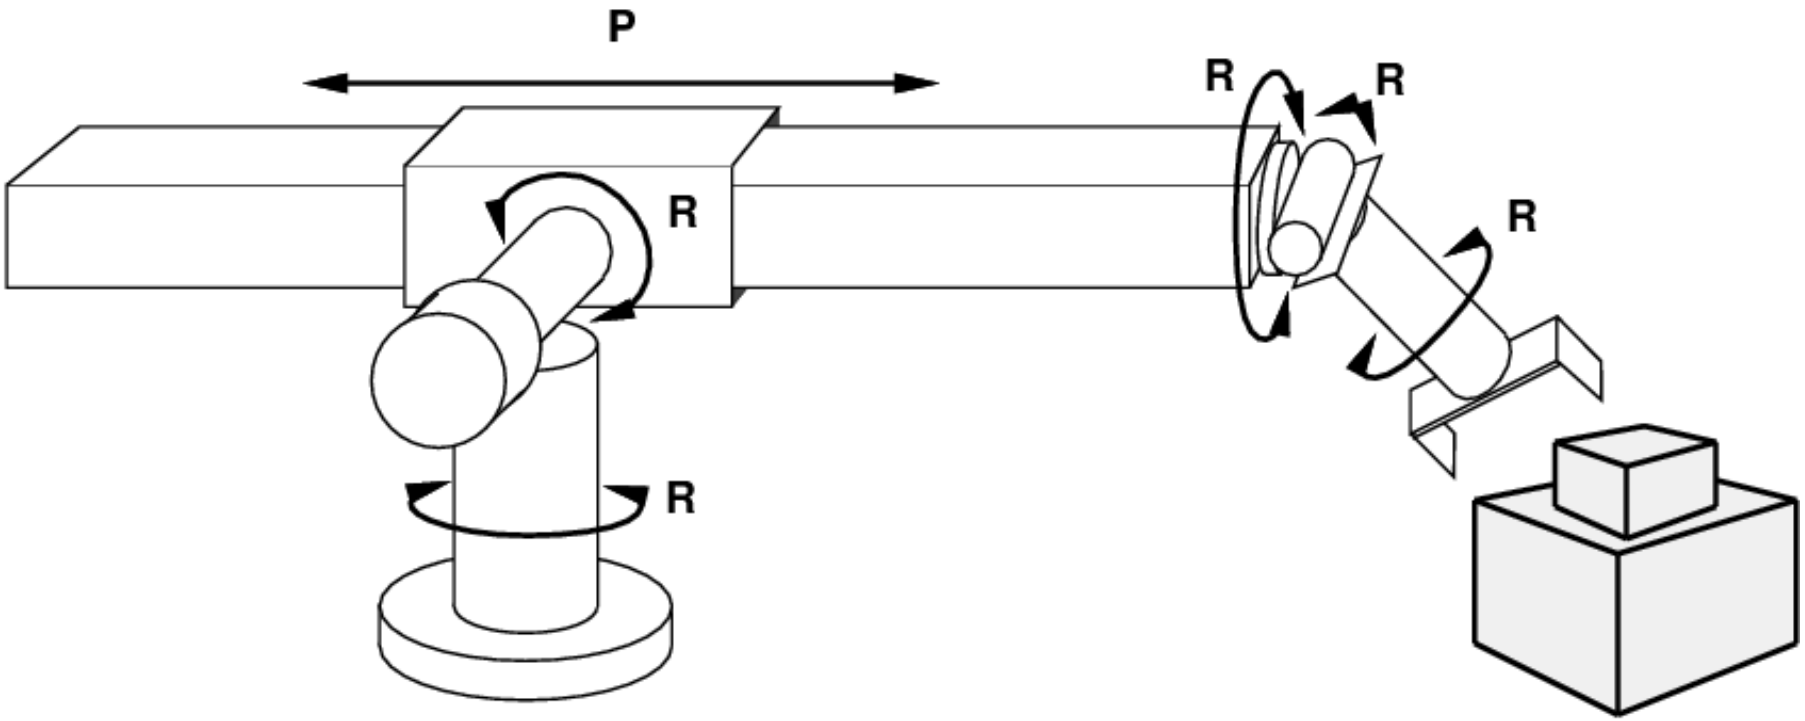

states??: real-valued coordinates of robot joint angles + parts of the object to be assembled
actions??: continuous motions of robot joints
transition model??: state+action yields new state
goal test??: complete assembly **with no robot included!**
path cost??:

Example: Robotic Assembly

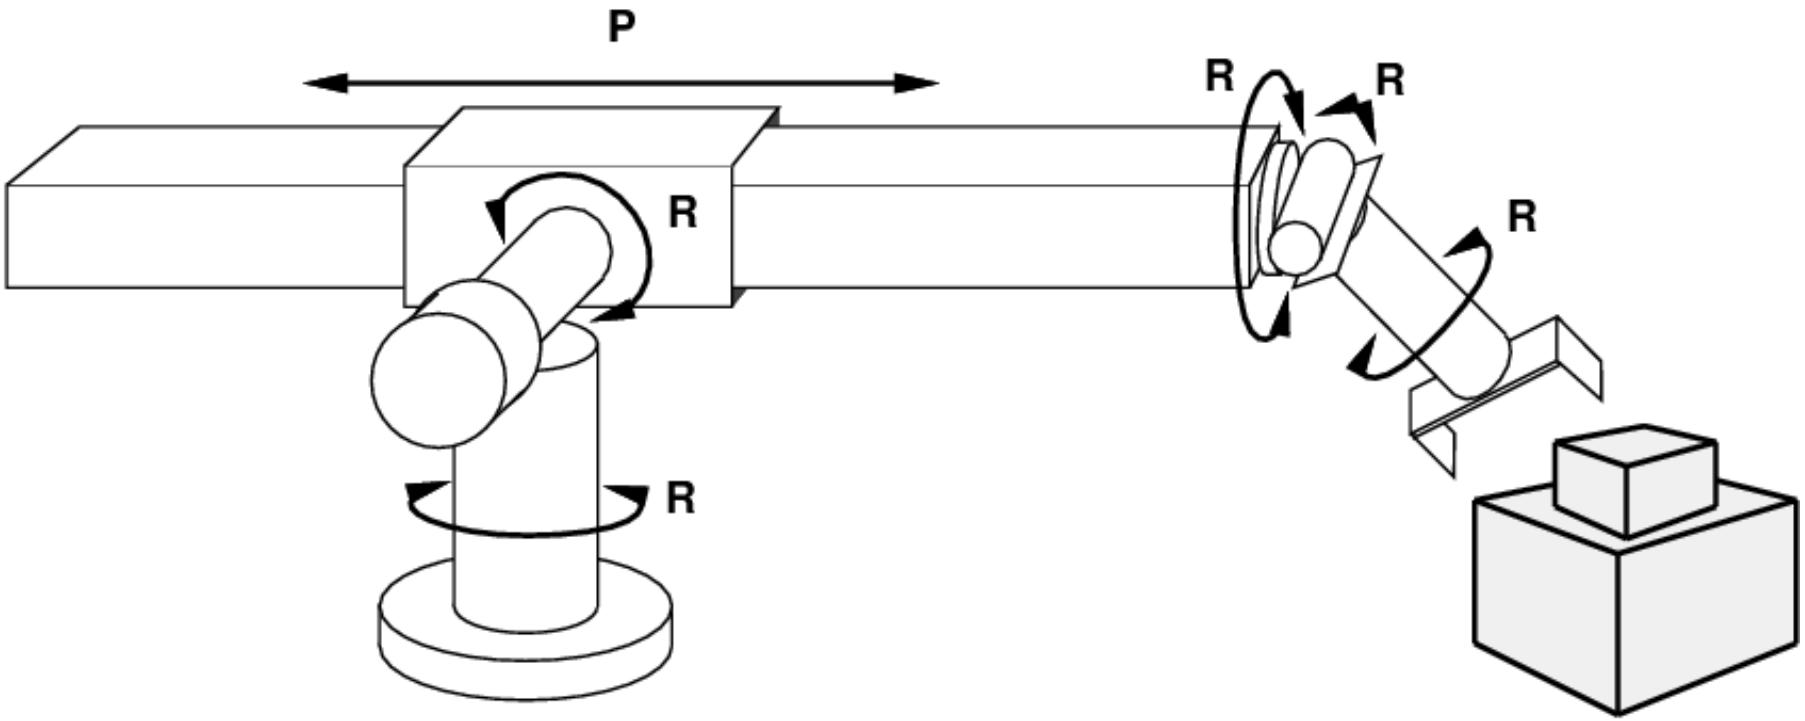

states??: real-valued coordinates of robot joint angles + parts of the object to be assembled
actions??: continuous motions of robot joints
transition model??: state+action yields new state
goal test??: complete assembly **with no robot included!**
path cost??: time to execute

Example: Robotic Assembly

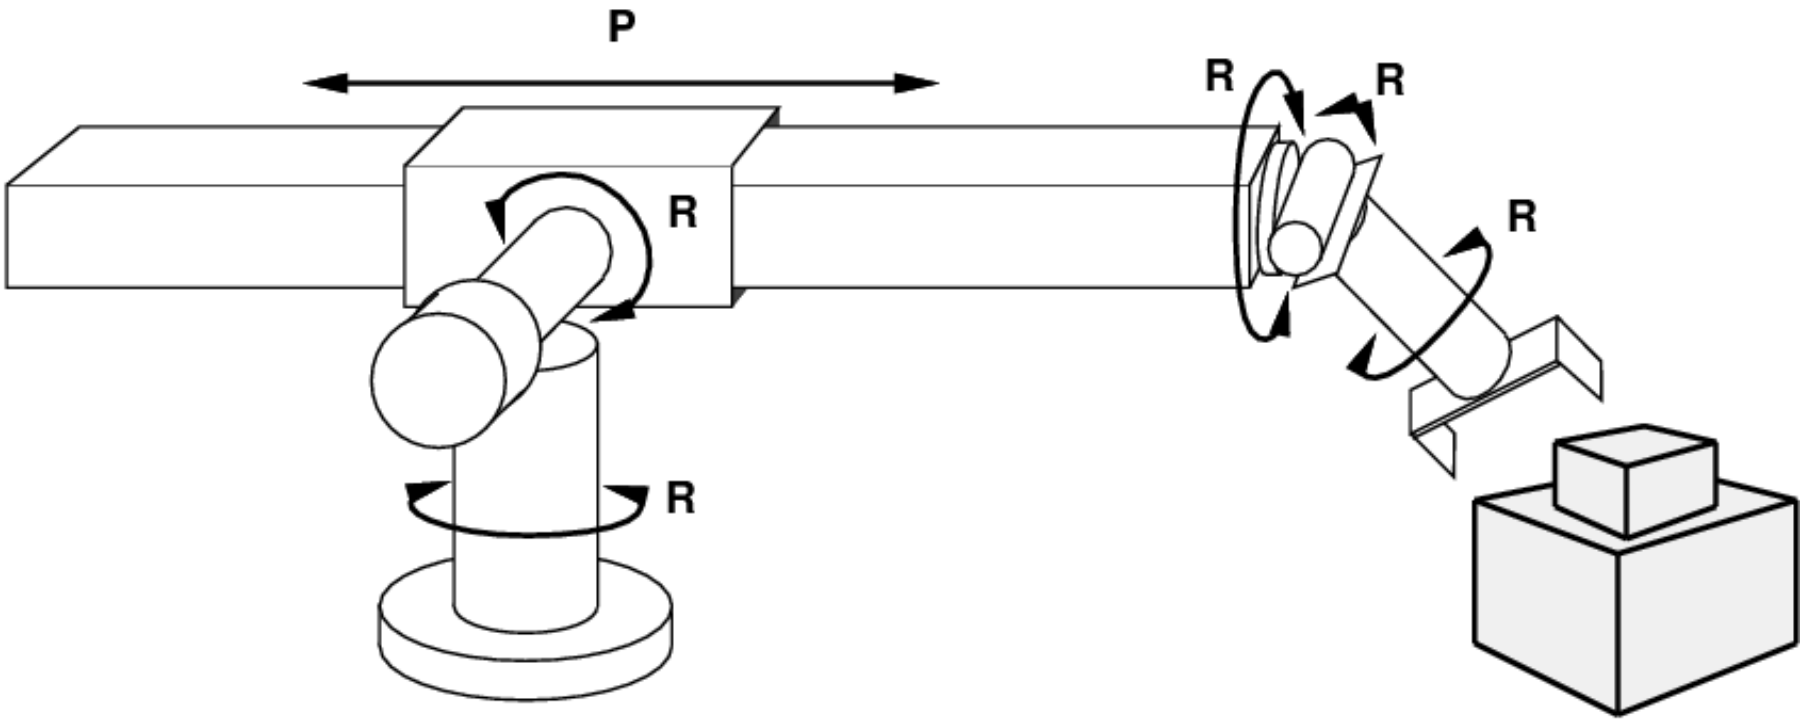

states??: real-valued coordinates of robot joint angles + parts of the object to be assembled
actions??: continuous motions of robot joints
transition model??: state+action yields new state
goal test??: complete assembly **with no robot included!**
path cost??: time to execute

Route-finding and Tour-finding Problems

The vacuum cleaner problem, 8-puzzle (block sliding), 8-queens, and others are examples of toy, route-finding problems.

Real-world route-finding problems can be found in robot navigation, manipulation, assembly, airline travel web-planning, and more.

Tour-finding problems are slighly different: "visit every city at least once, starting and ending in Bucharest."

Traveling salesperson problem (TSP): find shortest tour that visits each city exactly once, NP-hard.

Other related, complex problems: packing, scheduling, VLSI layout, protein folding, protein design.

Route Finding: Searching for Solutions

Choosing states and actions:

- abstraction: remove unnecessary information from representation; makes it cheaper to find a solution

Searching for Solutions:

- operators expand a state: generate new states from present ones
- fringe or frontier: discovered states to be expanded
- search strategy: tells which state in fringe set to expand next

Measuring Performance:

- does it find a solution?
- what is the search cost?
- what is the total cost (path cost + search cost)

Search Trees

A Search Tree:

A "what if" tree of plans and their outcomes

The start state is the root node

Children correspond to successors/neighbors

Nodes show states, but correspond to PLANS that achieve those states

For most problems, we can never actually build the whole tree

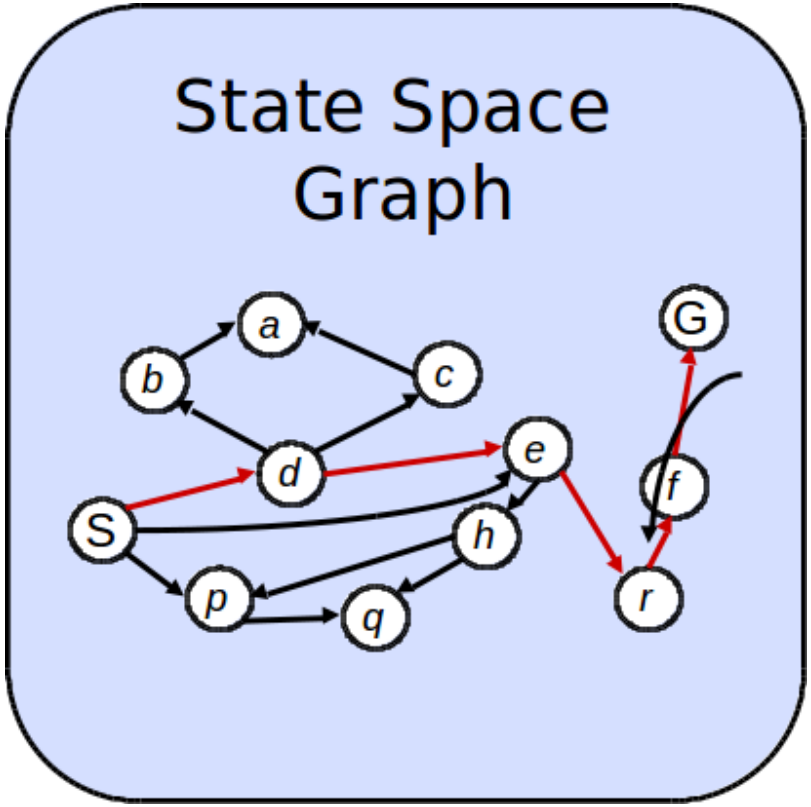

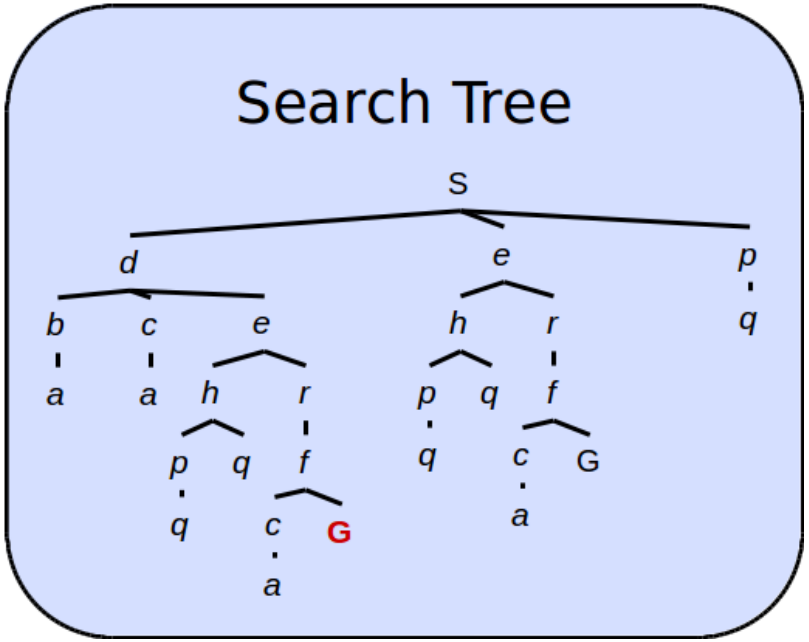

We construct both on demand and we construct as little as possible.

Quiz: State Space Graphs vs. Search Trees

Consider this 4-state space graph:

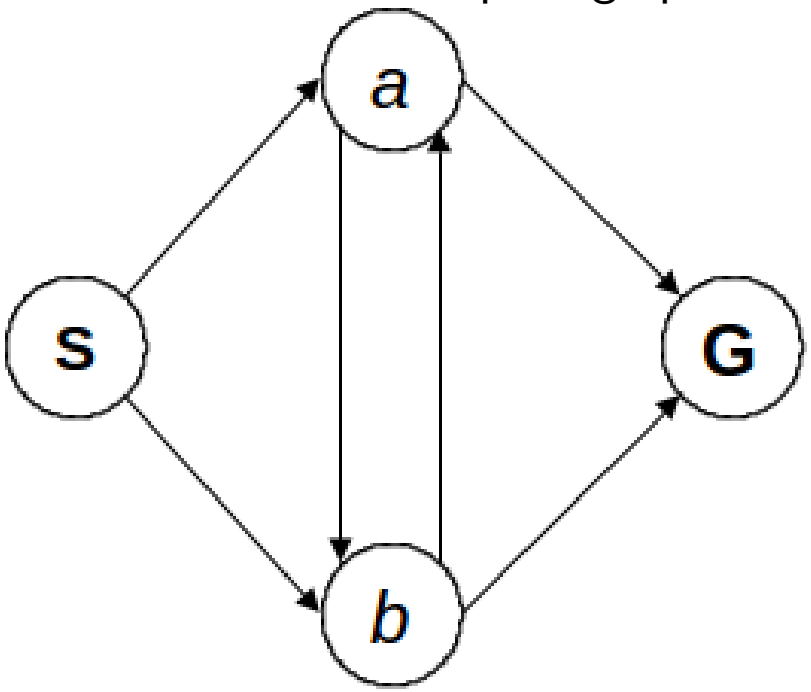

How big is its search tree?

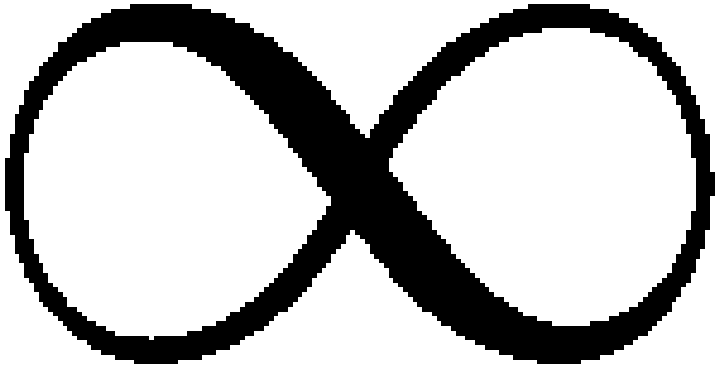

Lots of repeated structure in the search tree!

Repeated States

Failure to detect repeated states can turn a linear problem into an exponential one!

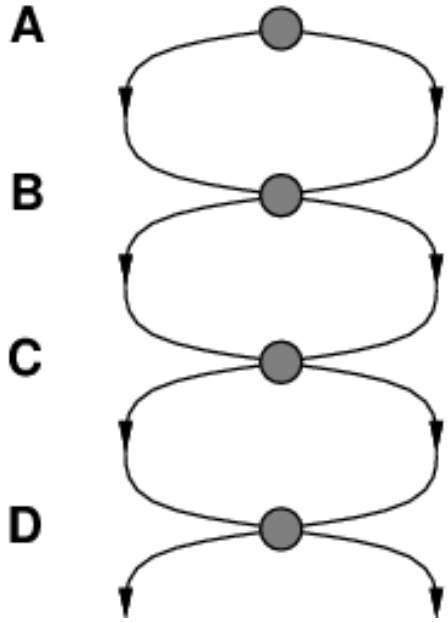

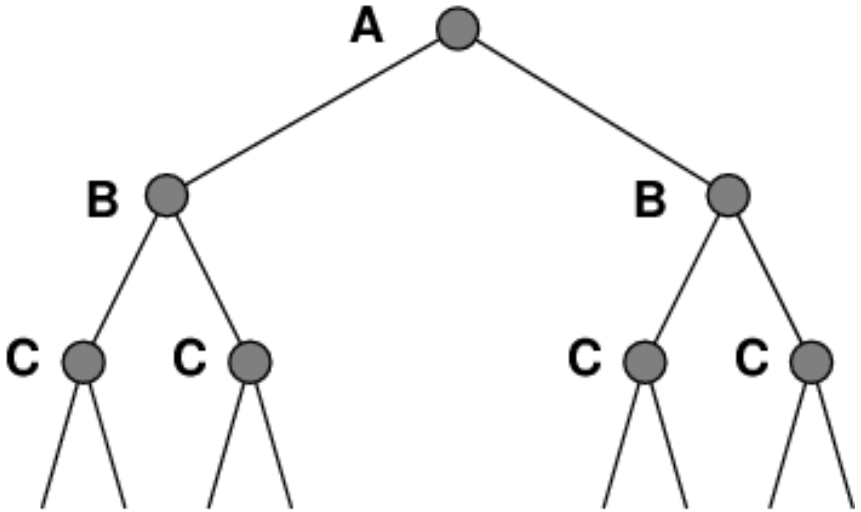

Repeated structure can be easily avoided:

Repeated States

Failure to detect repeated states can turn a linear problem into an exponential one!

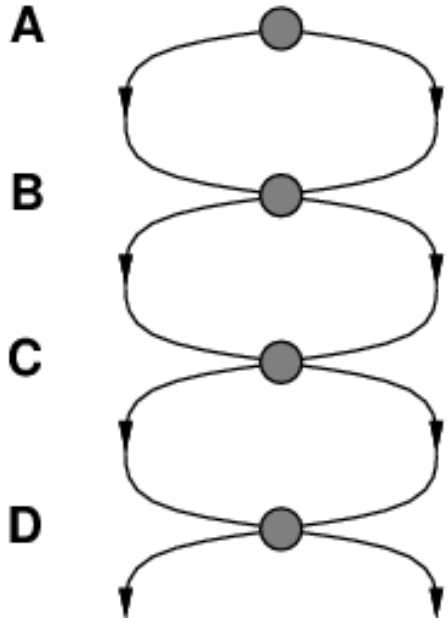

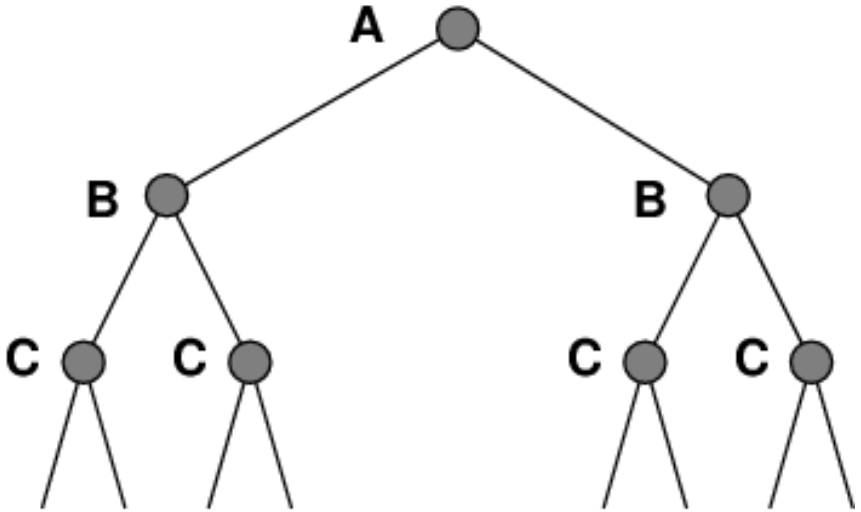

Repeated structure can be easily avoided: How?

Repeated States

Failure to detect repeated states can turn a linear problem into an exponential one!

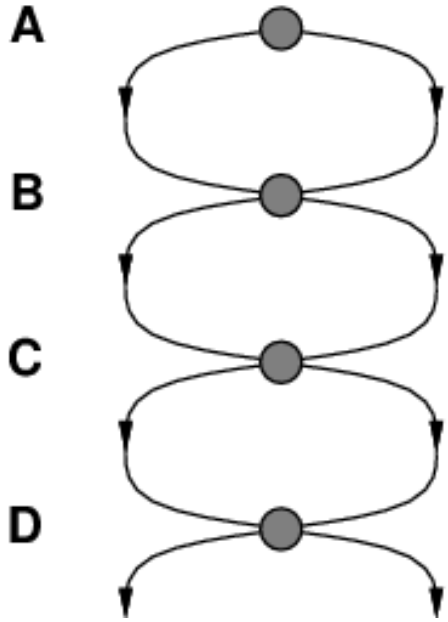

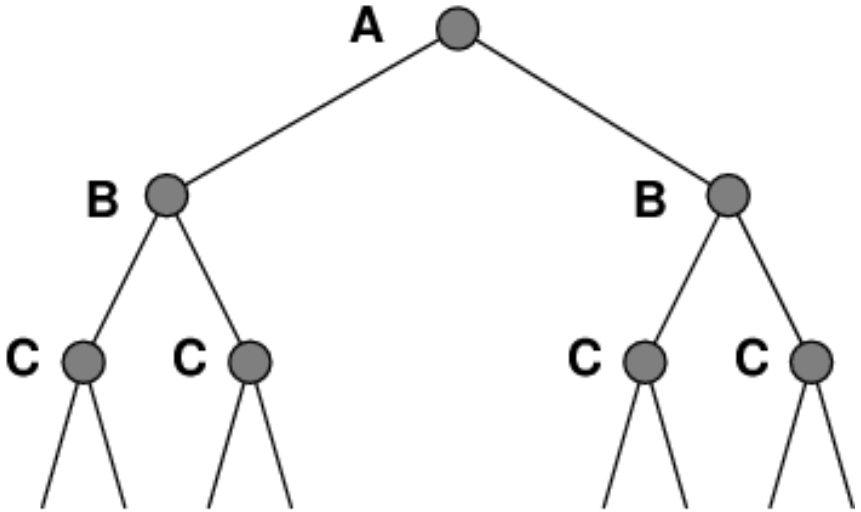

Repeated structure can be easily avoided: How?

Searching with a Search Tree

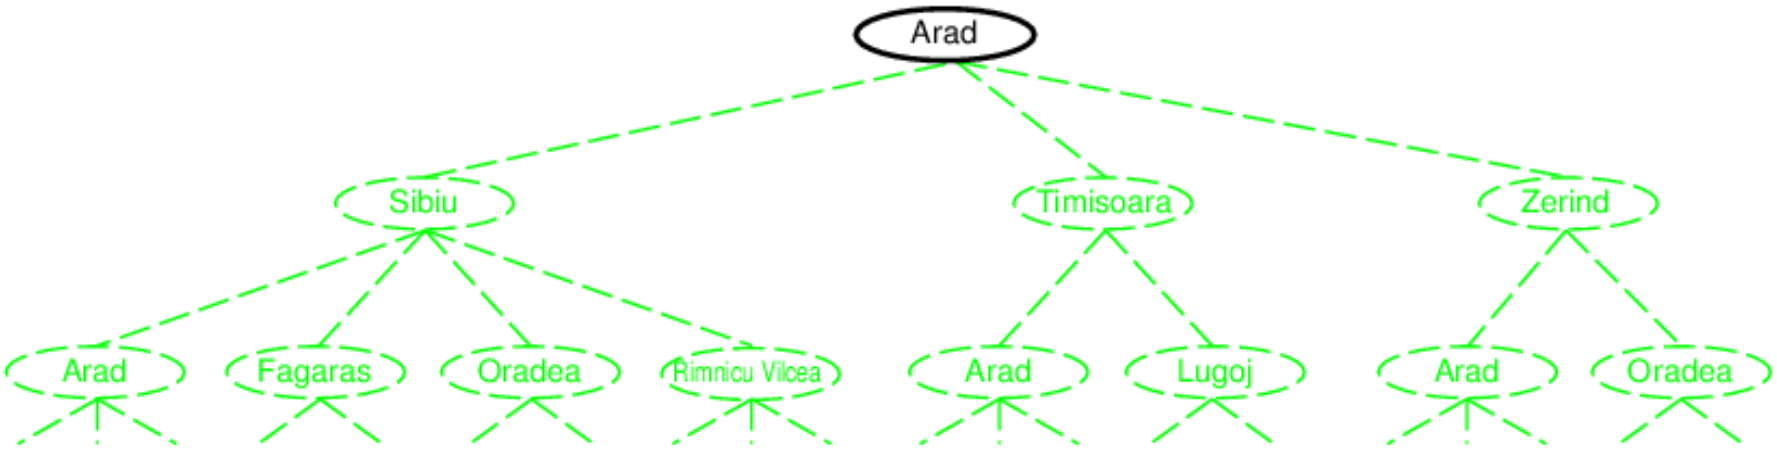

Basic idea:

Expand out potential plans (tree nodes)

Maintain a fringe of partial plans under consideration

Try to expand as few tree nodes as possible (Why?)

Searching with a Search Tree

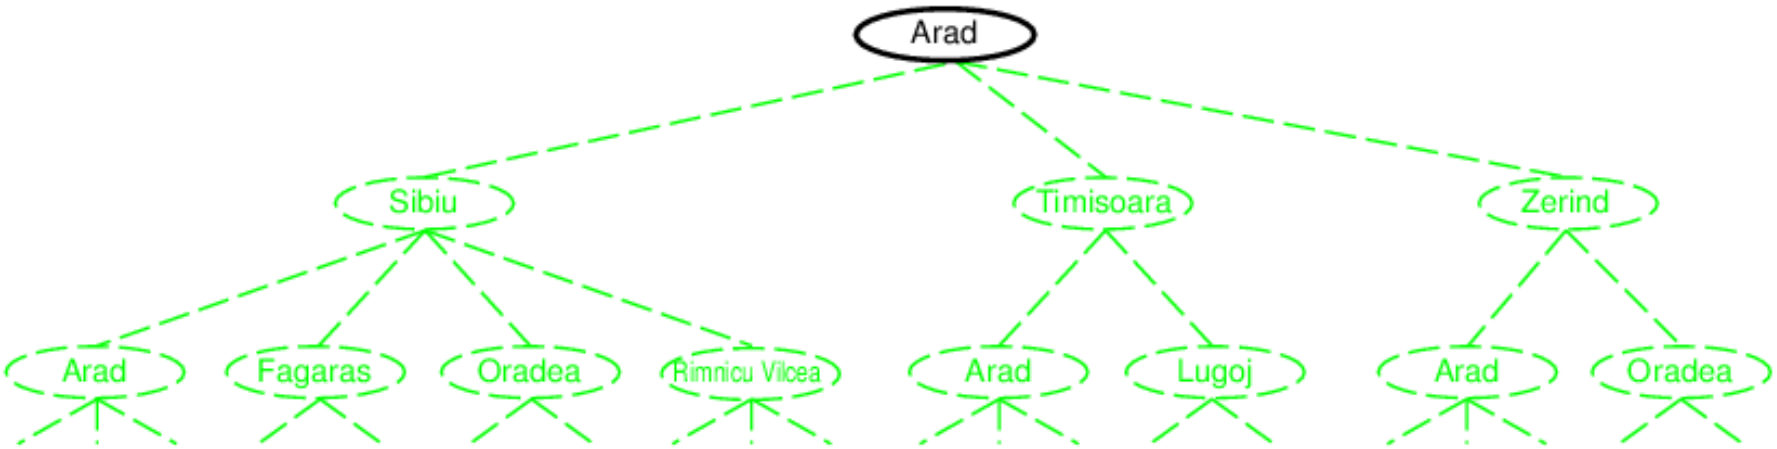

Basic idea:

Expand out potential plans (tree nodes)

Maintain a fringe of partial plans under consideration

Try to expand as few tree nodes as possible (Why?)

(Discrete) Search Algorithms

Basic idea:
offline, simulated exploration of state space
by generating successors of already-explored states
(a.k.a. expanding states)

function TREE-SEARCH(*problem*, *strategy*) **returns** a solution, or failure
initialize the search tree using the initial state of *problem*
loop do
if there are no candidates for expansion **then return** failure
choose a leaf node for expansion according to *strategy*
if the node contains a goal state **then return** the corresponding solution
else expand the node and add the resulting nodes to the search tree
end

Fundamental Properties of Discrete Search Algorithms

Fundamental to Graph Search/Traversal Algorithms:

- Successor function: generate successors/neighbors and distinguish a **goal** state from a **non-goal state**.

Completeness Goal should not be missed if a path exists.

Efficiency No edge should be traversed more than twice.

Tree Search Example

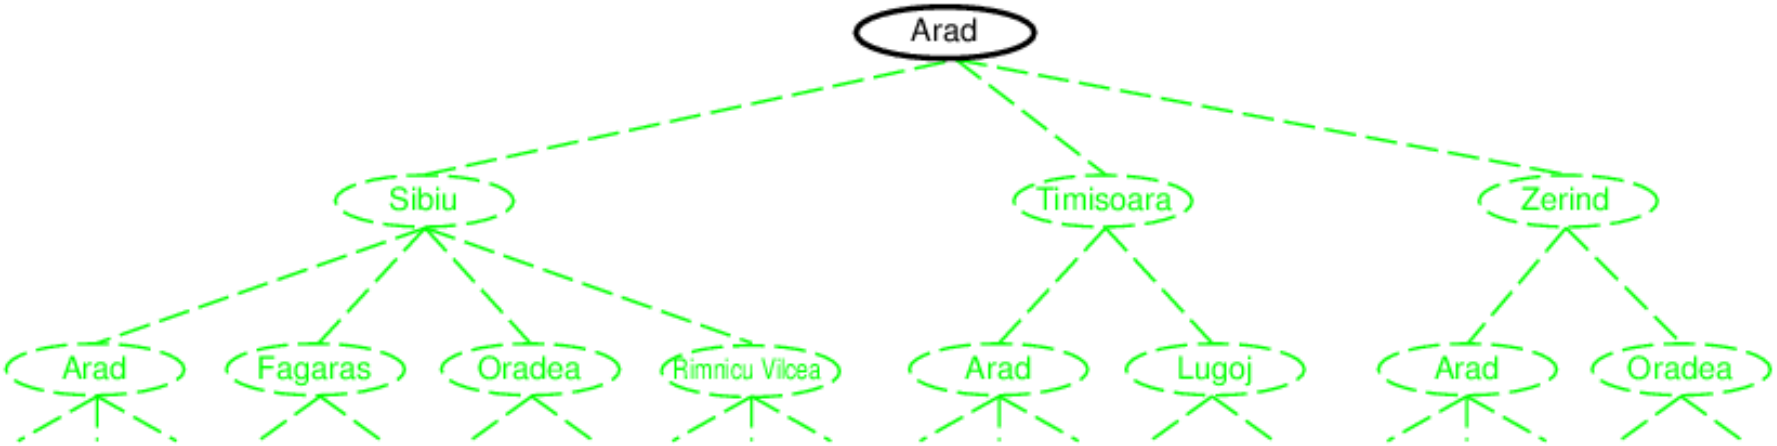

Tree Search Example

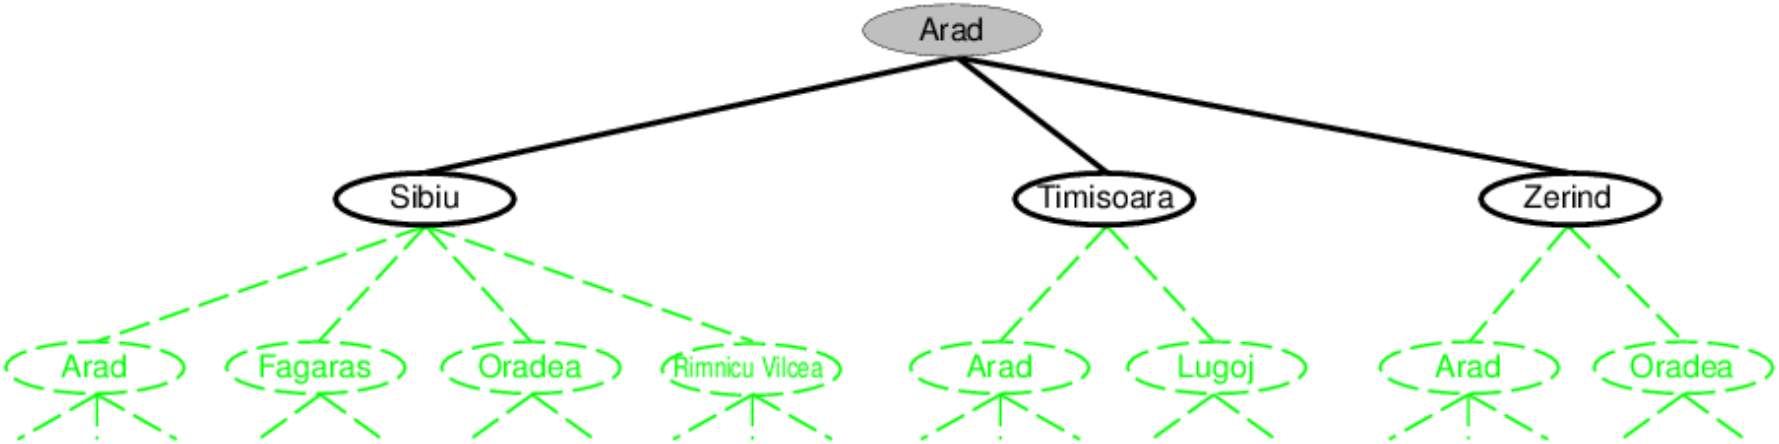

Tree Search Example

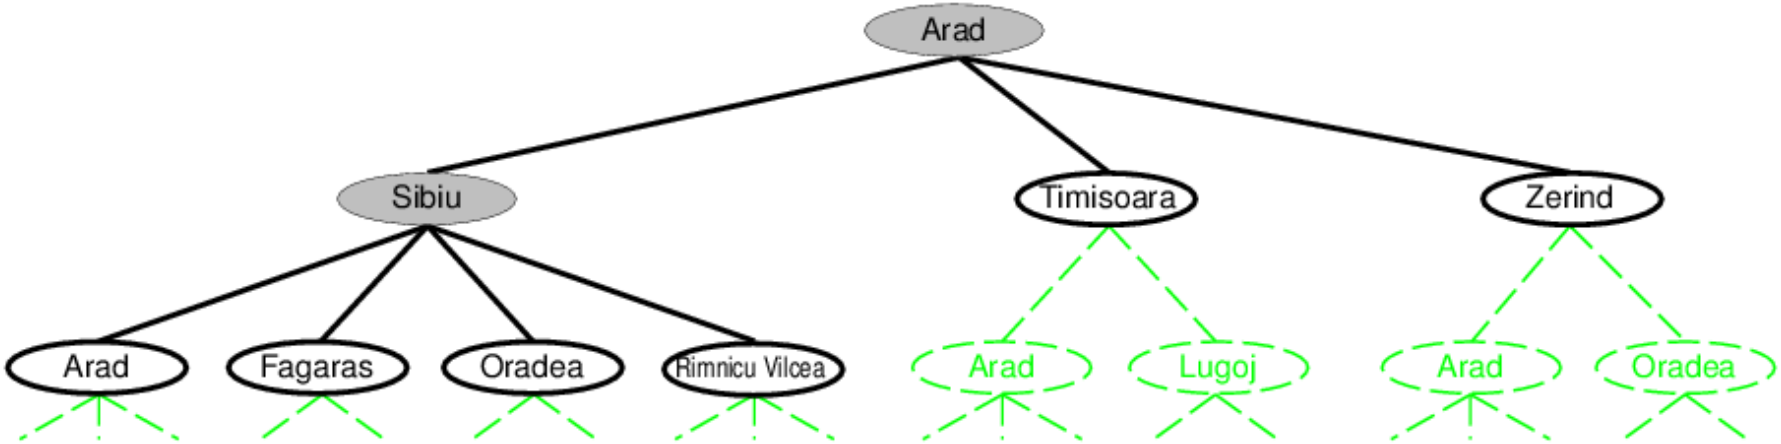

Implementation: States vs. Nodes

A state is a (representation of) a physical configuration
A node is a data structure constituting part of a search tree

includes **parent**, **children**, **depth**, **path cost** $g(x)$
States do not have parents, children, depth, or path cost!

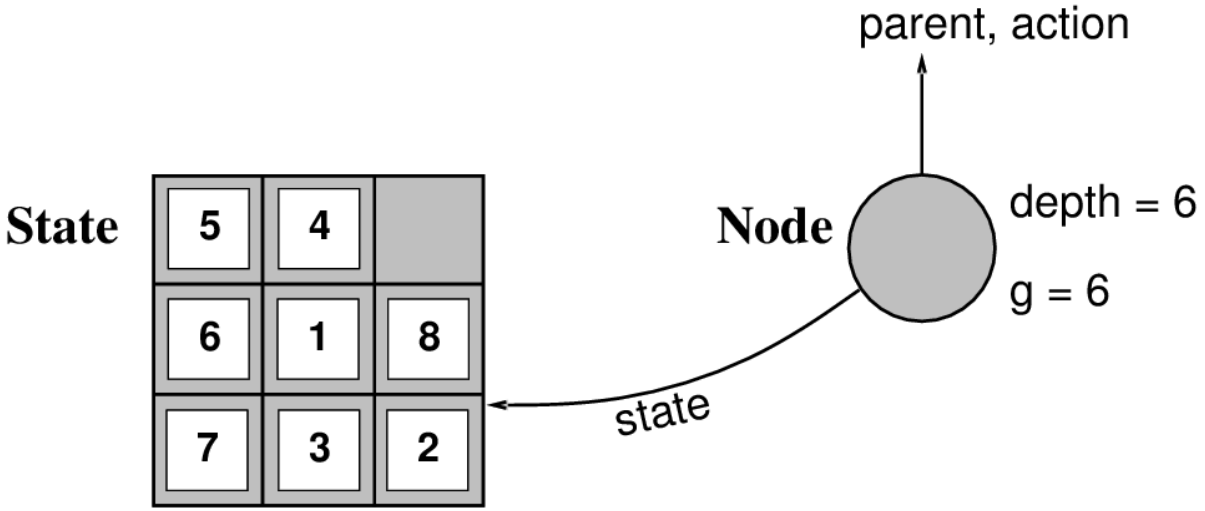

The EXPAND function creates new nodes, filling in the various fields and using the SUCCESSORFN of the problem to create the corresponding states.

Template of Graph Search with an Underlying Tree Search

- **Important insight:**
  - Any search algorithm constructs a tree, adding to it vertices from state-space graph G in some order
  - $G = (V, E)$ —— look at it as split in two: set S on one side and $V - S$ on the other
  - search proceeds as vertices are taken from $V - S$ and added to S
  - search ends when $V - S$ is empty or goal found
  - First vertex to be taken from $V - S$ and added to S?
  - Next vertex? (... expansion ...)
  - Where to keep track of these vertices? (... fringe/frontier ...)
- **Important ideas:**
  - Fringe (frontier into $V - S$/border between S and $V - S$)
  - Expansion (neighbor generation so can add to fringe)
  - Exploration strategy (what order to grow S?)
- **Main question:**
  - which fringe/frontier nodes to explore/expand next?
  - strategy distinguishes search algorithms from one another

Implementation: General Search

```
function TREE-SEARCH( problem, fringe) returns a solution, or failure
    fringe ← INSERT(MAKE-NODE(INITIAL-STATE[problem]), fringe)
    loop do
        if fringe is empty then return failure
        node ← REMOVE-FRONT(fringe)
        if GOAL-TEST(problem, STATE(node)) then return node
        fringe ← INSERTALL(EXPAND(node, problem), fringe)
```

```
function EXPAND( node, problem) returns a set of nodes
    successors ← the empty set
    for each action, result in SUCCESSOR-FN(problem, STATE[node]) do
        s ← a new NODE
      PARENT-NODE[s] ← node;  ACTION[s] ← action;  STATE[s] ← result
       PATH-COST[s] ← PATH-COST[node] + STEP-COST(STATE[node],
action, result)
        DEPTH[s] ← DEPTH[node] + 1
        add s to successors
    return successors
```

Search Strategies

A strategy is defined by picking the **order of node expansion**

Strategies are evaluated along the following dimensions:

- completeness—does it always find a solution if one exists?
- time complexity—number of nodes generated/expanded
- space complexity—maximum number of nodes in memory
- optimality—does it always find a least-cost solution?

Time and space complexity are measured in terms of:

- b—maximum branching factor of the search tree
- d—depth of the least-cost solution
- m—maximum depth of the state space (may be ∞)

Characteristics of Uninformed Graph Search/Traversal:

- There is no additional information about states/vertices beyond what is provided in the problem definition.
- All that the search does is generate neighbors and distinguish a **goal** state from a **non-goal state**.

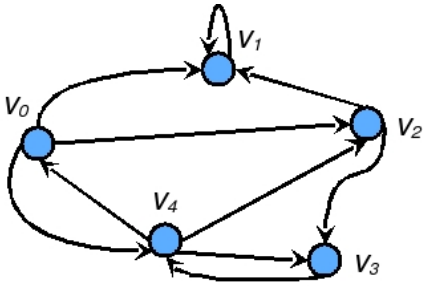

The systematic search "lays out" all paths from initial vertex; it traverses the search tree of the graph.

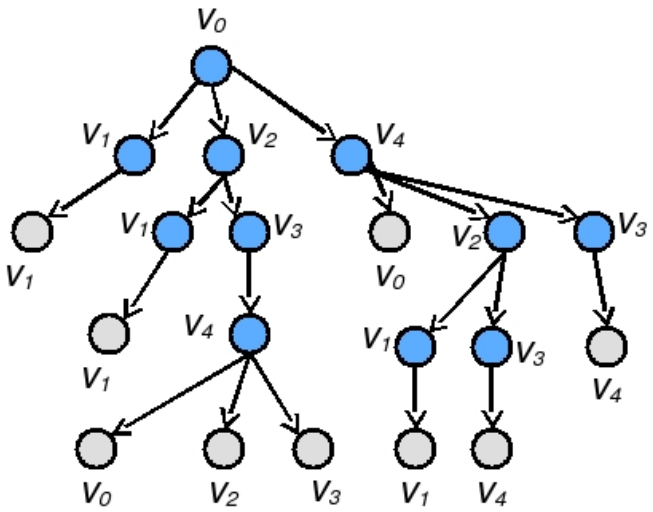

F: search data structure (fringe)
parent array: stores "edge comes from" to record visited states

```
F.insert(v)
parent[v] ← true
while not F.isEmpty do
    u ← F.extract()
    if isGoal(u) then
        return true
    for each v in outEdges(u) do
        if no parent[v] then
            F.insert(v)
            parent[v] ← u
```

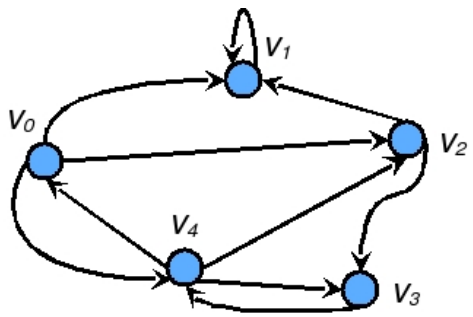

Figure: Graph

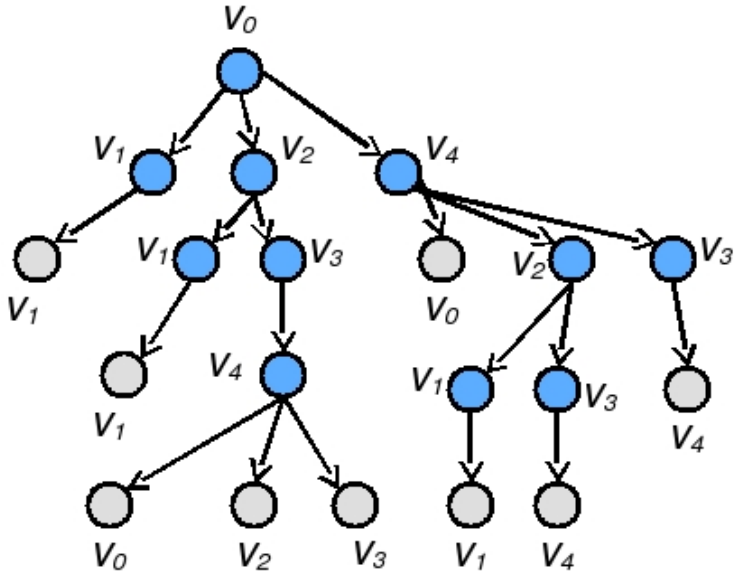

Figure: Search Tree of Graph

Uninformed Search Algorithms

- Breadth-first Search (BFS)
- Depth-first Search (DFS)
- Depth-limited search (DLS)
- Iterative Deepening Search (IDS)

Breadth-first Search (BFS)

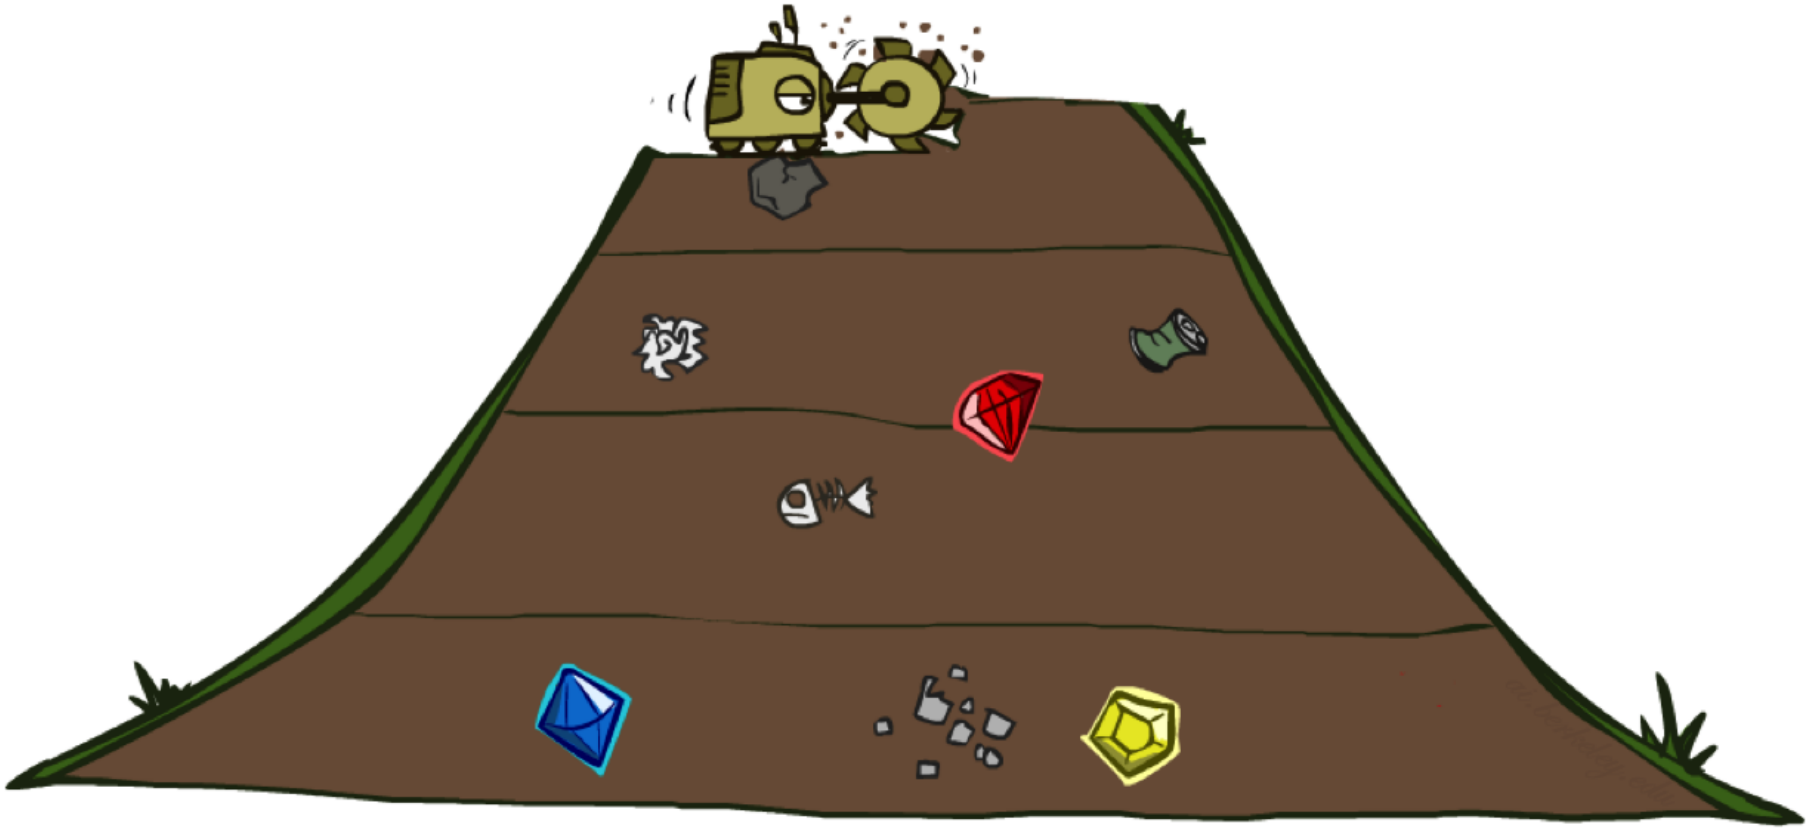

Strategy: Expand shallowest unexpanded node

Implementation:
fringe = first-in first-out (FIFO), i.e., unvisited neighbors go at end
F is a queue

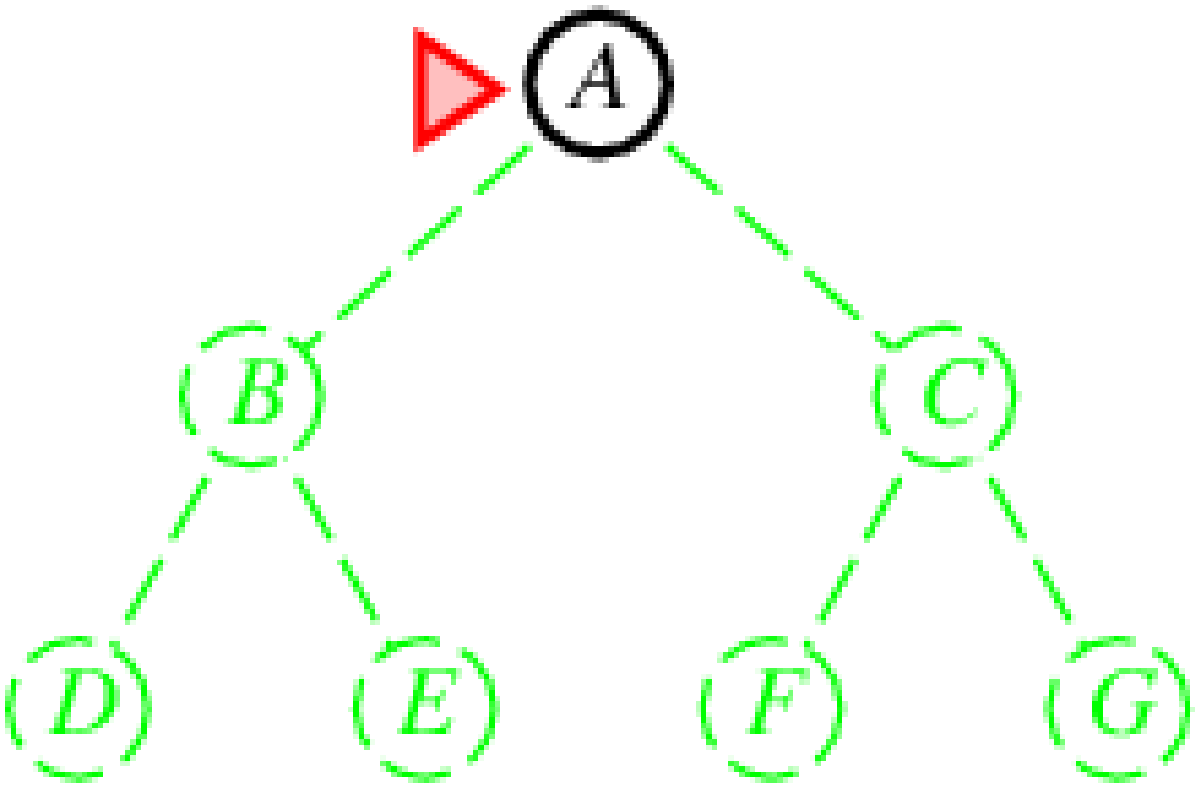

Strategy: Expand shallowest unexpanded node

Implementation:
fringe = first-in first-out (FIFO), i.e., unvisited neighbors go at end
F is a queue

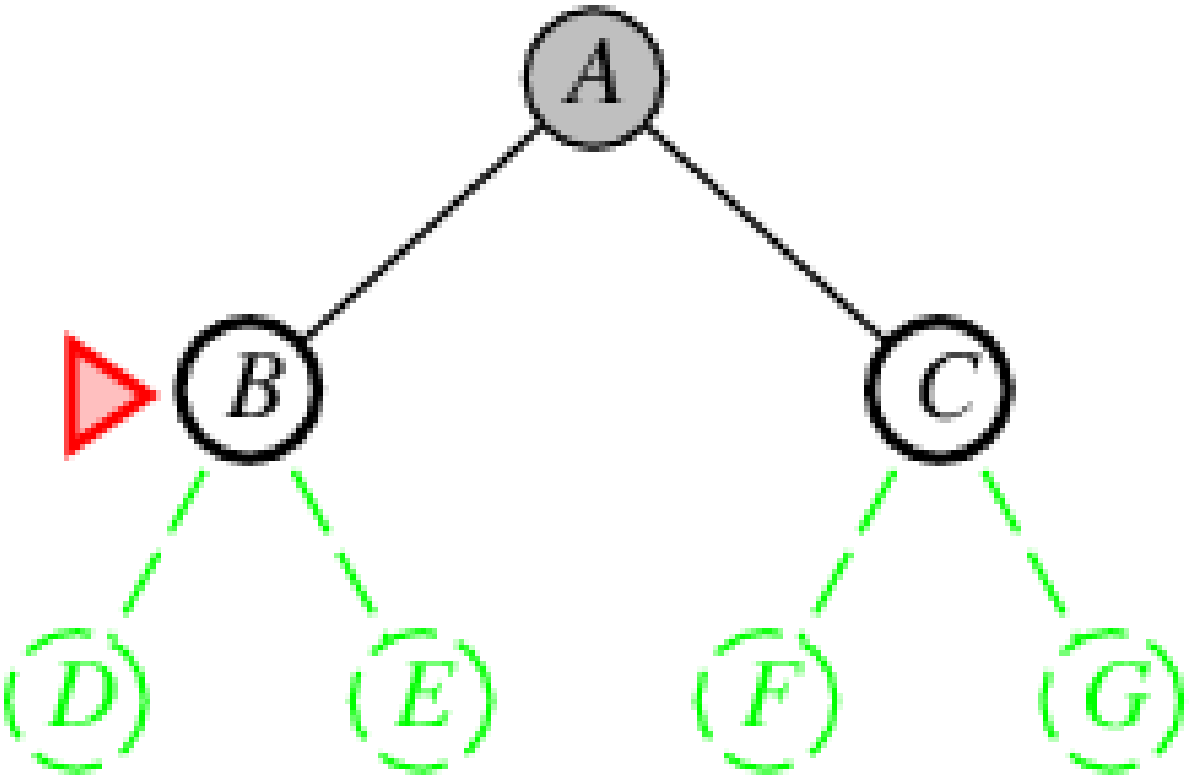

Strategy: Expand shallowest unexpanded node

Implementation:
fringe = first-in first-out (FIFO), i.e., unvisited neighbors go at end
F is a queue

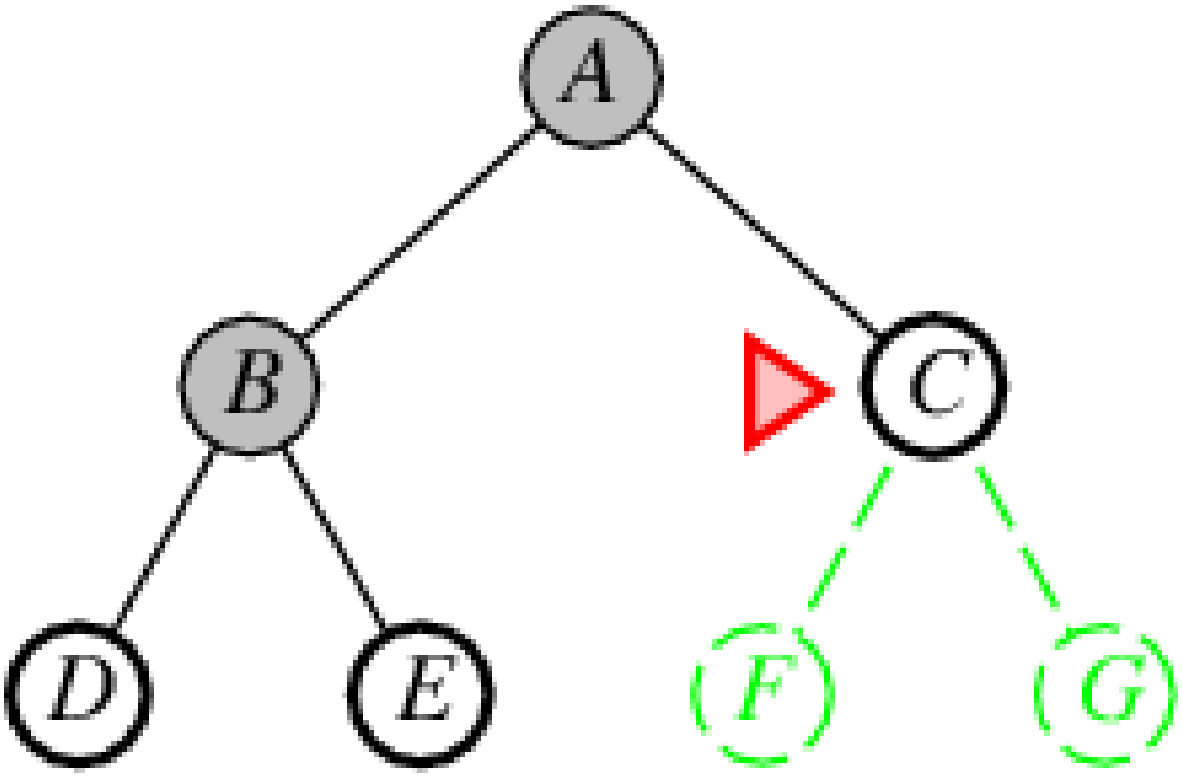

Strategy: Expand shallowest unexpanded node

Implementation:
fringe = first-in first-out (FIFO), i.e., unvisited neighbors go at end
F is a queue

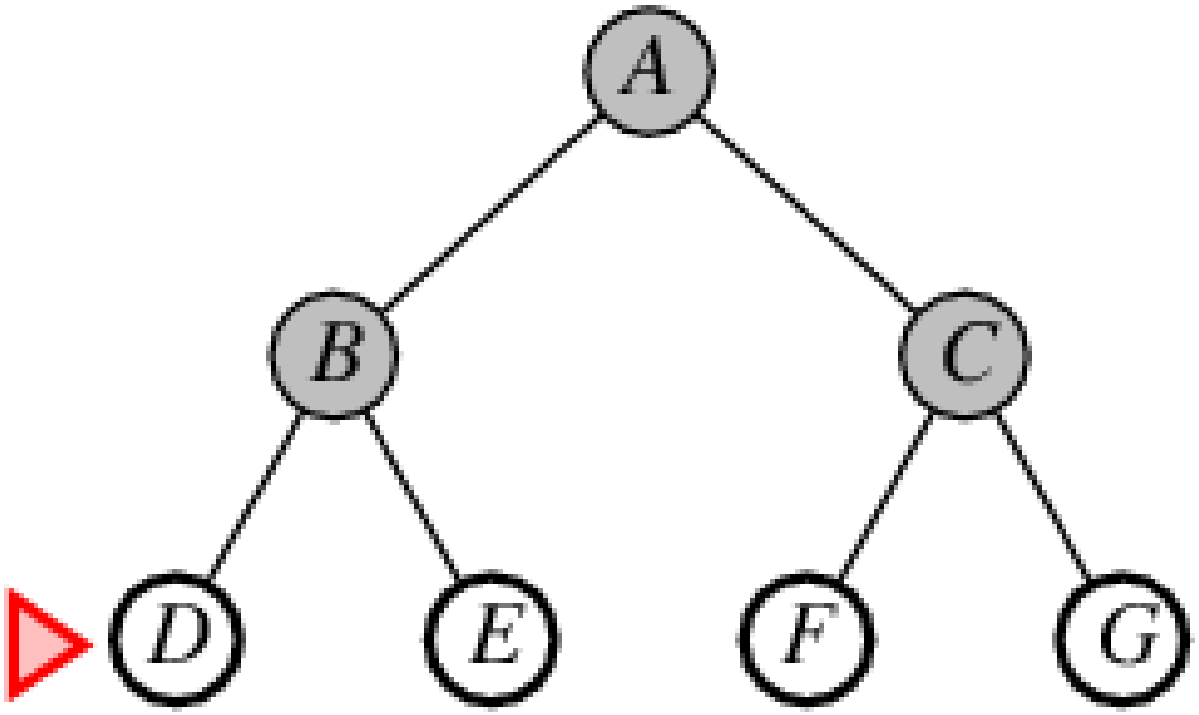

Breadth-first Search (BFS)

F: search data structure (fringe)

F is a queue (FIFO) in BFS!

parent array: stores "edge comes from" to record visited states

```
F.insert(v)
parent[v] ← true
while not F.isEmpty do
    u ← F.extract()
    if isGoal(u) then
        return true
    for each v in outEdges(u) do
        if no parent[v] then
            F.insert(v)
            parent[v] ← u
```

Running Time?

Breadth-first Search (BFS)

F: search data structure (fringe)

F is a queue (FIFO) in BFS!

parent array: stores "edge comes from" to record visited states

```
F.insert(v)
parent[v] ← true
while not F.isEmpty do
    u ← F.extract()
    if isGoal(u) then
        return true
    for each v in outEdges(u) do
        if no parent[v] then
            F.insert(v)
            parent[v] ← u
```

Running Time?

Let V and E be vertices and edges in search tree

Breadth-first Search (BFS)

F: search data structure (fringe)

F is a queue (FIFO) in BFS!

parent array: stores "edge comes from" to record visited states

```
F.insert(v)
parent[v] ← true
while not F.isEmpty do
    u ← F.extract()
    if isGoal(u) then
        return true
    for each v in outEdges(u) do
        if no parent[v] then
            F.insert(v)
            parent[v] ← u
```

Running Time?

Let V and E be vertices and edges in search tree

$O(|V| + |E|)$

Breadth-first Search (BFS)

F: search data structure (fringe)

F is a queue (FIFO) in BFS!

parent array: stores "edge comes from" to record visited states

```
F.insert(v)
parent[v] ← true
while not F.isEmpty do
    u ← F.extract()
    if isGoal(u) then
        return true
    for each v in outEdges(u) do
        if no parent[v] then
            F.insert(v)
            parent[v] ← u
```

Running Time?

Let V and E be vertices and edges in search tree

$O(|V| + |E|)$

What about in terms of b and m?

Breadth-first Search (BFS)

F: search data structure (fringe)

F is a queue (FIFO) in BFS!

parent array: stores "edge comes from" to record visited states

```
F.insert(v)
parent[v] ← true
while not F.isEmpty do
    u ← F.extract()
    if isGoal(u) then
        return true
    for each v in outEdges(u) do
        if no parent[v] then
            F.insert(v)
            parent[v] ← u
```

Running Time?

Let V and E be vertices and edges in search tree

$O(|V| + |E|)$

What about in terms of b and m?

Properties of Breadth-first Search (BFS)

Complete??

Properties of Breadth-first Search (BFS)

Complete?? Yes (if b is finite)

Properties of Breadth-first Search (BFS)

Complete?? Yes (if b is finite)

Time??

Properties of Breadth-first Search (BFS)

Complete?? Yes (if b is finite)

Time?? $1 + b + b^2 + b^3 + \ldots + b^d + b(b^d - 1) = O(b^{d+1})$, i.e., exp. in d

Properties of Breadth-first Search (BFS)

Complete?? Yes (if b is finite)

Time?? $1 + b + b^2 + b^3 + \ldots + b^d + b(b^d - 1) = O(b^{d+1})$, i.e., exp. in d

Space??

Properties of Breadth-first Search (BFS)

Complete?? Yes (if b is finite)

Time?? $1 + b + b^2 + b^3 + \ldots + b^d + b(b^d - 1) = O(b^{d+1})$, i.e., exp. in d

Space?? $O(b^{d+1})$ (keeps every node in memory)

Properties of Breadth-first Search (BFS)

Complete?? Yes (if b is finite)

Time?? $1 + b + b^2 + b^3 + \ldots + b^d + b(b^d - 1) = O(b^{d+1})$, i.e., exp. in d

Space?? $O(b^{d+1})$ (keeps every node in memory)

Optimal??

Properties of Breadth-first Search (BFS)

Complete?? Yes (if b is finite)

Time?? $1 + b + b^2 + b^3 + \ldots + b^d + b(b^d - 1) = O(b^{d+1})$, i.e., exp. in d

Space?? $O(b^{d+1})$ (keeps every node in memory)

Optimal?? Yes (if cost $= 1$ per step); not optimal in general

Properties of Breadth-first Search (BFS)

Complete?? Yes (if b is finite)

Time?? $1 + b + b^2 + b^3 + \ldots + b^d + b(b^d - 1) = O(b^{d+1})$, i.e., exp. in d

Space?? $O(b^{d+1})$ (keeps every node in memory)

Optimal?? Yes (if cost $= 1$ per step); not optimal in general

Space

Properties of Breadth-first Search (BFS)

Complete?? Yes (if b is finite)

Time?? $1 + b + b^2 + b^3 + \ldots + b^d + b(b^d - 1) = O(b^{d+1})$, i.e., exp. in d

Space?? $O(b^{d+1})$ (keeps every node in memory)

Optimal?? Yes (if cost = 1 per step); not optimal in general

Space is the big problem; can easily generate nodes at 100MB/sec

so 24hrs = 8640GB.

Properties of Breadth-first Search (BFS)

Complete?? Yes (if b is finite)

Time?? $1 + b + b^2 + b^3 + \ldots + b^d + b(b^d - 1) = O(b^{d+1})$, i.e., exp. in d

Space?? $O(b^{d+1})$ (keeps every node in memory)

Optimal?? Yes (if cost $= 1$ per step); not optimal in general

Space is the big problem; can easily generate nodes at 100MB/sec

so 24hrs $=$ 8640GB.

BFS Summary

Basic Behavior:

- Expands all nodes at depth d before those at depth $d + 1$
- The sequence is root, then children, then grandchildren in the search tree.

Problems:

- If the path cost is a non-decreasing function of the depth of the goal node, then BFS is optimal (uniform cost search a generalization)

BFS Summary

Basic Behavior:

- Expands all nodes at depth d before those at depth $d + 1$
- The sequence is root, then children, then grandchildren in the search tree.

Problems:

- If the path cost is a non-decreasing function of the depth of the goal node, then BFS is optimal (uniform cost search a generalization)
- A graph with no weights can be considered to have edges of weight 1. In this case, BFS is optimal.

BFS Summary

Basic Behavior:

- Expands all nodes at depth d before those at depth $d + 1$
- The sequence is root, then children, then grandchildren in the search tree.

Problems:

- If the path cost is a non-decreasing function of the depth of the goal node, then BFS is optimal (uniform cost search a generalization)
- A graph with no weights can be considered to have edges of weight 1. In this case, BFS is optimal.
- BFS will find shallowest goal after expanding all shallower nodes (if branching factor is finite). Hence, BFS is complete.

BFS Summary

Basic Behavior:

- Expands all nodes at depth d before those at depth $d + 1$
- The sequence is root, then children, then grandchildren in the search tree.

Problems:

- If the path cost is a non-decreasing function of the depth of the goal node, then BFS is optimal (uniform cost search a generalization)
- A graph with no weights can be considered to have edges of weight 1. In this case, BFS is optimal.
- BFS will find shallowest goal after expanding all shallower nodes (if branching factor is finite). Hence, BFS is complete.
- BFS is not very popular because time and space complexity are exponential: $O(b^{d+1})$ and $O(b^{d+1})$, respectively.
- Memory requirements of BFS are a bigger problem.

BFS Summary

Basic Behavior:

- Expands all nodes at depth d before those at depth $d + 1$
- The sequence is root, then children, then grandchildren in the search tree.

Problems:

- If the path cost is a non-decreasing function of the depth of the goal node, then BFS is optimal (uniform cost search a generalization)
- A graph with no weights can be considered to have edges of weight 1. In this case, BFS is optimal.
- BFS will find shallowest goal after expanding all shallower nodes (if branching factor is finite). Hence, BFS is complete.
- BFS is not very popular because time and space complexity are exponential: $O(b^{d+1})$ and $O(b^{d+1})$, respectively.
- Memory requirements of BFS are a bigger problem.

Depth-first Search (DFS)

Depth-first Search (DFS)

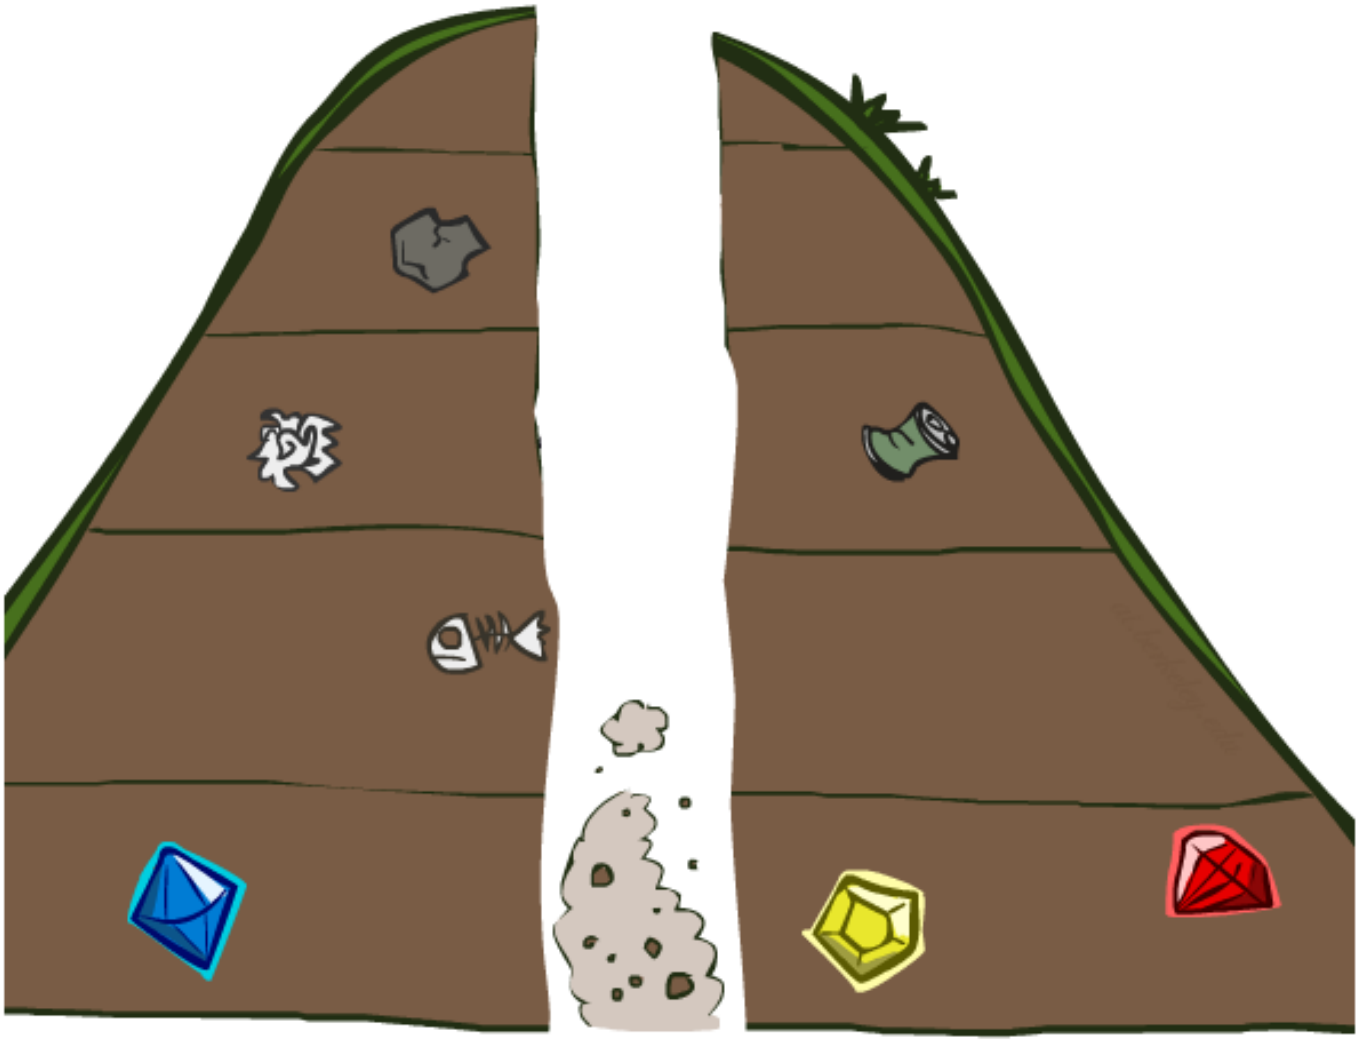

Strategy: Expand deepest unexpanded node

Implementation:
fringe = last-in first-out (LIFO), i.e., unvisited neighbors at front
F is a stack

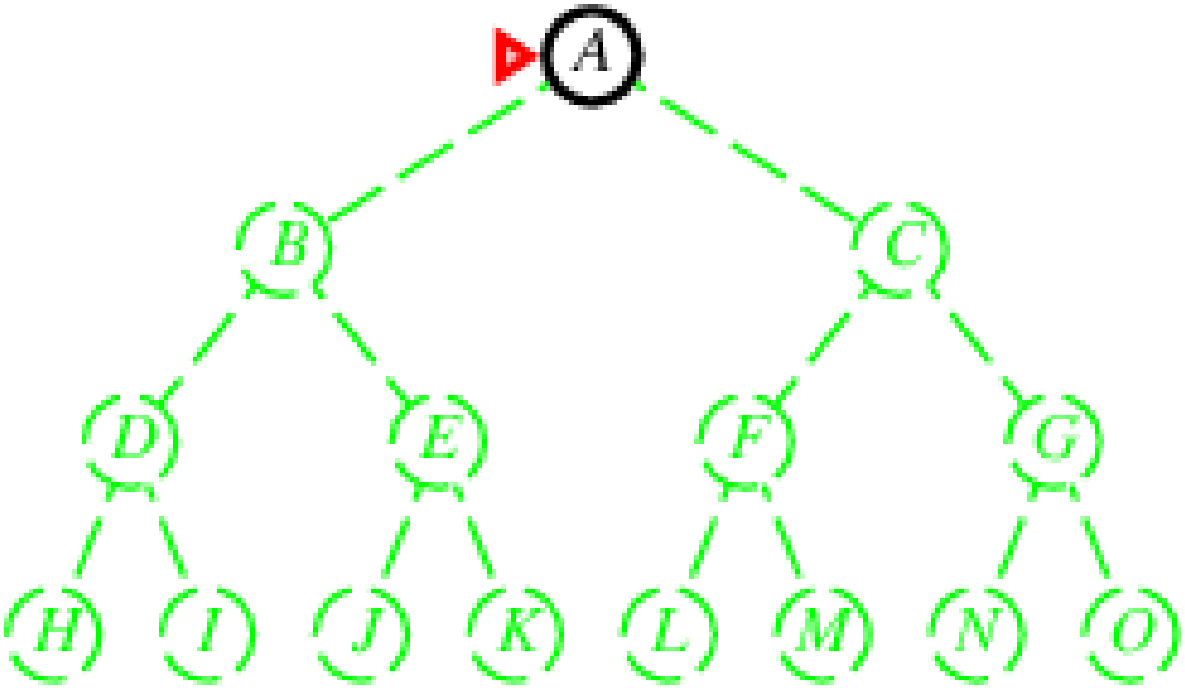

Strategy: Expand deepest unexpanded node

Implementation:
fringe = last-in first-out (LIFO), i.e., unvisited neighbors at front
F is a stack

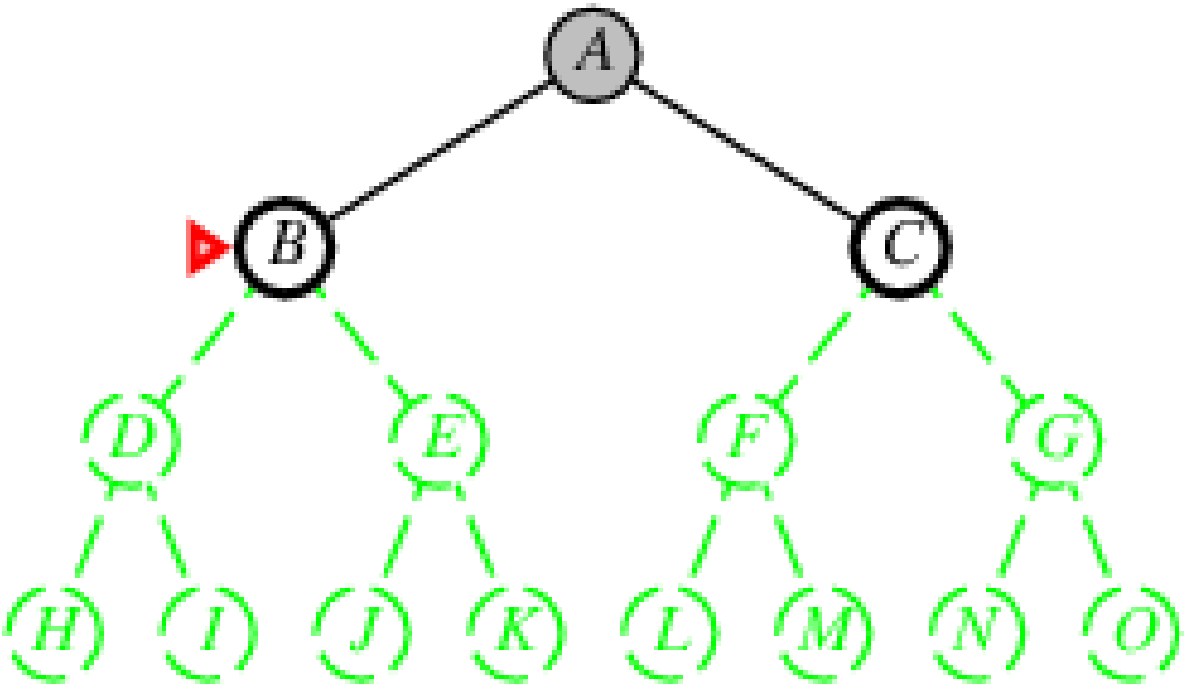

Strategy: Expand deepest unexpanded node

Implementation:
fringe = last-in first-out (LIFO), i.e., unvisited neighbors at front
F is a stack

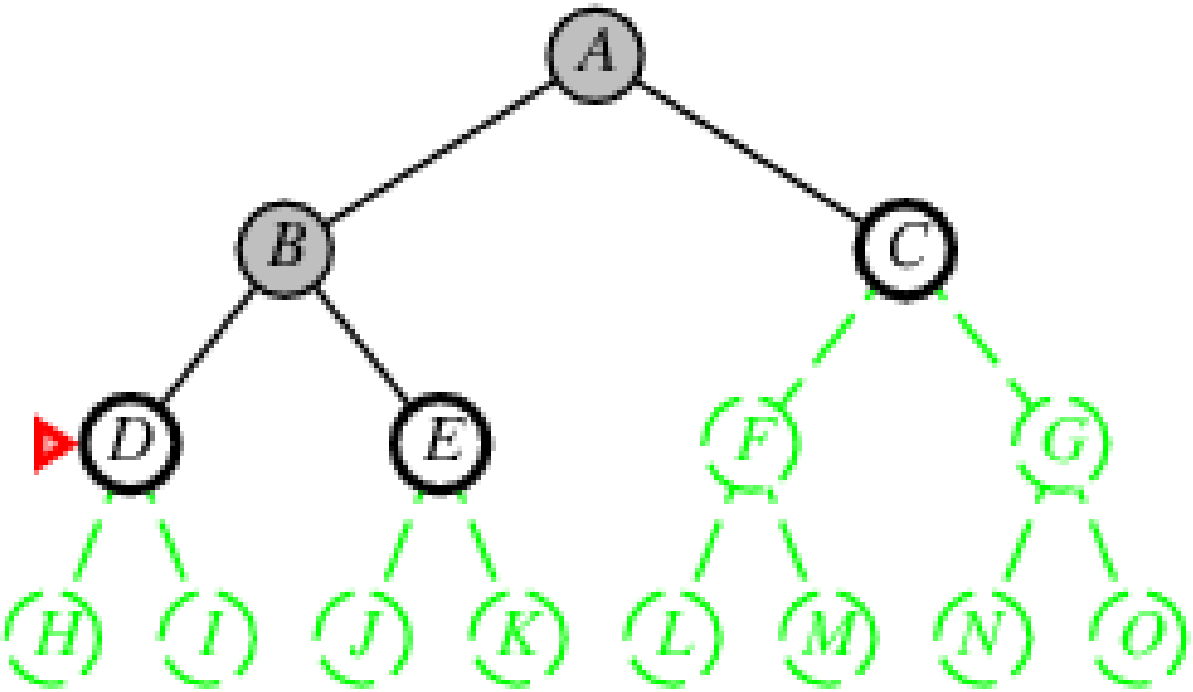

Strategy: Expand deepest unexpanded node

Implementation:
fringe = last-in first-out (LIFO), i.e., unvisited neighbors at front
F is a stack

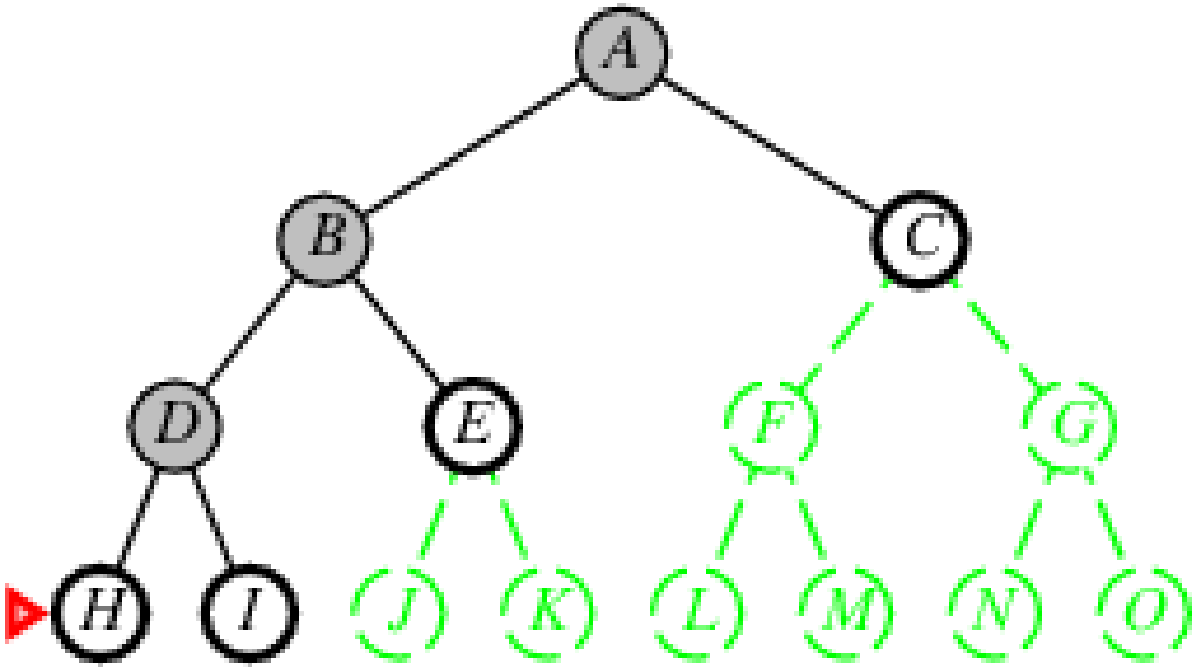

Strategy: Expand deepest unexpanded node

Implementation:
fringe = last-in first-out (LIFO), i.e., unvisited neighbors at front
F is a stack

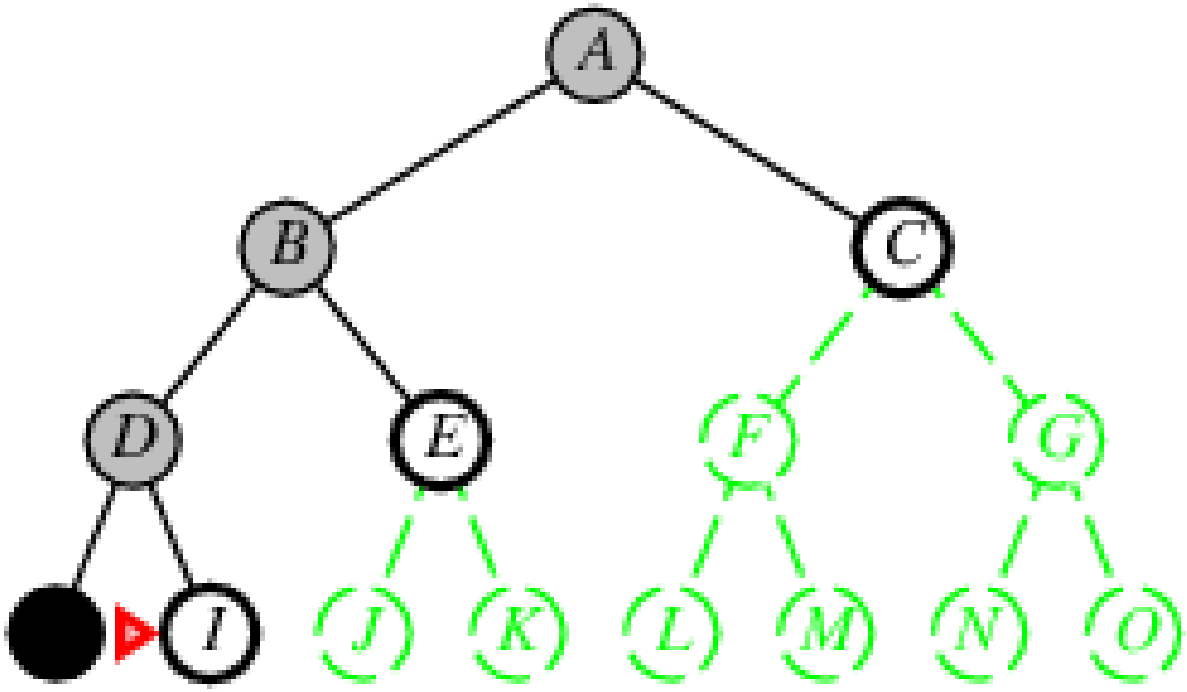

Strategy: Expand deepest unexpanded node

Implementation:
fringe = last-in first-out (LIFO), i.e., unvisited neighbors at front
F is a stack

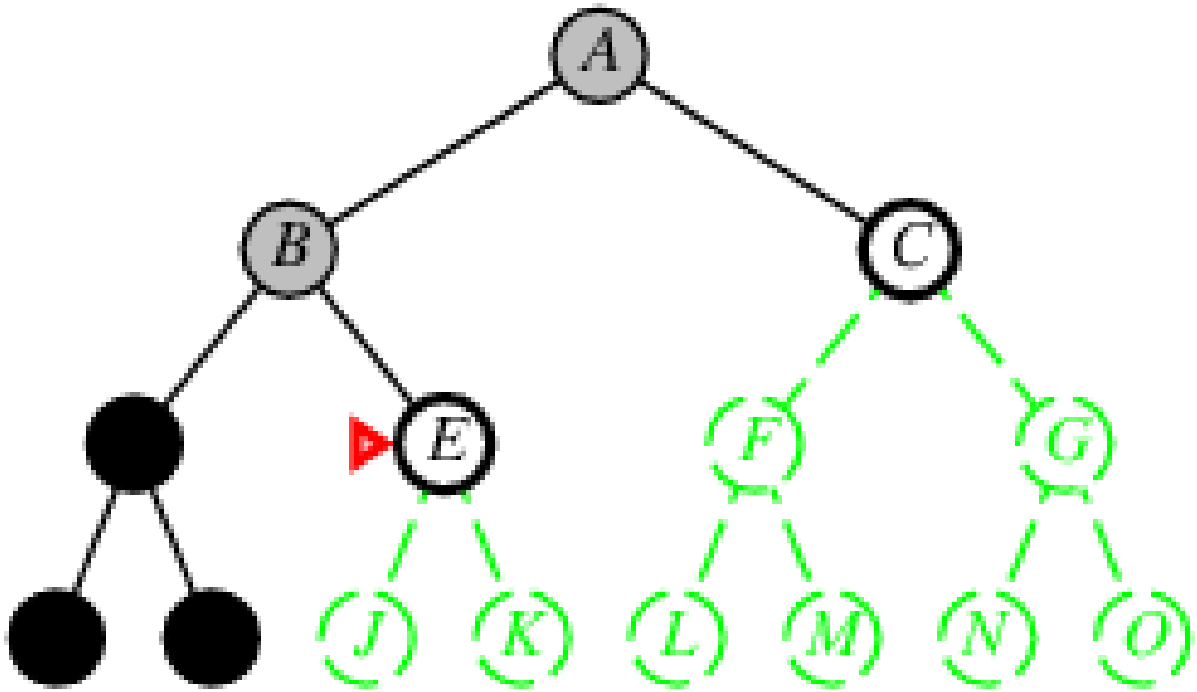

Strategy: Expand deepest unexpanded node

Implementation:
fringe = last-in first-out (LIFO), i.e., unvisited neighbors at front
F is a stack

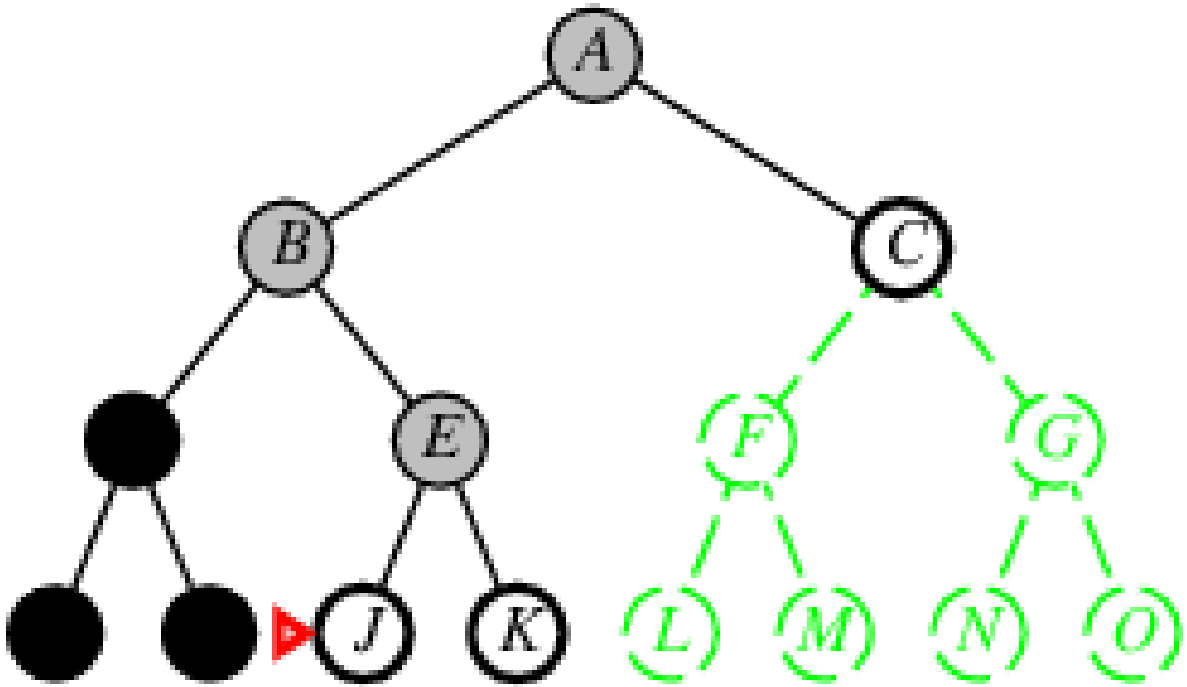

Strategy: Expand deepest unexpanded node

Implementation:
fringe = last-in first-out (LIFO), i.e., unvisited neighbors at front
F is a stack

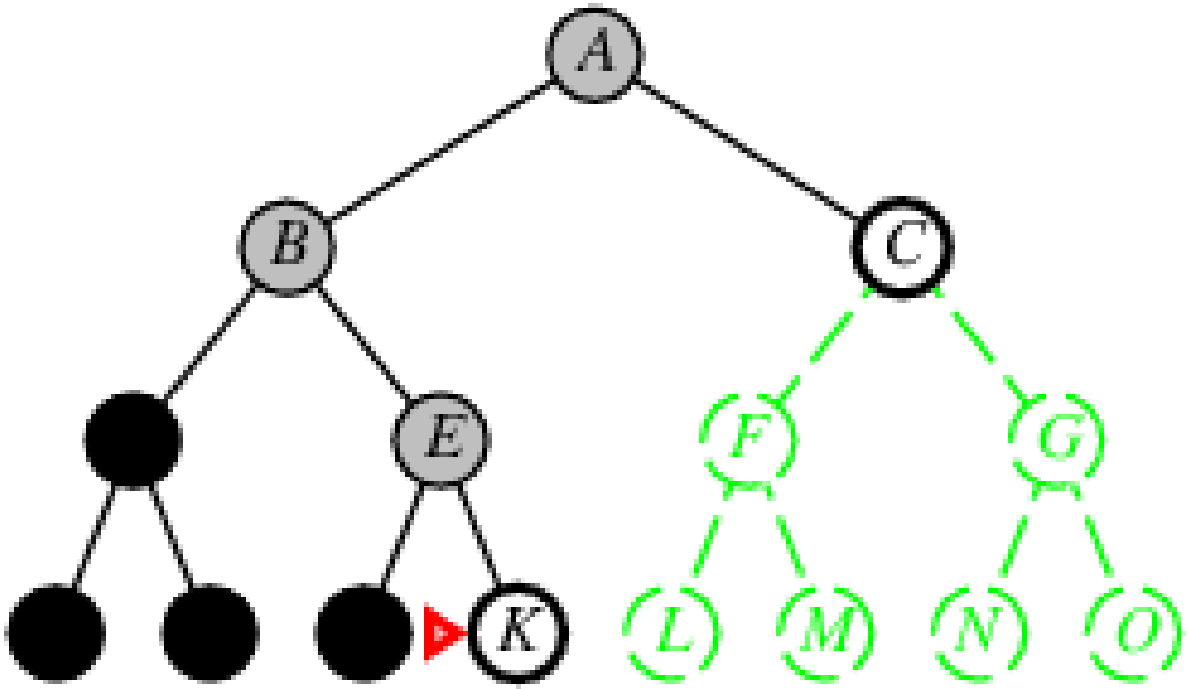

Strategy: Expand deepest unexpanded node

Implementation:
fringe = last-in first-out (LIFO), i.e., unvisited neighbors at front
F is a stack

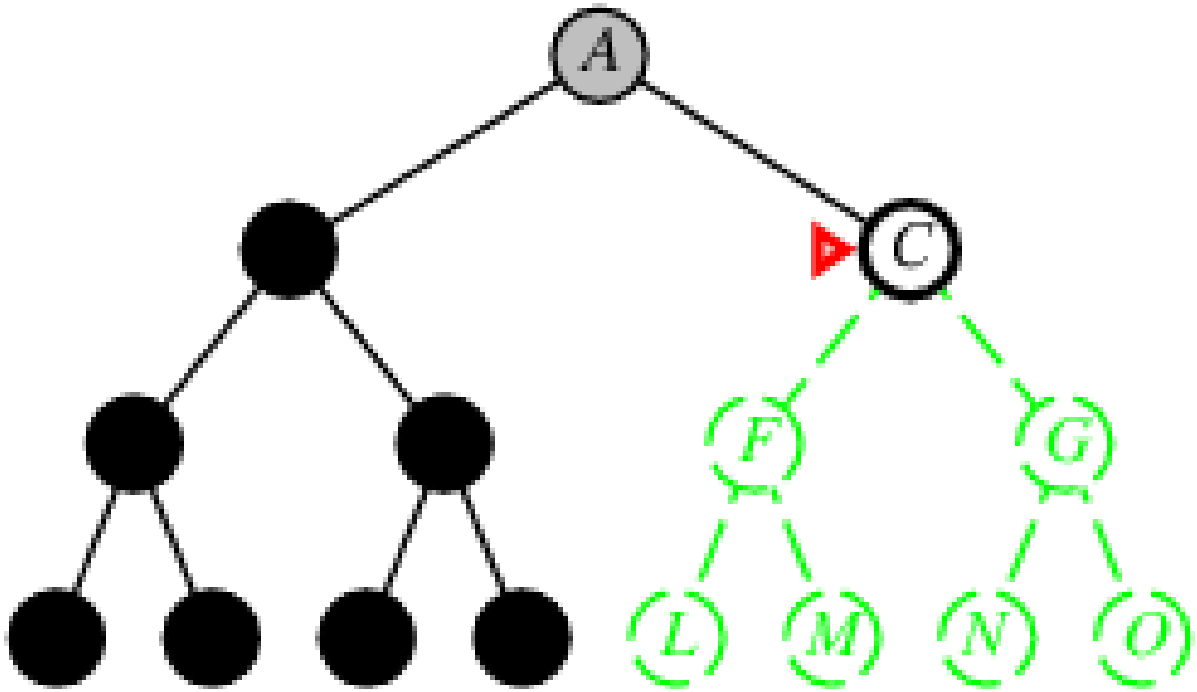

Strategy: Expand deepest unexpanded node

Implementation:
fringe = last-in first-out (LIFO), i.e., unvisited neighbors at front
F is a stack

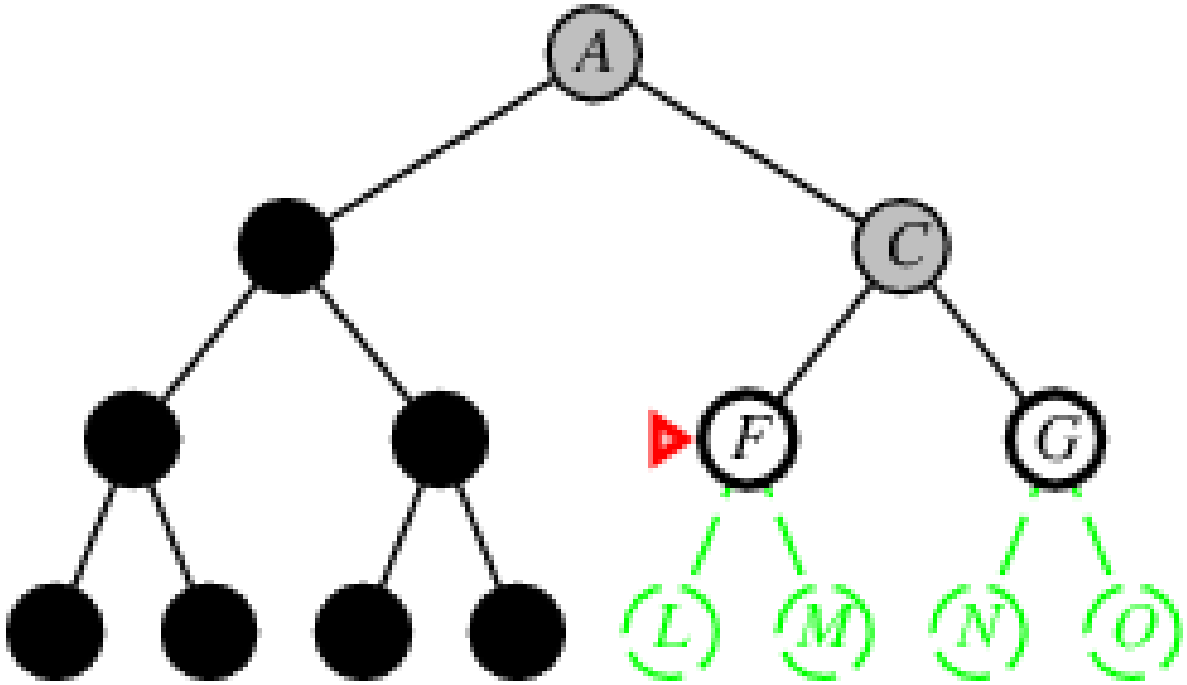

Strategy: Expand deepest unexpanded node

Implementation:
fringe = last-in first-out (LIFO), i.e., unvisited neighbors at front
F is a stack

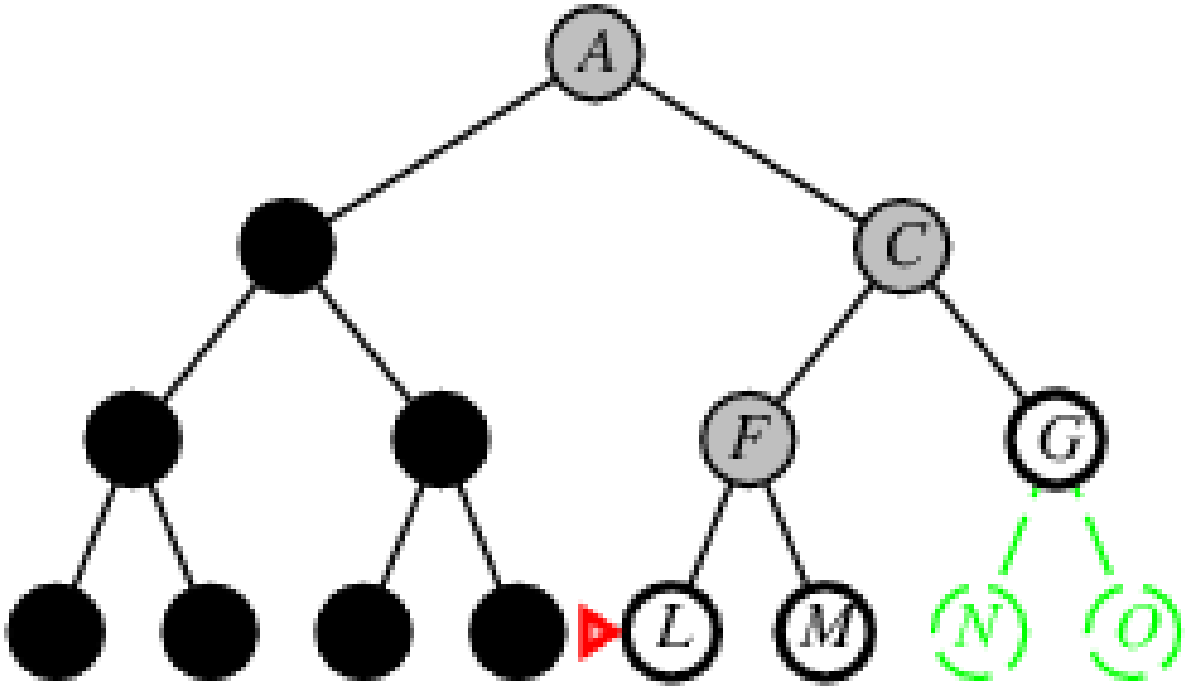

Strategy: Expand deepest unexpanded node

Implementation:
fringe = last-in first-out (LIFO), i.e., unvisited neighbors at front
F is a stack

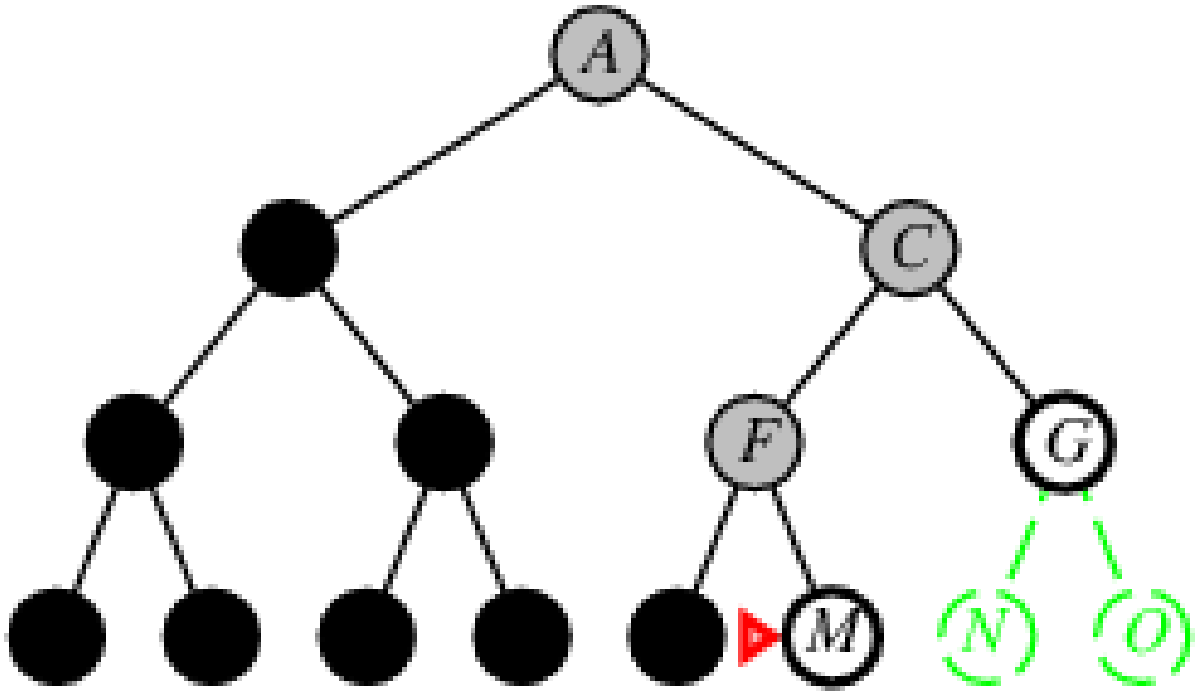

Depth-first Search (DFS)

F: search data structure (fringe)

F is a stack (LIFO) in DFS!

parent array: stores "edge comes from" to record visited states

```
F.insert(v)
parent[v] ← true
while not F.isEmpty do
    u ← F.extract()
    if isGoal(u) then
        return true
    for each v in outEdges(u) do
        if no parent[v] then
            F.insert(v)
            parent[v] ← u
```

Running Time?

Depth-first Search (DFS)

F: search data structure (fringe)

F is a stack (LIFO) in DFS!

parent array: stores "edge comes from" to record visited states

```
F.insert(v)
parent[v] ← true
while not F.isEmpty do
    u ← F.extract()
    if isGoal(u) then
        return true
    for each v in outEdges(u) do
        if no parent[v] then
            F.insert(v)
            parent[v] ← u
```

Running Time?

Let V and E be vertices and edges in search tree

Depth-first Search (DFS)

F: search data structure (fringe)

F is a stack (LIFO) in DFS!

parent array: stores "edge comes from" to record visited states

```
F.insert(v)
parent[v] ← true
while not F.isEmpty do
    u ← F.extract()
    if isGoal(u) then
        return true
    for each v in outEdges(u) do
        if no parent[v] then
            F.insert(v)
            parent[v] ← u
```

Running Time?

Let V and E be vertices and edges in search tree

$O(|V| + |E|)$

Depth-first Search (DFS)

F: search data structure (fringe)

F is a stack (LIFO) in DFS!

parent array: stores "edge comes from" to record visited states

```
F.insert(v)
parent[v] ← true
while not F.isEmpty do
    u ← F.extract()
    if isGoal(u) then
        return true
    for each v in outEdges(u) do
        if no parent[v] then
            F.insert(v)
            parent[v] ← u
```

Running Time?

Let V and E be vertices and edges in search tree

$O(|V| + |E|)$

What about in terms of b and m?

Depth-first Search (DFS)

F: search data structure (fringe)

F is a stack (LIFO) in DFS!

parent array: stores "edge comes from" to record visited states

```
F.insert(v)
parent[v] ← true
while not F.isEmpty do
    u ← F.extract()
    if isGoal(u) then
        return true
    for each v in outEdges(u) do
        if no parent[v] then
            F.insert(v)
            parent[v] ← u
```

Running Time?

Let V and E be vertices and edges in search tree

$O(|V| + |E|)$

What about in terms of b and m?

Properties of Depth-first Search (DFS)

Complete??

Properties of Depth-first Search (DFS)

Complete?? No: fails in infinite-depth spaces, spaces with loops

Modify to avoid repeated states along path

$\Rightarrow$ complete in finite spaces

Properties of Depth-first Search (DFS)

Complete?? No: fails in infinite-depth spaces, spaces with loops

Modify to avoid repeated states along path

$\Rightarrow$ complete in finite spaces

Time??

Properties of Depth-first Search (DFS)

Complete?? No: fails in infinite-depth spaces, spaces with loops

Modify to avoid repeated states along path

$\Rightarrow$ complete in finite spaces

Time?? $O(b^m)$: terrible if m is much larger than d

but if solutions are dense, may be much faster than BFS

Properties of Depth-first Search (DFS)

Complete?? No: fails in infinite-depth spaces, spaces with loops

Modify to avoid repeated states along path

$\Rightarrow$ complete in finite spaces

Time?? $O(b^m)$: terrible if m is much larger than d

but if solutions are dense, may be much faster than BFS

Space??

Properties of Depth-first Search (DFS)

Complete?? No: fails in infinite-depth spaces, spaces with loops

Modify to avoid repeated states along path

$\Rightarrow$ complete in finite spaces

Time?? $O(b^m)$: terrible if m is much larger than d

but if solutions are dense, may be much faster than BFS

Space?? $O(bm)$, i.e., linear space!

Properties of Depth-first Search (DFS)

Complete?? No: fails in infinite-depth spaces, spaces with loops

Modify to avoid repeated states along path

$\Rightarrow$ complete in finite spaces

Time?? $O(b^m)$: terrible if m is much larger than d

but if solutions are dense, may be much faster than BFS

Space?? $O(bm)$, i.e., linear space!

Optimal??

Properties of Depth-first Search (DFS)

Complete?? No: fails in infinite-depth spaces, spaces with loops

Modify to avoid repeated states along path

$\Rightarrow$ complete in finite spaces

Time?? $O(b^m)$: terrible if m is much larger than d

but if solutions are dense, may be much faster than BFS

Space?? $O(bm)$, i.e., linear space!

Optimal?? No

Properties of Depth-first Search (DFS)

Complete?? No: fails in infinite-depth spaces, spaces with loops

Modify to avoid repeated states along path

$\Rightarrow$ complete in finite spaces

Time?? $O(b^m)$: terrible if m is much larger than d

but if solutions are dense, may be much faster than BFS

Space?? $O(bm)$, i.e., linear space!

Optimal?? No

Why?

Properties of Depth-first Search (DFS)

Complete?? No: fails in infinite-depth spaces, spaces with loops

Modify to avoid repeated states along path

$\Rightarrow$ complete in finite spaces

Time?? $O(b^m)$: terrible if m is much larger than d

but if solutions are dense, may be much faster than BFS

Space?? $O(bm)$, i.e., linear space!

Optimal?? No Why?

DFS Summary

Basic Behavior:

- Expands the deepest node in the tree
- Backtracks when reaches a non-goal node with no descendants

Problems:

- Make a wrong choice and can go down along an infinite path even though the solution may be very close to initial vertex
- Hence, DFS is not optimal

DFS Summary

Basic Behavior:

- Expands the deepest node in the tree
- Backtracks when reaches a non-goal node with no descendants

Problems:

- Make a wrong choice and can go down along an infinite path even though the solution may be very close to initial vertex
- Hence, DFS is not optimal
- If subtree is of unbounded depth and contains no solutions, DFS will never terminate.

DFS Summary

Basic Behavior:

- Expands the deepest node in the tree
- Backtracks when reaches a non-goal node with no descendants

Problems:

- Make a wrong choice and can go down along an infinite path even though the solution may be very close to initial vertex
- Hence, DFS is not optimal
- If subtree is of unbounded depth and contains no solutions, DFS will never terminate.
- Hence, DFS is not complete

DFS Summary

Basic Behavior:

- Expands the deepest node in the tree
- Backtracks when reaches a non-goal node with no descendants

Problems:

- Make a wrong choice and can go down along an infinite path even though the solution may be very close to initial vertex
- Hence, DFS is not optimal
- If subtree is of unbounded depth and contains no solutions, DFS will never terminate.
- Hence, DFS is not complete
- Let b be the maximum number of neighbors of any node (known as branching factor), d be depth of shallowest goal, and m be maximum length of any path in the search tree

DFS Summary

Basic Behavior:

- Expands the deepest node in the tree
- Backtracks when reaches a non-goal node with no descendants

Problems:

- Make a wrong choice and can go down along an infinite path even though the solution may be very close to initial vertex
- Hence, DFS is not optimal
- If subtree is of unbounded depth and contains no solutions, DFS will never terminate.
- Hence, DFS is not complete
- Let b be the maximum number of neighbors of any node (known as branching factor), d be depth of shallowest goal, and m be maximum length of any path in the search tree
- Time complexity is $O(b^m)$ and space complexity is $O(b \cdot m)$

DFS Summary

Basic Behavior:

- Expands the deepest node in the tree
- Backtracks when reaches a non-goal node with no descendants

Problems:

- Make a wrong choice and can go down along an infinite path even though the solution may be very close to initial vertex
- Hence, DFS is not optimal
- If subtree is of unbounded depth and contains no solutions, DFS will never terminate.
- Hence, DFS is not complete
- Let b be the maximum number of neighbors of any node (known as branching factor), d be depth of shallowest goal, and m be maximum length of any path in the search tree
- Time complexity is $O(b^m)$ and space complexity is $O(b \cdot m)$

BFS vs. DFS

- When will BFS outperform DFS?
- When will DFS outperform BFS?

Another Advantage of DFS

```
RecursiveDFS(v)
  if v is unmarked then
      mark v
      for each edge v, u do
          RecursiveDFS(u)
```

Color arrays can be kept to indicate that a vertex is undiscovered, the first time it is discovered, when its neighbors are in the process of being considered, and when all its neighbors have been considered.

DFS can be used to timestamp vertices with when they are discovered and when they are finished. These start and finish times are useful in various applications of DFS regarding constraint satisfaction.

Depth-limited Search (DLS)

- Problem with DFS is presence of infinite paths
- DLS limits the depth of a path in search tree of DFS
- Modifies *DFS* by using a predetermined depth limit $\mathrm{d_l}$
- DLS is incomplete if the shallowest goal is beyond the depth limit d_l
- DLS is not optimal if $d < d_l$
- Time complexity is $O(b^{d_l})$ and space complexity is $O(b \cdot d_l)$

Depth-limited Search (DLS)

= DFS with depth limit d_l [i.e., nodes at depth d_l are not expanded]

Recursive implementation:

```
function DEPTH-LIMITED-SEARCH( problem, limit) returns soln/fail/cutoff
    RECURSIVE-DLS(MAKE-NODE(INITIAL-STATE[problem]), problem, limit)

function RECURSIVE-DLS(node, problem, limit) returns soln/fail/cutoff
    cutoff-occurred? ← false
    if GOAL-TEST(problem, STATE[node]) then return node
    else if DEPTH[node] = limit then return cutoff
    else for each successor in EXPAND(node, problem) do
        result ← RECURSIVE-DLS(successor, problem, limit)
        if result = cutoff then cutoff-occurred? ← true
        else if result ≠ failure then return result
    if cutoff-occurred? then return cutoff else return failure
```

Iterative Deepening Search (IDS)

- Finds the best depth limit by incrementing d_l until goal is found at $d_l = d$
- Can be viewed as running DLS with consecutive values of d_l
- IDS combines the benefits of both DFS and BFS
- Like DFS, its space complexity is $O(b \cdot d)$
- Like BFS, it is complete when the branching factor is finite, and it is optimal if the path cost is a non-decreasing function of the depth of the goal node
- Its time complexity is $O(b^d)$
- IDS is the preferred uninformed search when the state space is large, and the depth of the solution is not known

Iterative Deepening Search (IDS)

```
function ITERATIVE-DEEPENING-SEARCH( problem) returns a solution
    inputs: problem, a problem

    for depth ← 0 to ∞ do
        result ← DEPTH-LIMITED-SEARCH( problem, depth)
        if result ≠ cutoff then return result
    end
```

Iterative Deepening Search (IDS) @ $d_l = 0$

Limit = 0

Iterative Deepening Search (IDS) @ $d_l = 1$

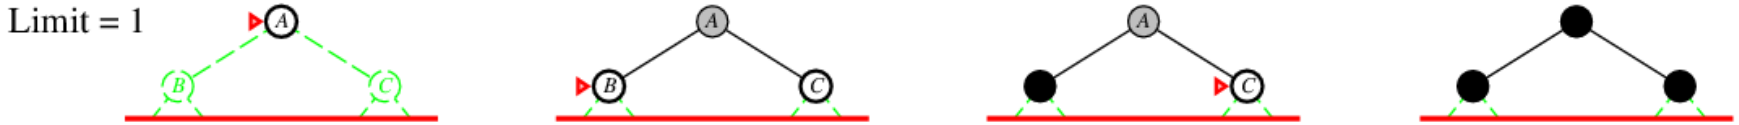

Iterative Deepening Search (IDS) @ $d_l = 2$

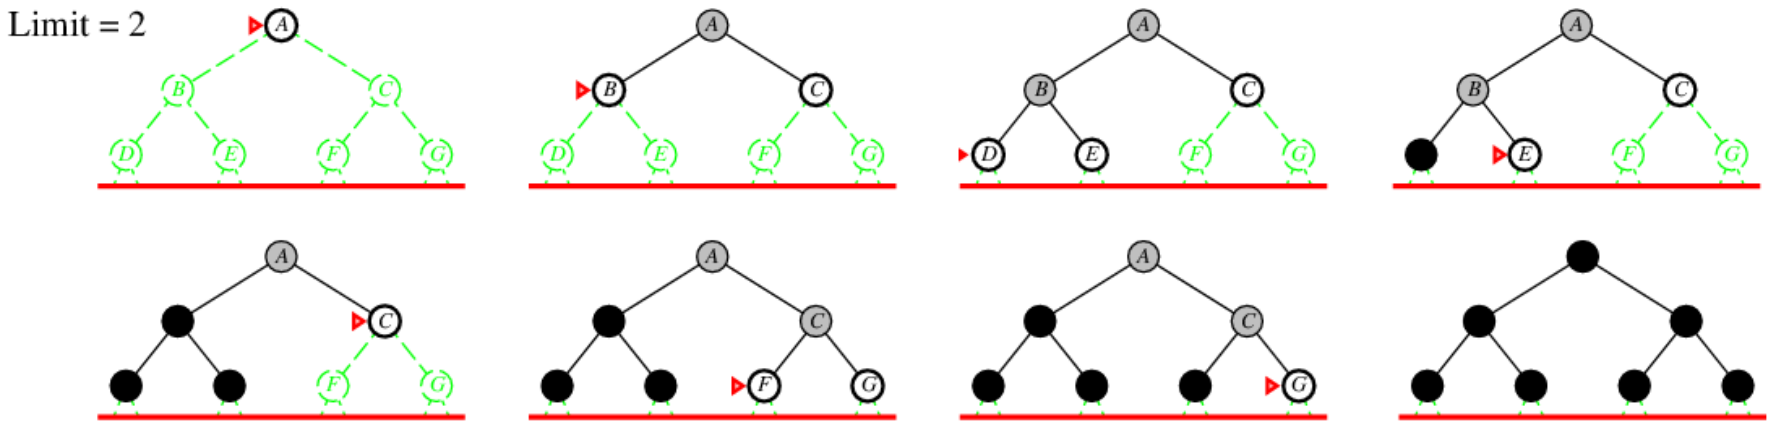

Iterative Deepening Search (IDS) @ $d_l = 3$

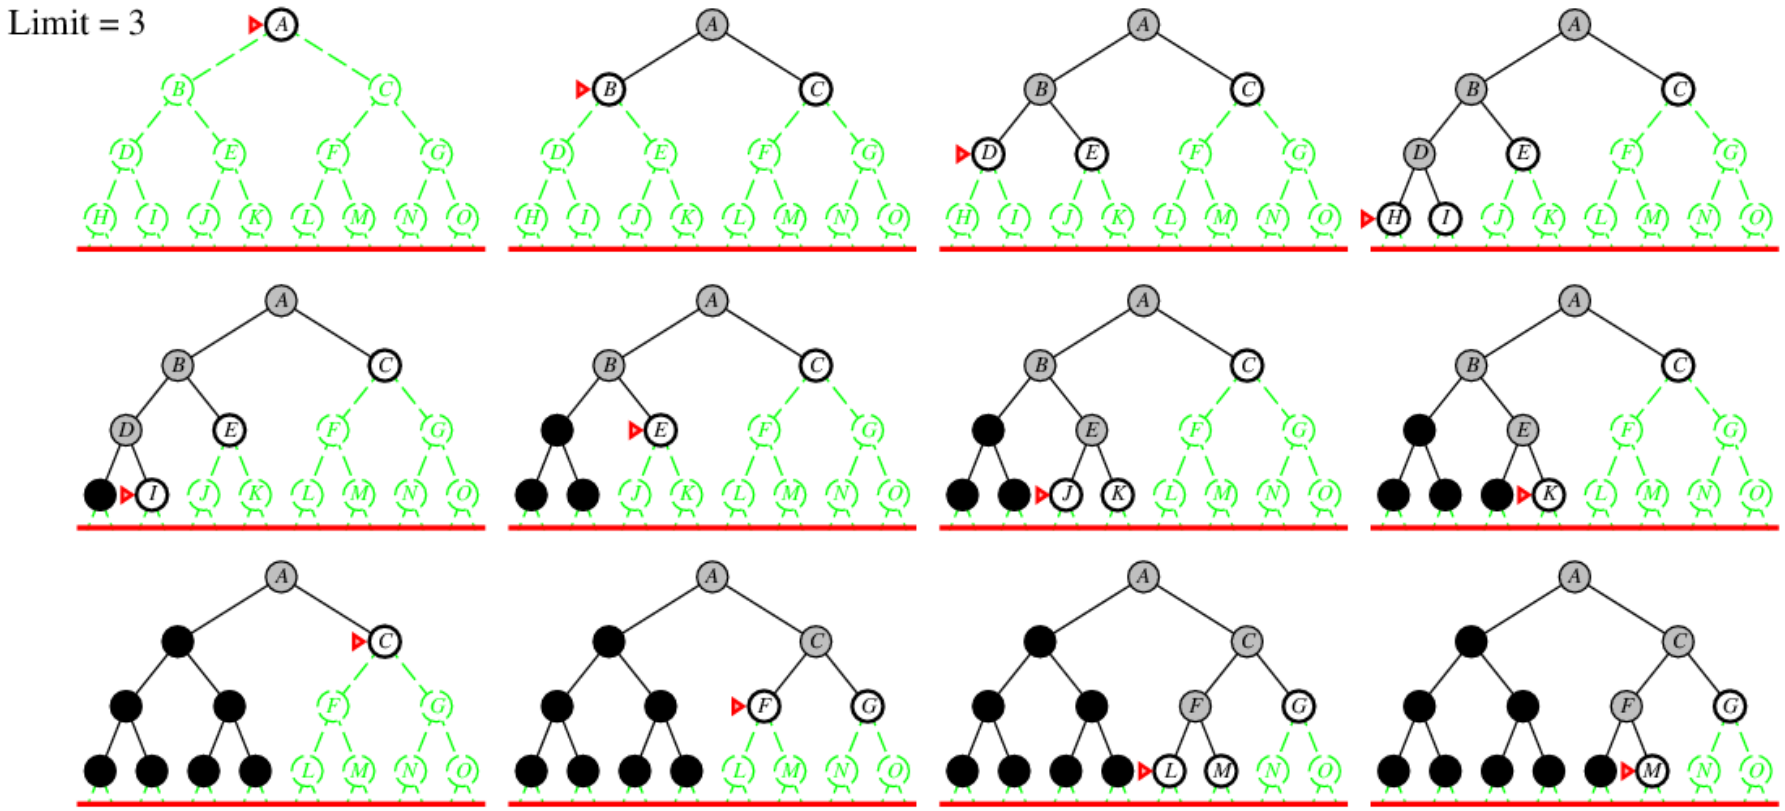

Summary of Uninformed Search Algorithms

Criterion	Breadth-First	Depth-First	Depth-Limited	Iterative Deepening
Complete?	Yes*	No	Yes, if $d_l \geq d$	Yes
Time	b^{d+1}	b^m	b^{d_l}	b^d
Space	b^{d+1}	bm	bd_l	bd
Optimal?	Yes*	No	No	Yes*

Uninformed Search Summary

- Problem formulation usually requires abstracting away real-world details to define a state space that can feasibly be explored
- Variety of uninformed search strategies
- IDS uses only linear space and not much more time than other uninformed algorithms
- What about least-cost paths on weighted graphs?
  - That is the subject of next lecture