

Problem solving and search: Chapter 3, Sections 1–5

Z. Duric

GMU

CS 480

2

Outline

- ◇ Problem-solving agents
- ◇ Problem types
- ◇ Problem formulation
- ◇ Example problems
- ◇ Basic search algorithms

Z. Duric

GMU

Problem-solving agents

Restricted form of general agent:

Z. Duric

GMU

CS 480

4

```
function SIMPLE-PROBLEM-SOLVING-AGENT(percept) returns an action
static: seq, an action sequence, initially empty
         state, some description of the current world state
         goal, a goal, initially null
         problem, a problem formulation

state ← UPDATE-STATE(state, percept)
if seq is empty then
    goal ← FORMULATE-GOAL(state)
    problem ← FORMULATE-PROBLEM(state, goal)
    seq ← SEARCH(problem)
action ← RECOMMENDATION(seq, state)
seq ← REMAINDER(seq, state)
return action
```

Note: this is *offline* problem solving; solution executed “eyes closed.”

Online problem solving involves acting without complete knowledge.

Z. Duric

GMU

Example: Romania

On holiday in Romania; currently in Arad.

Flight leaves tomorrow from Bucharest

Formulate goal:

be in Bucharest

Formulate problem:

states: various cities

actions: drive between cities

Find solution:

sequence of cities, e.g., Arad, Sibiu, Fagaras, Bucharest


Z. Duric

GMU

CS 480

6

Example: Romania

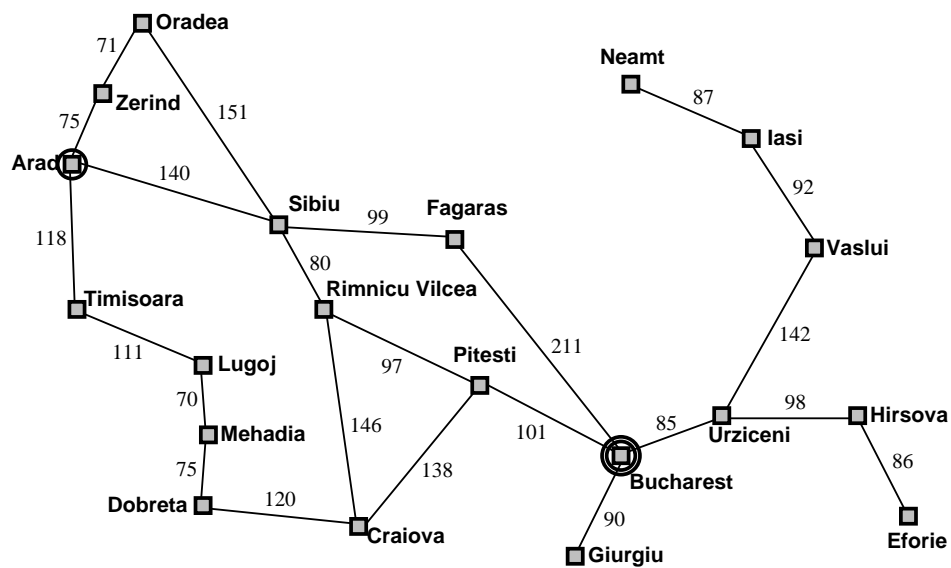

Z. Duric

GMU

Problem types

Deterministic, fully observable \implies *single-state problem*

Agent knows exactly which state it will be in; solution is a sequence

Non-observable \implies *conformant problem*

Agent may have no idea where it is; solution (if any) is a sequence

Nondeterministic and/or partially observable \implies *contingency problem*

percepts provide *new* information about current state


solution is a *tree* or *policy*

often *interleave* search, execution

Unknown state space \implies *exploration problem* (“online”)

Example: vacuum world

Single-state, start in #5. Solution??




Example: vacuum world

Single-state, start in #5. Solution??

[*Right, Suck*]

Conformant, start in {1, 2, 3, 4, 5, 6, 7, 8}

e.g., *Right* goes to {2, 4, 6, 8}. Solution??

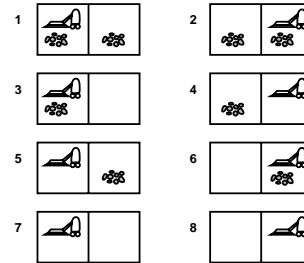

Example: vacuum world

Single-state, start in #5. Solution??

[*Right, Suck*]

Conformant, start in {1, 2, 3, 4, 5, 6, 7, 8}

e.g., *Right* goes to {2, 4, 6, 8}. Solution??


[*Right, Suck, Left, Suck*]

Contingency, start in #5

Murphy's Law: *Suck* can dirty a clean carpet

Local sensing: dirt, location only.

Solution??



Example: vacuum world

Single-state, start in #5. Solution??

[Right, Suck]

Conformant, start in {1, 2, 3, 4, 5, 6, 7, 8}

e.g., Right goes to {2, 4, 6, 8}. Solution??

[Right, Suck, Left, Suck]


Contingency, start in #5

Murphy's Law: Suck can dirty a clean carpet

Local sensing: dirt, location only.

Solution??

[Right, if dirt then Suck]



Single-state problem formulation

A *problem* is defined by four items:

initial state e.g., “at Arad”

successor function $S(x)$ = set of action–state pairs

e.g., $S(\text{Arad}) = \{ \langle \text{Arad} \rightarrow \text{Zerind}, \text{Zerind} \rangle, \dots \}$

goal test, can be

explicit, e.g., x = “at Bucharest”

implicit, e.g., $\text{NoDirt}(x)$

path cost (additive)

e.g., sum of distances, number of actions executed, etc.

$c(x, a, y)$ is the **step cost**, assumed to be ≥ 0

A *solution* is a sequence of actions

leading from the initial state to a goal state

Selecting a state space

Real world is absurdly complex

⇒ state space must be *abstracted* for problem solving

(Abstract) state = set of real states

(Abstract) action = complex combination of real actions

e.g., “Arad → Zerind” represents a complex set of possible routes, detours, rest stops, etc.

For guaranteed realizability, *any* real state “in Arad”

must get to *some* real state “in Zerind”

(Abstract) solution =

set of real paths that are solutions in the real world

Each abstract action should be “easier” than the original problem!


Z. Duric

GMU

CS 480

14

Example: vacuum world state space graph

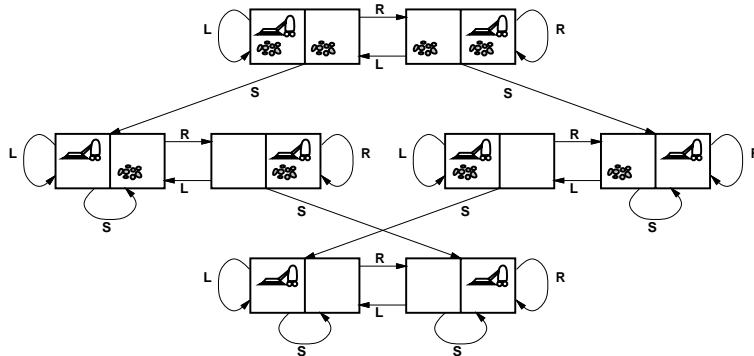

states??

actions??


goal test??

path cost??

Z. Duric

GMU

Example: vacuum world state space graph

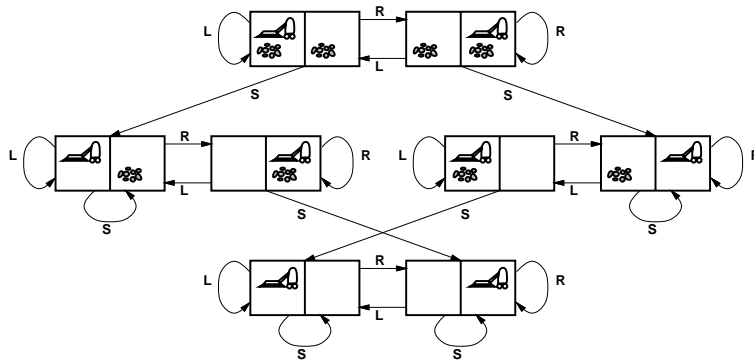

states??: integer dirt and robot locations (ignore dirt *amounts*)

actions??: *Left, Right, Suck, NoOp*

goal test??: no dirt

path cost??: 1 per action (0 for *NoOp*)


Z. Duric

GMU

CS 480

16

Example: The 8-puzzle

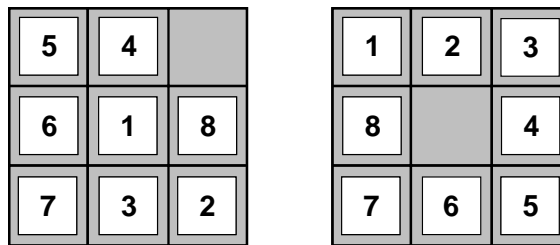

Start State

Goal State

states??

actions??

goal test??

path cost??

Z. Duric

GMU

Example: The 8-puzzle

5	4	
6	1	8
7	3	2

Start State

1	2	3
8		4
7	6	5

Goal State

states??: integer locations of tiles (ignore intermediate positions)


actions??: move blank left, right, up, down (ignore unjamming etc.)

goal test??: = goal state (given)

path cost??: 1 per move

[Note: optimal solution of n -Puzzle family is NP-hard]

Example: robotic assembly

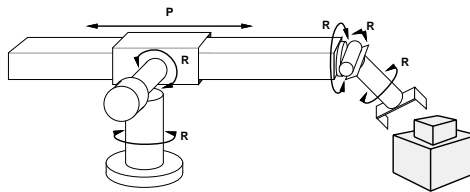

states??: real-valued coordinates of
robot joint angles
parts of the object to be assembled

actions??: continuous motions of robot joints

goal test??: complete assembly *with no robot included!*

path cost??: time to execute

Tree search algorithms

Basic idea:

offline, simulated exploration of state space
by generating successors of already-explored states
(a.k.a. *expanding* states)

```
function TREE-SEARCH(problem, strategy) returns a solution, or failure
  initialize the search tree using the initial state of problem
  loop do
    if there are no candidates for expansion then return failure
    choose a leaf node for expansion according to strategy
    if the node contains a goal state then return the corresponding solution
    else expand the node and add the resulting nodes to the search tree
  end
```


Z. Duric

GMU

CS 480

20


Tree search example

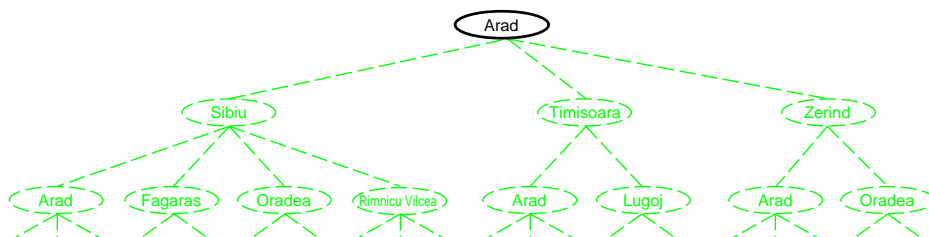

Z. Duric

GMU

Tree search example

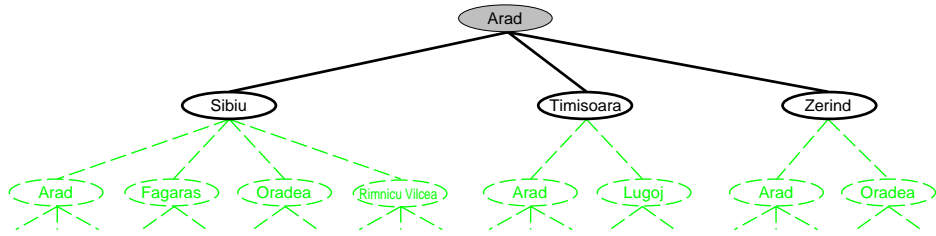


Z. Duric

GMU

CS 480

22

Tree search example

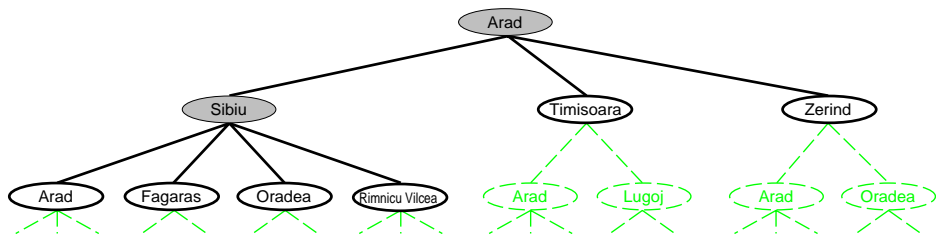

Z. Duric

GMU


Implementation: states vs. nodes

A *state* is a (representation of) a physical configuration

A *node* is a data structure constituting part of a search tree

includes *parent*, *children*, *depth*, *path cost* $g(x)$

States do not have parents, children, depth, or path cost!

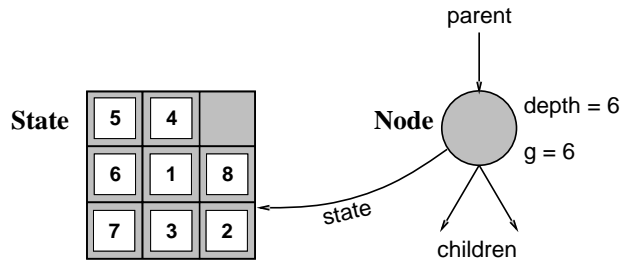

The EXPAND function creates new nodes, filling in the various fields and using the SUCCESSORFN of the problem to create the corresponding states.

Implementation: general tree search

function TREE-SEARCH(*problem*, *fringe*) **returns** a solution, or failure

fringe ← INSERT(MAKE-NODE(INITIAL-STATE[*problem*]), *fringe*)

loop do

if *fringe* is empty **then return** failure

node ← REMOVE-FRONT(*fringe*)

if GOAL-TEST[*problem*] applied to STATE(*node*) succeeds **return** *node*

fringe ← INSERTALL(EXPAND(*node*, *problem*), *fringe*)

function EXPAND(*node*, *problem*) **returns** a set of nodes

successors ← the empty set

for each *action*, *result* **in** SUCCESSOR-FN[*problem*](STATE[*node*]) **do**

s ← a new NODE

 PARENT-NODE[*s*] ← *node*; ACTION[*s*] ← *action*; STATE[*s*] ← *result*

 PATH-COST[*s*] ← PATH-COST[*node*] + STEP-COST(*node*, *action*, *s*)

 DEPTH[*s*] ← DEPTH[*node*] + 1

 add *s* to *successors*

return *successors*

Search strategies

A strategy is defined by picking the *order of node expansion*

Strategies are evaluated along the following dimensions:

completeness—does it always find a solution if one exists?

time complexity—number of nodes generated/expanded

space complexity—maximum number of nodes in memory

optimality—does it always find a least-cost solution?

Time and space complexity are measured in terms of

b —maximum branching factor of the search tree

d —depth of the least-cost solution

m —maximum depth of the state space (may be ∞)

Uninformed search strategies

Uninformed strategies use only the information available in the problem definition

Breadth-first search

Uniform-cost search

Depth-first search

Depth-limited search


Iterative deepening search

Breadth-first search

Expand shallowest unexpanded node

Implementation:

fringe is a FIFO queue, i.e., new successors go at end

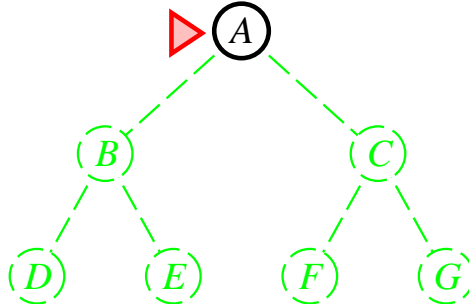

Z. Duric

GMU

CS 480


28

Breadth-first search

Expand shallowest unexpanded node

Implementation:

fringe is a FIFO queue, i.e., new successors go at end

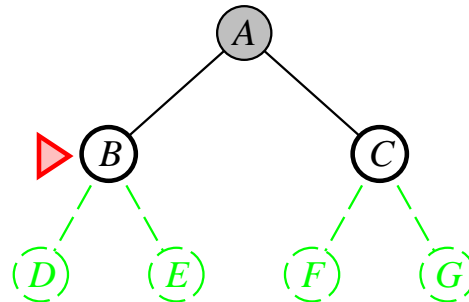

Z. Duric


GMU

Breadth-first search

Expand shallowest unexpanded node

Implementation:

fringe is a FIFO queue, i.e., new successors go at end

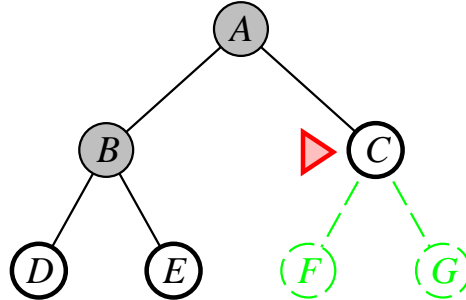

Z. Duric

GMU

CS 480


30

Breadth-first search

Expand shallowest unexpanded node

Implementation:

fringe is a FIFO queue, i.e., new successors go at end

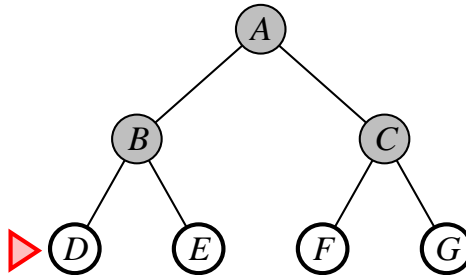

Z. Duric

GMU

Properties of breadth-first search

Complete??

Properties of breadth-first search

Complete?? Yes (if b is finite)

Time??

Properties of breadth-first search

Complete?? Yes (if b is finite)

Time?? $1 + b + b^2 + b^3 + \dots + b^d + b(b^d - 1) = O(b^{d+1})$, i.e., exp. in d

Space??

Properties of breadth-first search

Complete?? Yes (if b is finite)

Time?? $1 + b + b^2 + b^3 + \dots + b^d + b(b^d - 1) = O(b^{d+1})$, i.e., exp. in d

Space?? $O(b^{d+1})$ (keeps every node in memory)

Optimal??

Properties of breadth-first search

Complete?? Yes (if b is finite)

Time?? $1 + b + b^2 + b^3 + \dots + b^d + b(b^d - 1) = O(b^{d+1})$, i.e., exp. in d

Space?? $O(b^{d+1})$ (keeps every node in memory)

Optimal?? Yes (if cost = 1 per step); not optimal in general

Space is the big problem; can easily generate nodes at 10MB/sec
so 24hrs = 860GB.

Uniform-cost search

Expand least-cost unexpanded node

Implementation:

fringe = queue ordered by path cost

Equivalent to breadth-first if step costs all equal

Complete?? Yes, if step cost $\geq \epsilon$

Time?? # of nodes with $g \leq$ cost of optimal solution, $O(b^{\lceil C^*/\epsilon \rceil})$
where C^* is the cost of the optimal solution

Space?? # of nodes with $g \leq$ cost of optimal solution, $O(b^{\lceil C^*/\epsilon \rceil})$


Optimal?? Yes—nodes expanded in increasing order of $g(n)$

Depth-first search

Expand deepest unexpanded node

Implementation:

fringe = LIFO queue, i.e., put successors at front

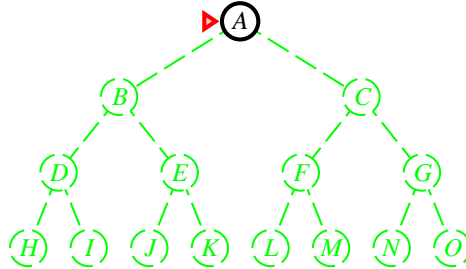


Depth-first search

Expand deepest unexpanded node

Implementation:

fringe = LIFO queue, i.e., put successors at front

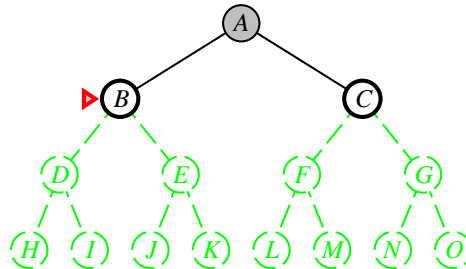


Depth-first search

Expand deepest unexpanded node

Implementation:

fringe = LIFO queue, i.e., put successors at front

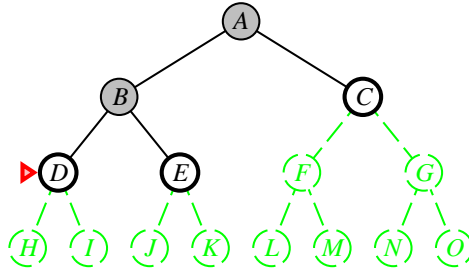

Z. Duric

GMU

CS 480


40

Depth-first search

Expand deepest unexpanded node

Implementation:

fringe = LIFO queue, i.e., put successors at front

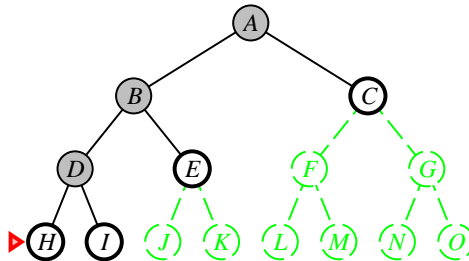

Z. Duric


GMU

Depth-first search

Expand deepest unexpanded node

Implementation:

fringe = LIFO queue, i.e., put successors at front

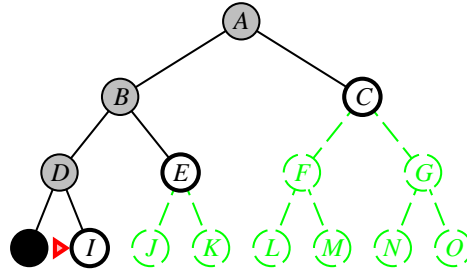

Z. Duric

GMU

CS 480


42

Depth-first search

Expand deepest unexpanded node

Implementation:

fringe = LIFO queue, i.e., put successors at front

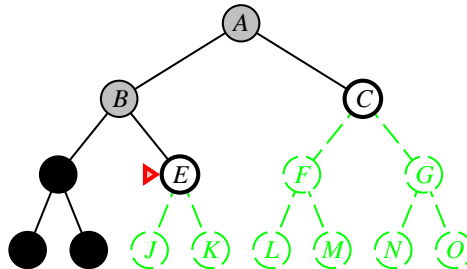

Z. Duric


GMU

Depth-first search

Expand deepest unexpanded node

Implementation:

fringe = LIFO queue, i.e., put successors at front

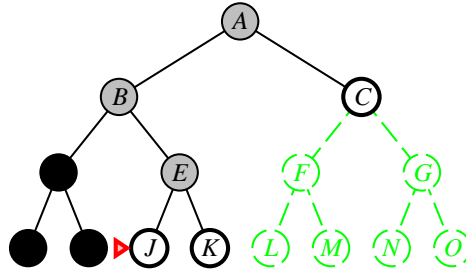


Depth-first search

Expand deepest unexpanded node

Implementation:

fringe = LIFO queue, i.e., put successors at front

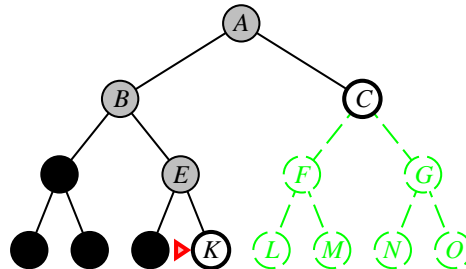


Depth-first search

Expand deepest unexpanded node

Implementation:

fringe = LIFO queue, i.e., put successors at front

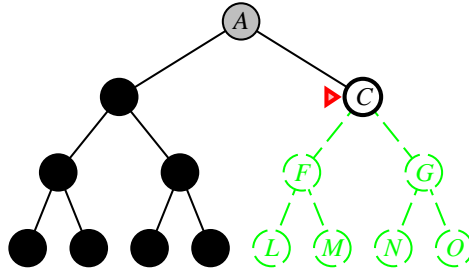

Z. Duric

GMU

CS 480


46

Depth-first search

Expand deepest unexpanded node

Implementation:

fringe = LIFO queue, i.e., put successors at front

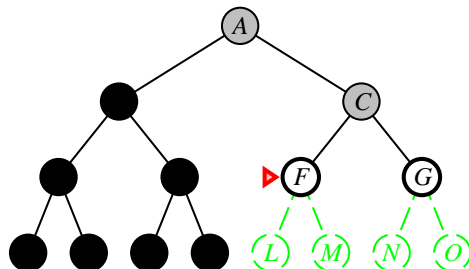

Z. Duric


GMU

Depth-first search

Expand deepest unexpanded node

Implementation:

fringe = LIFO queue, i.e., put successors at front

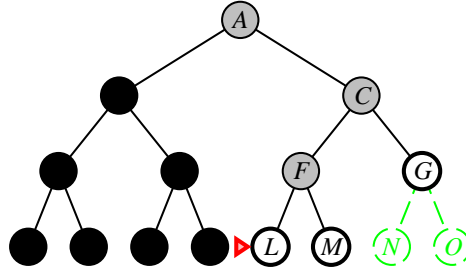

Z. Duric

GMU

CS 480


48

Depth-first search

Expand deepest unexpanded node

Implementation:

fringe = LIFO queue, i.e., put successors at front

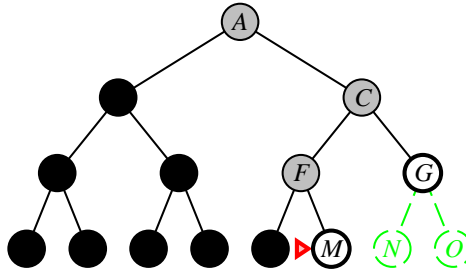

Z. Duric

GMU

Properties of depth-first search

Complete??

Properties of depth-first search

Complete?? No: fails in infinite-depth spaces, spaces with loops
Modify to avoid repeated states along path
⇒ complete in finite spaces

Time??

Properties of depth-first search

Complete?? No: fails in infinite-depth spaces, spaces with loops

Modify to avoid repeated states along path

⇒ complete in finite spaces

Time?? $O(b^m)$: terrible if m is much larger than d

but if solutions are dense, may be much faster than

breadth-first

Space??

Properties of depth-first search

Complete?? No: fails in infinite-depth spaces, spaces with loops

Modify to avoid repeated states along path

⇒ complete in finite spaces

Time?? $O(b^m)$: terrible if m is much larger than d

but if solutions are dense, may be much faster than

breadth-first

Space?? $O(bm)$, i.e., linear space!

Optimal??

Properties of depth-first search

Complete?? No: fails in infinite-depth spaces, spaces with loops

Modify to avoid repeated states along path

⇒ complete in finite spaces

Time?? $O(b^m)$: terrible if m is much larger than d

but if solutions are dense, may be much faster than
breadth-first

Space?? $O(bm)$, i.e., linear space!

Optimal?? No

Depth-limited search

= depth-first search with depth limit l ,

i.e., nodes at depth l have no successors

Recursive implementation:

```
function DEPTH-LIMITED-SEARCH(problem, limit) returns soln/fail/cutoff
  RECURSIVE-DLS(MAKE-NODE(INITIAL-STATE[problem]), problem, limit)

function RECURSIVE-DLS(node, problem, limit) returns soln/fail/cutoff
  cutoff-occurred? ← false
  if GOAL-TEST[problem](STATE[node]) then return node
  else if DEPTH[node] = limit then return cutoff
  else for each successor in EXPAND(node, problem) do
    result ← RECURSIVE-DLS(successor, problem, limit)
    if result = cutoff then cutoff-occurred? ← true
    else if result ≠ failure then return result
  if cutoff-occurred? then return cutoff else return failure
```

Iterative deepening search

```
function ITERATIVE-DEEPENING-SEARCH(problem) returns a solution sequence
  inputs: problem, a problem

  for depth  $\leftarrow$  0 to  $\infty$  do
    result  $\leftarrow$  DEPTH-LIMITED-SEARCH(problem, depth)
    if result  $\neq$  cutoff then return result
  end
```

Iterative deepening search $l = 0$

Limit = 0



Iterative deepening search $l = 1$

Limit = 1



Z. Duric


GMU

CS 480

58

Iterative deepening search $l = 2$

Limit = 2

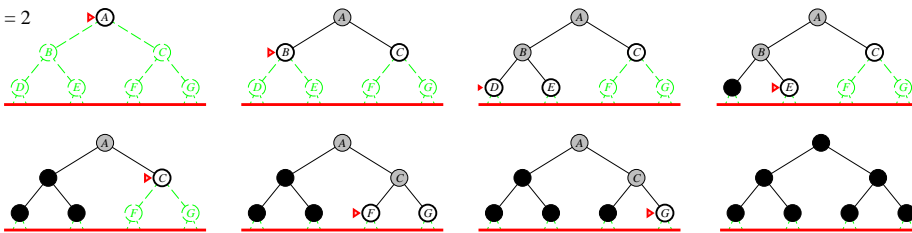


Z. Duric

GMU

Iterative deepening search $l = 3$

Limit = 3

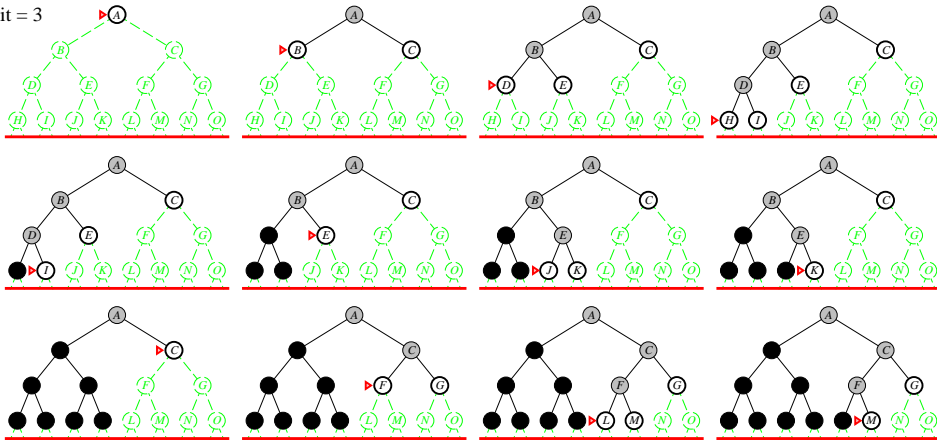

Z. Duric

GMU

CS 480

60

Properties of iterative deepening search

Complete??

Z. Duric

GMU

Properties of iterative deepening search

Complete?? Yes

Time??

Z. Duric

GMU

CS 480

62

Properties of iterative deepening search

Complete?? Yes

Time?? $(d + 1)b^0 + db^1 + (d - 1)b^2 + \dots + b^d = O(b^d)$

Space??

Z. Duric

GMU

Properties of iterative deepening search

Complete?? Yes

Time?? $(d + 1)b^0 + db^1 + (d - 1)b^2 + \dots + b^d = O(b^d)$

Space?? $O(bd)$

Optimal??

Properties of iterative deepening search

Complete?? Yes

Time?? $(d + 1)b^0 + db^1 + (d - 1)b^2 + \dots + b^d = O(b^d)$

Space?? $O(bd)$

Optimal?? Yes, if step cost = 1

Can be modified to explore uniform-cost tree

Numerical comparison for $b = 10$ and $d = 5$, solution at far right:

$$N(\text{IDS}) = 50 + 400 + 3,000 + 20,000 + 100,000 = 123,450$$


$$N(\text{BFS}) = 10 + 100 + 1,000 + 10,000 + 100,000 + 999,990 = 1,111,100$$

Summary of algorithms

Criterion	Breadth- First	Uniform- Cost	Depth- First	Depth- Limited	Iterative Deepening
Complete?	Yes*	Yes*	No	Yes, if $l \geq d$	Yes
Time	b^{d+1}	$b^{\lceil C^*/\epsilon \rceil}$	b^m	b^l	b^d
Space	b^{d+1}	$b^{\lceil C^*/\epsilon \rceil}$	bm	bl	bd
Optimal?	Yes*	Yes*	No	No	Yes

Repeated states

Failure to detect repeated states can turn a linear problem into an exponential one!

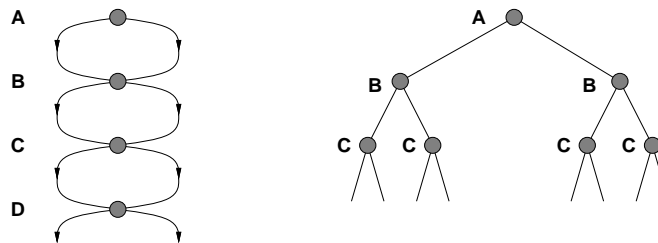

Graph search

```
function GRAPH-SEARCH(problem, fringe) returns a solution, or failure

  closed ← an empty set
  fringe ← INSERT(MAKE-NODE(INITIAL-STATE[problem]), fringe)
  loop do
    if fringe is empty then return failure
    node ← REMOVE-FRONT(fringe)
    if GOAL-TEST[problem](STATE[node]) then return node
    if STATE[node] is not in closed then
      add STATE[node] to closed
      fringe ← INSERTALL(EXPAND(node, problem), fringe)
  end
```

Summary

Problem formulation usually requires abstracting away real-world details to define a state space that can feasibly be explored

Variety of uninformed search strategies

Iterative deepening search uses only linear space and not much more time than other uninformed algorithms