Intelligent Agents

Chapter 2

Outline

- Agents and environments
- Rationality
- PEAS (Performance measure, Environment, Actuators, Sensors)
- Environment types
- Agent types

Agents and environments

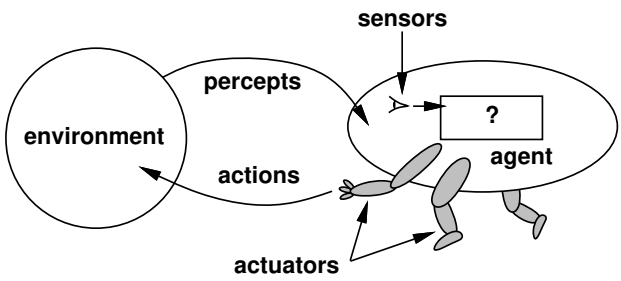

Agents include humans, robots, softbots, thermostats, etc.

The agent function maps from percept histories to actions:

$$f : \mathcal{P}^* \rightarrow \mathcal{A}$$

The agent program runs on the physical architecture to produce f

Vacuum-cleaner world

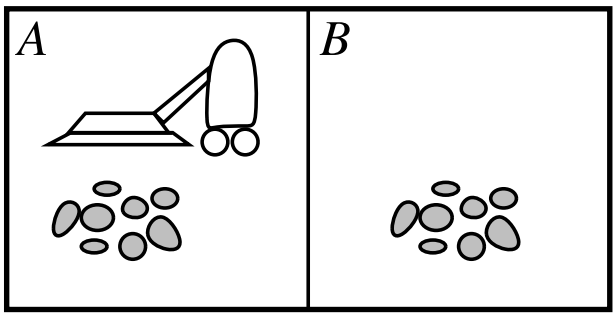

Percepts: location and contents, e.g., $[A, Dirty]$

Actions: $Left$, $Right$, $Suck$, $NoOp$

A vacuum-cleaner agent

Percept sequence	Action
$[A, Clean]$	$Right$
$[A, Dirty]$	$Suck$
$[B, Clean]$	$Left$
$[B, Dirty]$	$Suck$
$[A, Clean], [A, Clean]$	$Right$
$[A, Clean], [A, Dirty]$	$Suck$
$\vdots$	$\vdots$

function REFLEX-VACUUM-AGENT([*location*,*status*]) **returns** an action

if *status* = *Dirty* **then return** *Suck*
else if *location* = *A* **then return** *Right*
else if *location* = *B* **then return** *Left*

What is the right function?
Can it be implemented in a small agent program?

Rationality

Fixed performance measure evaluates the environment sequence

– one point per square cleaned up in time T?

– one point per clean square per time step, minus one per move?

– penalize for $> k$ dirty squares?

A rational agent chooses whichever action maximizes the expected value of the performance measure given the percept sequence to date

Rational $\neq$ omniscient

Rational $\neq$ clairvoyant

Rational $\neq$ successful

Rational $\Rightarrow$ exploration, learning, autonomy

PEAS

To design a rational agent, we must specify the task environment

Consider, e.g., the task of designing an automated taxi:

Performance measure??

Environment??

Actuators??

Sensors??

PEAS

To design a rational agent, we must specify the task environment

Consider, e.g., the task of designing an automated taxi:

Performance measure?? safety, destination, profits, legality, comfort, . . .

Environment?? US streets/freeways, traffic, pedestrians, weather, . . .

Actuators?? steering, accelerator, brake, horn, speaker/display, . . .

Sensors?? video, accelerometers, gauges, engine sensors, keyboard, GPS, . . .

Internet shopping agent

Performance measure??

Environment??

Actuators??

Sensors??

Environment types

	Solitaire	Backgammon	Internet shopping	Taxi
Observable??				
Deterministic??				
Episodic??				
Static??				
Discrete??				
Single-agent??				

Environment types

	Solitaire	Backgammon	Internet shopping	Taxi
Observable??	Yes	Yes	No	No
Deterministic??				
Episodic??				
Static??				
Discrete??				
Single-agent??				

Environment types

	Solitaire	Backgammon	Internet shopping	Taxi
Observable??	Yes	Yes	No	No
Deterministic??	Yes	No	Partly	No
Episodic??				
Static??				
Discrete??				
Single-agent??				

Environment types

	Solitaire	Backgammon	Internet shopping	Taxi
Observable??	Yes	Yes	No	No
Deterministic??	Yes	No	Partly	No
Episodic??	No	No	No	No
Static??				
Discrete??				
Single-agent??				

Environment types

	Solitaire	Backgammon	Internet shopping	Taxi
Observable??	Yes	Yes	No	No
Deterministic??	Yes	No	Partly	No
Episodic??	No	No	No	No
Static??	Yes	Semi	Semi	No
Discrete??				
Single-agent??				

Environment types

	Solitaire	Backgammon	Internet shopping	Taxi
Observable??	Yes	Yes	No	No
Deterministic??	Yes	No	Partly	No
Episodic??	No	No	No	No
Static??	Yes	Semi	Semi	No
Discrete??	Yes	Yes	Yes	No
Single-agent??				

Environment types

	Solitaire	Backgammon	Internet shopping	Taxi
Observable??	Yes	Yes	No	No
Deterministic??	Yes	No	Partly	No
Episodic??	No	No	No	No
Static??	Yes	Semi	Semi	No
Discrete??	Yes	Yes	Yes	No
Single-agent??	Yes	No	Yes (no auctions)	No

The environment type largely determines the agent design

The real world is (of course) partially observable, stochastic, sequential, dynamic, continuous, multi-agent

Agent types

Four basic types in order of increasing generality:

- simple reflex agents
- reflex agents with state
- goal-based agents
- utility-based agents

All these can be turned into learning agents

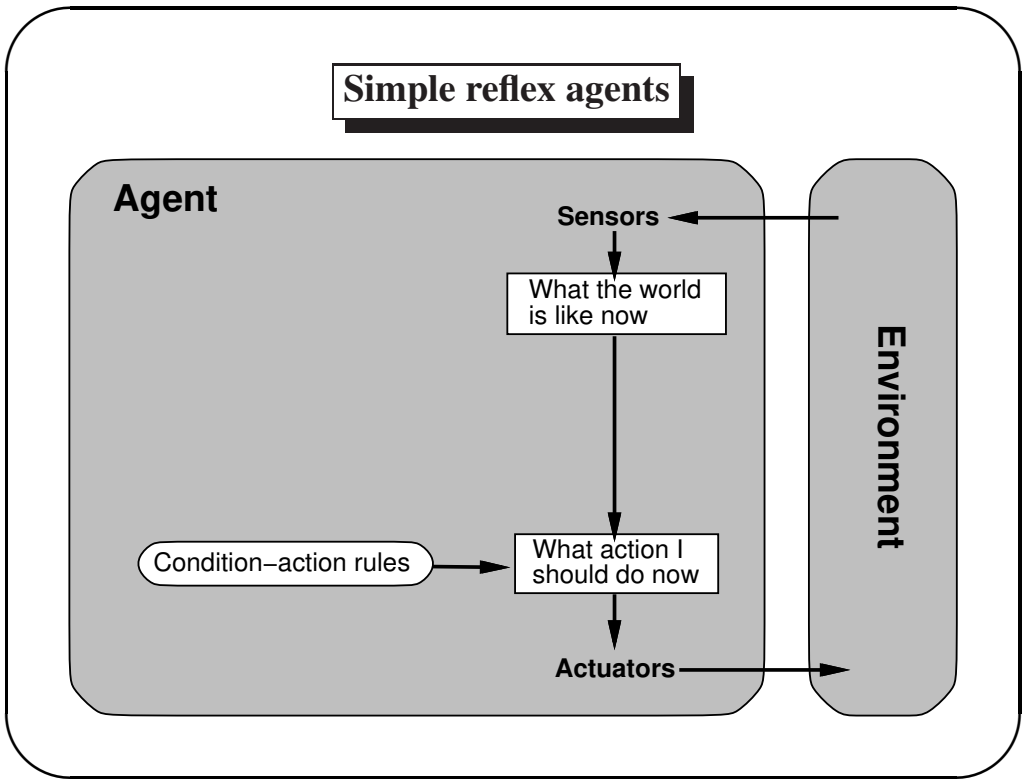
Simple reflex agents
Agent
Sensors
What the world is like now
Environment
Condition–action rules
What action I should do now
Actuators

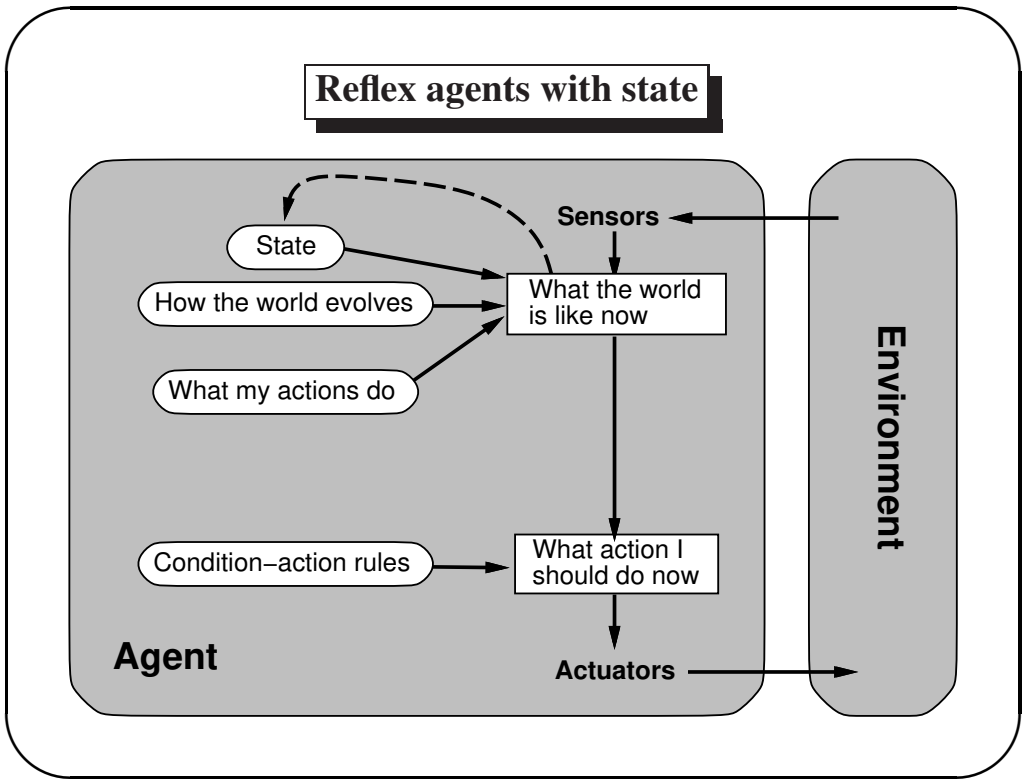
Reflex agents with state
Sensors
State
How the world evolves
What the world is like now
What my actions do
Environment
Condition–action rules
What action I should do now
Agent
Actuators

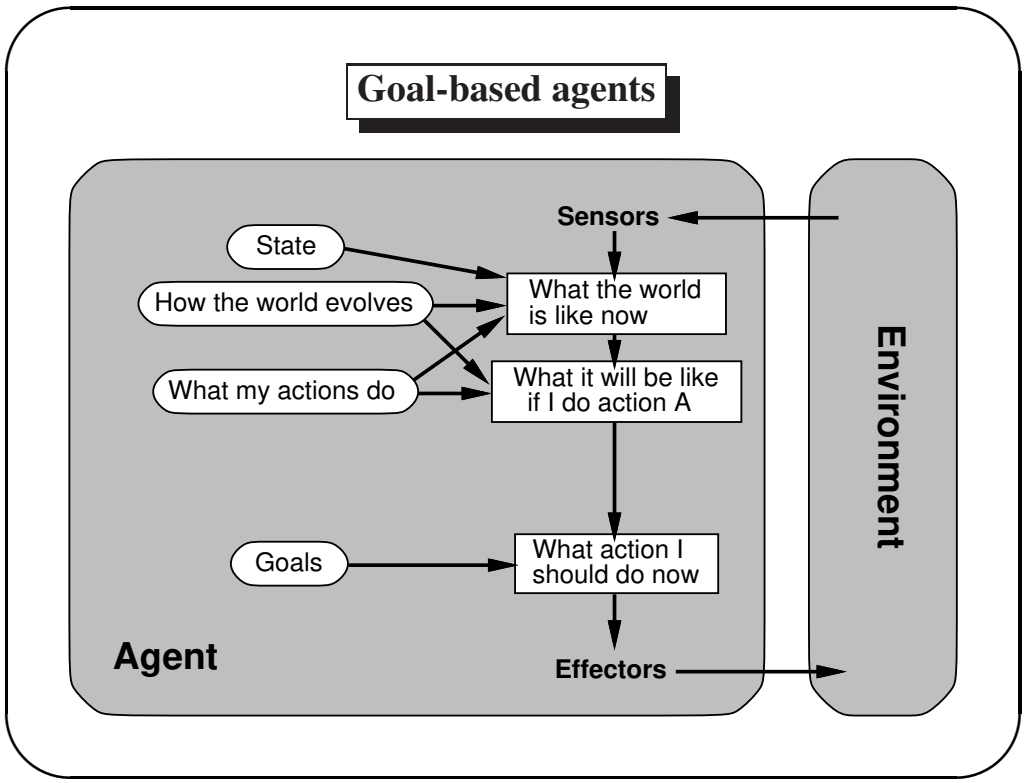
Goal-based agents
Sensors
State
How the world evolves
What my actions do
What the world is like now
What it will be like if I do action A
Goals
What action I should do now
Agent
Effectors
Environment

21

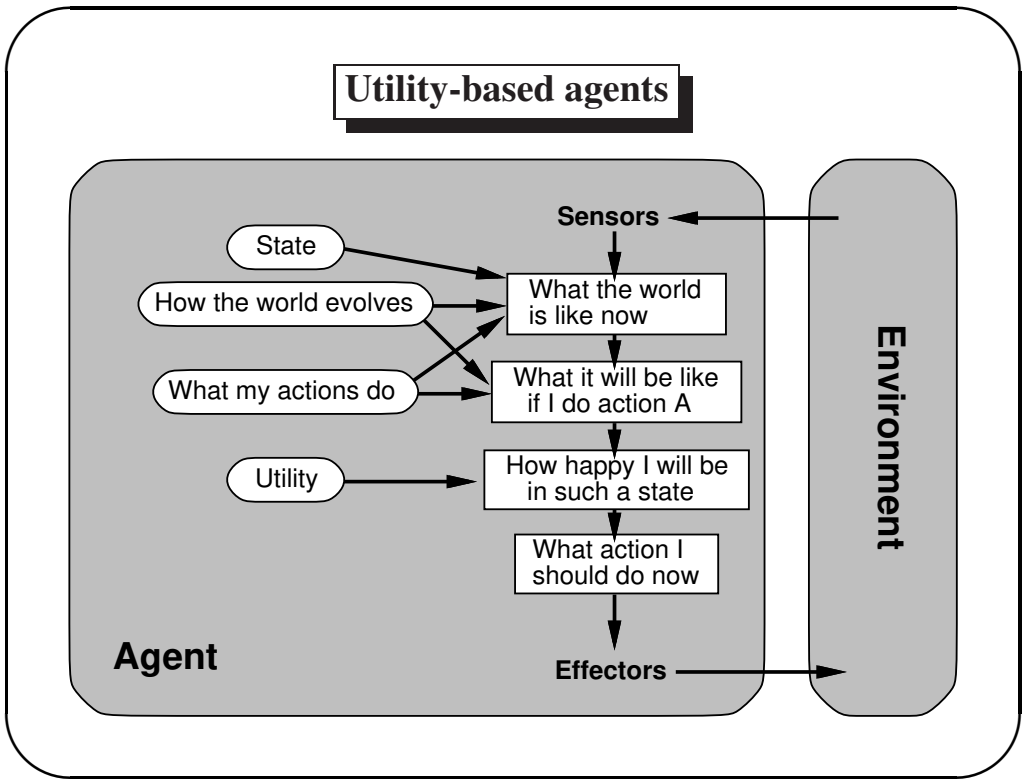
Utility-based agents
Sensors
State
How the world evolves
What my actions do
What the world is like now
What it will be like if I do action A
Utility
How happy I will be in such a state
What action I should do now
Agent
Effectors
Environment

22

Learning agents

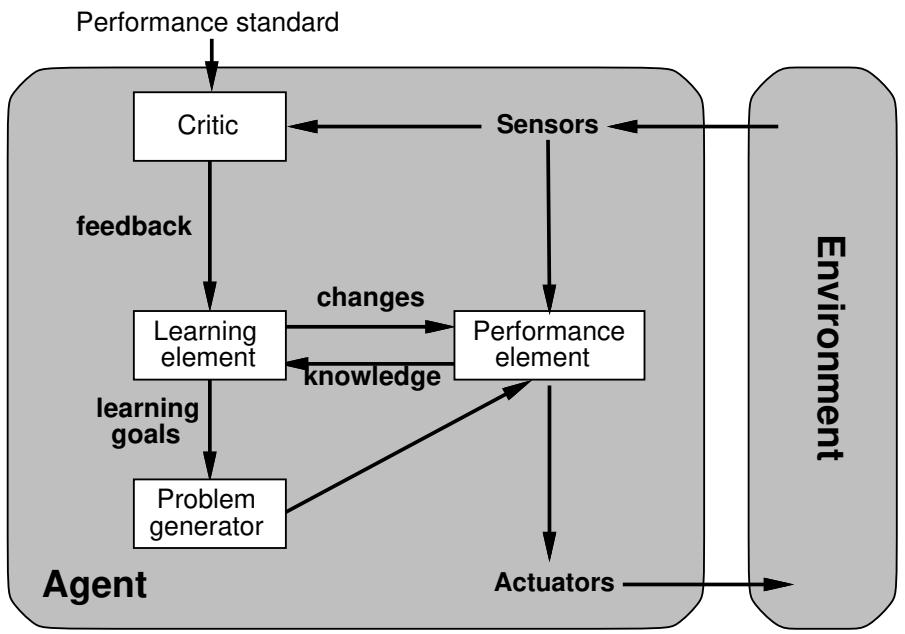

AIMA code

The code for each topic is divided into four directories:

– `agents`: code defining agent types and programs

– `algorithms`: code for the methods used by the agent programs

– `environments`: code defining environment types, simulations

– `domains`: problem types and instances for input to algorithms

(Often run algorithms on domains rather than agents in environments.)

```
(setq joe (make-agent :name 'joe :body (make-agent-body)
                      :program (make-dumb-agent-program)))
(defun make-dumb-agent-program ()
  (let ((memory nil))
    #'(lambda (percept)
        (push percept memory)
        'no-op)))
```